

EXHIBIT 5

EXHIBIT D



US00633973B1

(12) **United States Patent**
Smith et al.

(10) **Patent No.:** **US 6,333,973 B1**
(45) **Date of Patent:** ***Dec. 25, 2001**

(54) **INTEGRATED MESSAGE CENTER**

(75) Inventors: **Colin Donald Smith**, Ottawa; **Brian Finlay Beaton**, Orleans, both of (CA)

(73) Assignee: **Nortel Networks Limited** (CA)

(*) Notice: This patent issued on a continued prosecution application filed under 37 CFR 1.53(d), and is subject to the twenty year patent term provisions of 35 U.S.C. 154(a)(2).

Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **08/842,020**

(22) Filed: **Apr. 23, 1997**

(51) Int. Cl.⁷ **H04M 1/64**; H04M 11/00; H04M 3/42; H04Q 7/20

(52) U.S. Cl. **379/88.12**; 379/67.1; 379/88.11; 379/88.22; 379/93.08; 455/412; 455/413; 455/466

(58) Field of Search 379/88.01, 88.11, 379/93.01, 93.08, 93.17, 100.01, 100.08, 88.22, 111, 112, 113, 211, 230, 246, 88.12, 114.06, 114.07, 88.23, 88.24; 455/445, 517, 417, 459, 419, 433, 466, 422, 38.1, 412, 413, 414; 370/347, 337, 349, 498, 524; 341/20-23

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,228,029 * 7/1993 Kotzin 370/95.1
5,283,638 * 2/1994 Engberg et al. 348/14
5,327,486 * 7/1994 Wolff et al. 379/96
5,533,102 7/1996 Robinson et al. 379/88.25
5,557,659 * 9/1996 Hyde-Thomson 379/88
5,568,540 * 10/1996 Greco et al. 379/88
5,583,920 * 12/1996 Wheeler, Jr. 379/88
5,608,786 * 3/1997 Gordon 379/100
5,719,918 * 2/1998 Serbetcioglu et al. 379/58

5,742,905 * 4/1998 Pepe et al. 455/461
5,794,142 * 8/1998 Vantilla et al. 455/419
5,815,506 * 9/1998 Gokhale 370/524
5,842,141 * 11/1998 Vaihoja et al. 455/574

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

0 630 141 12/1994 (EP) .
0 691 777 1/1996 (EP) .
WO 96 15490 5/1996 (EP) .
8268227 10/1996 (JP) .

OTHER PUBLICATIONS

Hattori et al., "A Multimedia Intelligent Message Communication System for Distributed Coordination Environments," Electronics & Communications in Japan, Part 1—Communications, vol. 76, No. 1, Jan. 1, 1993, pp. 11–23.
"Nokia 9000 Communicator User's Manual," Nokia Corporation, 1996, pp. 1–1 through 16–1 (48 pages total).


Primary Examiner—Allan Hoosain

(74) *Attorney, Agent, or Firm*—Finnegan, Henderson, Farabow, Garrett & Dunner, L.L.P.

(57) **ABSTRACT**

An integrated message center operates on telecommunications equipment, having a display and a processor, to consolidate messages of different types for viewing and manipulation by a user. The telecommunications equipment receives notification messages corresponding to pending messages of different types and determines the message type of the pending messages. The integrated message center associates a message type indicator with each of the received notification messages based on the determined message type and displays on the display a portion of the received notification messages and the associated message type indicators as entries in a single selectable list. The user can select one of the pending messages for retrieval based on the entries in the single selectable list. In response to user selection, the integrated message center retrieves the selected pending message for viewing and manipulation by the user.

33 Claims, 16 Drawing Sheets

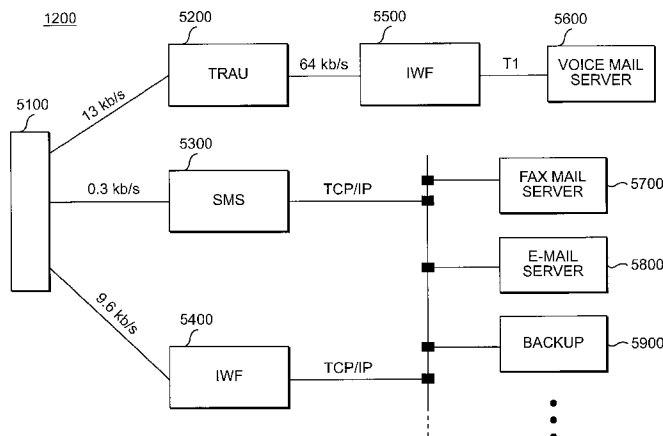

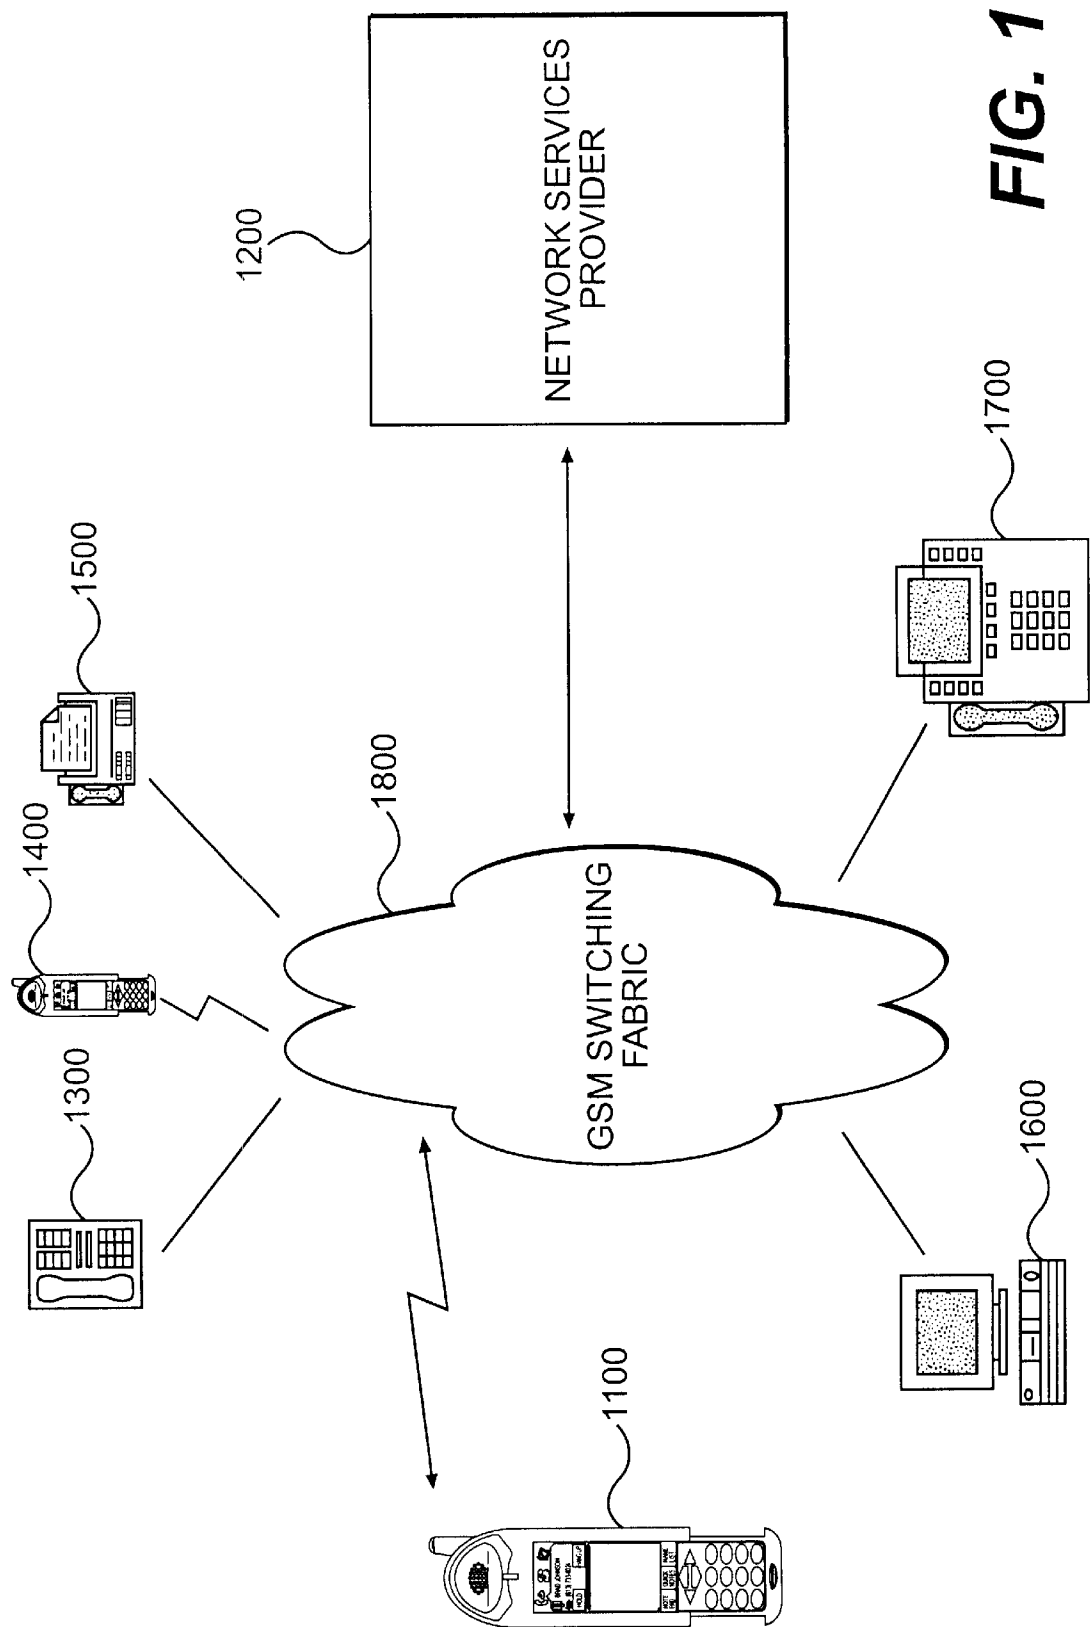


FIG. 1

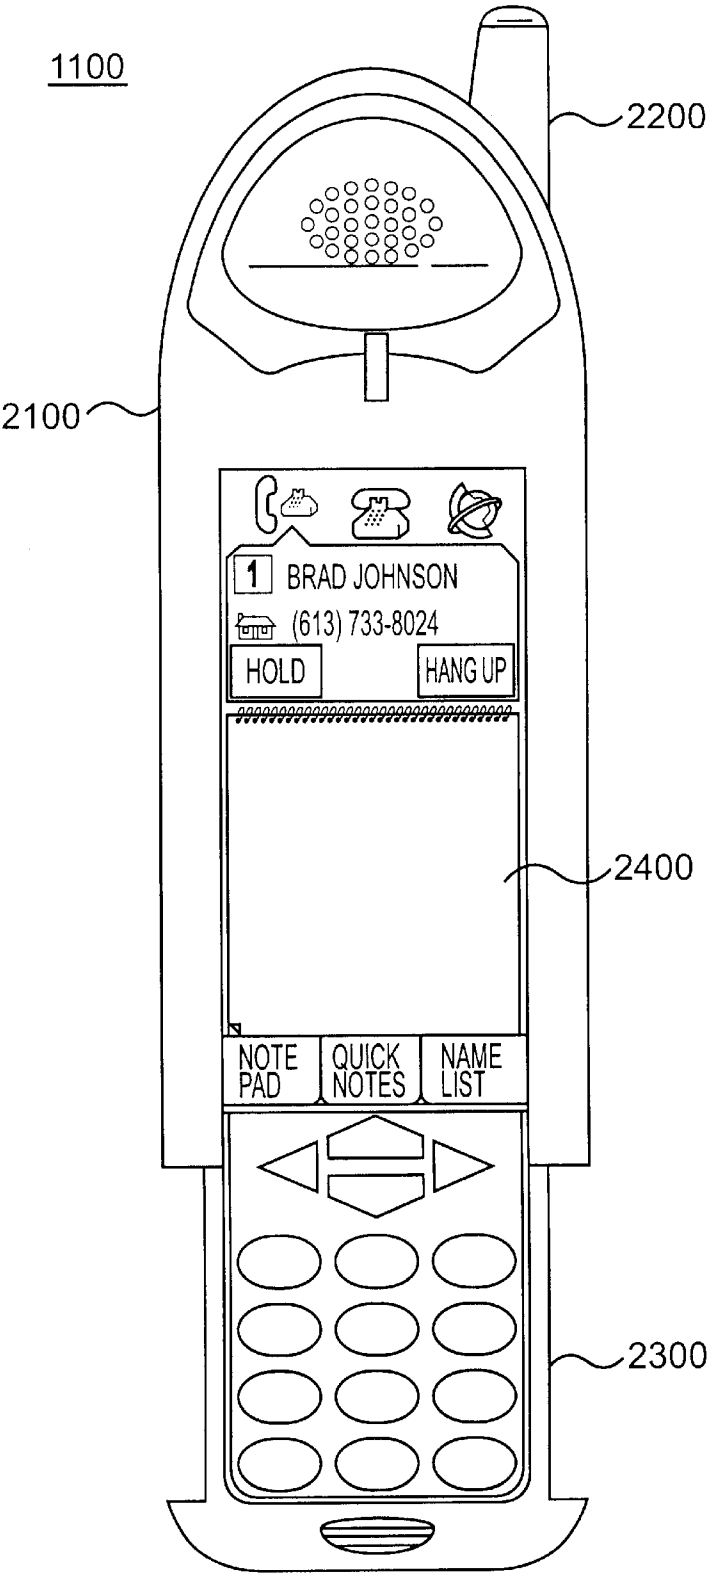


FIG. 2

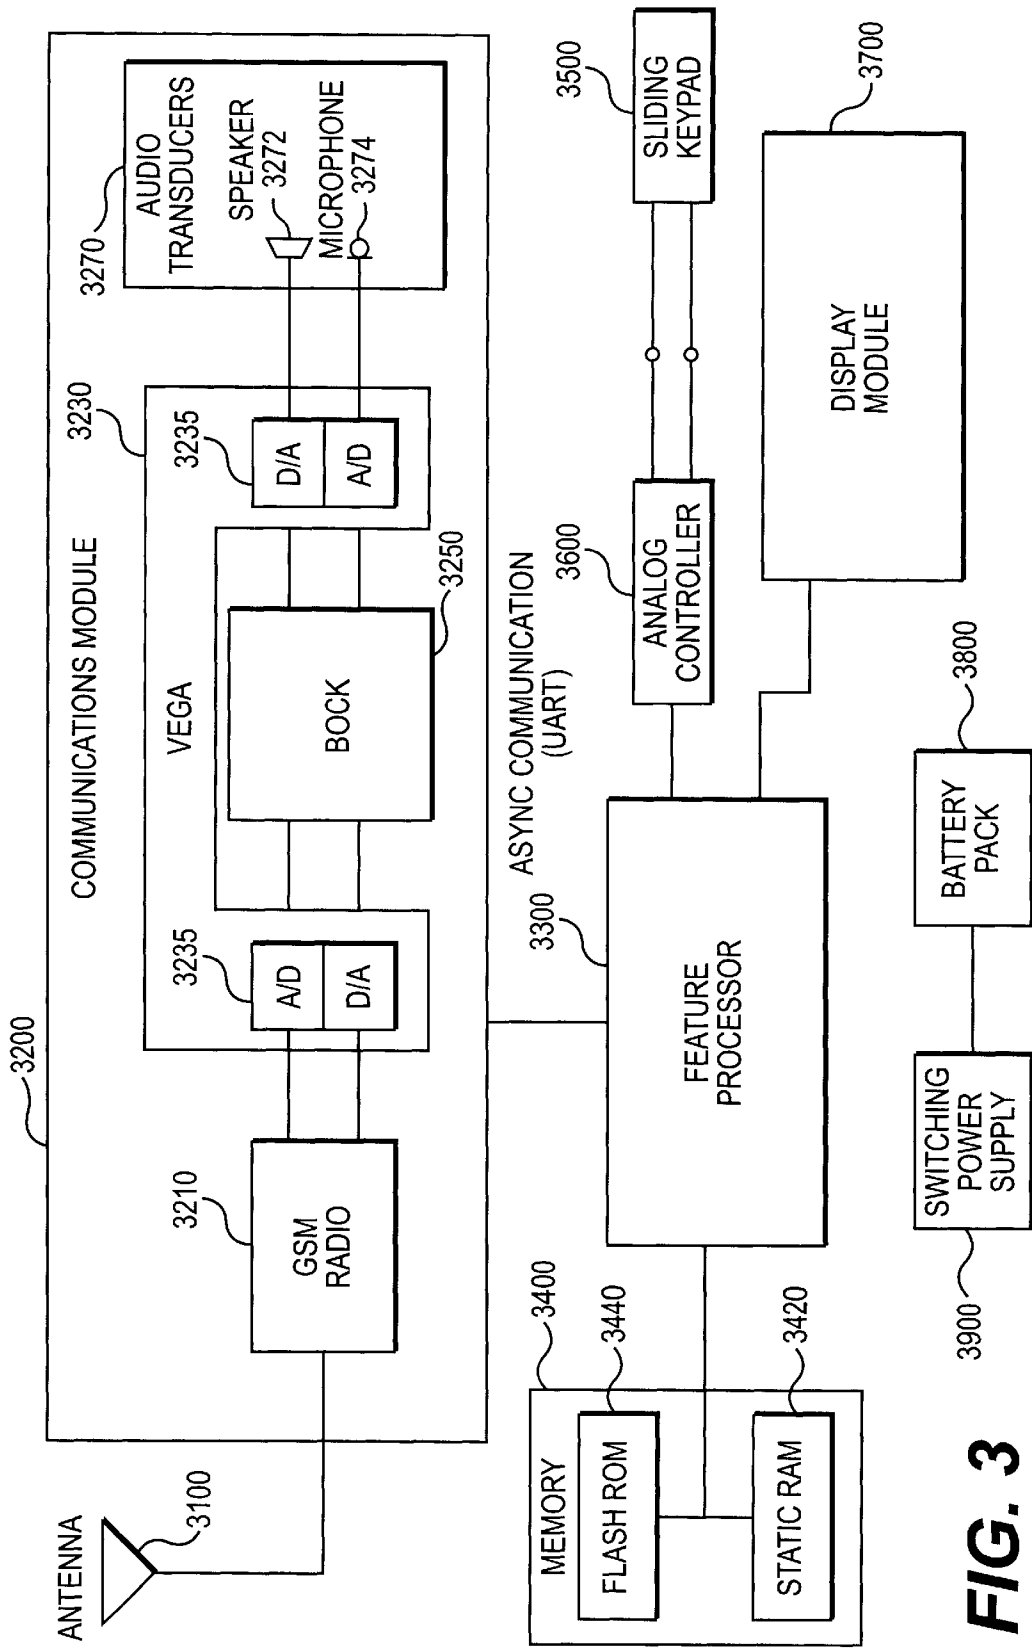


FIG. 3

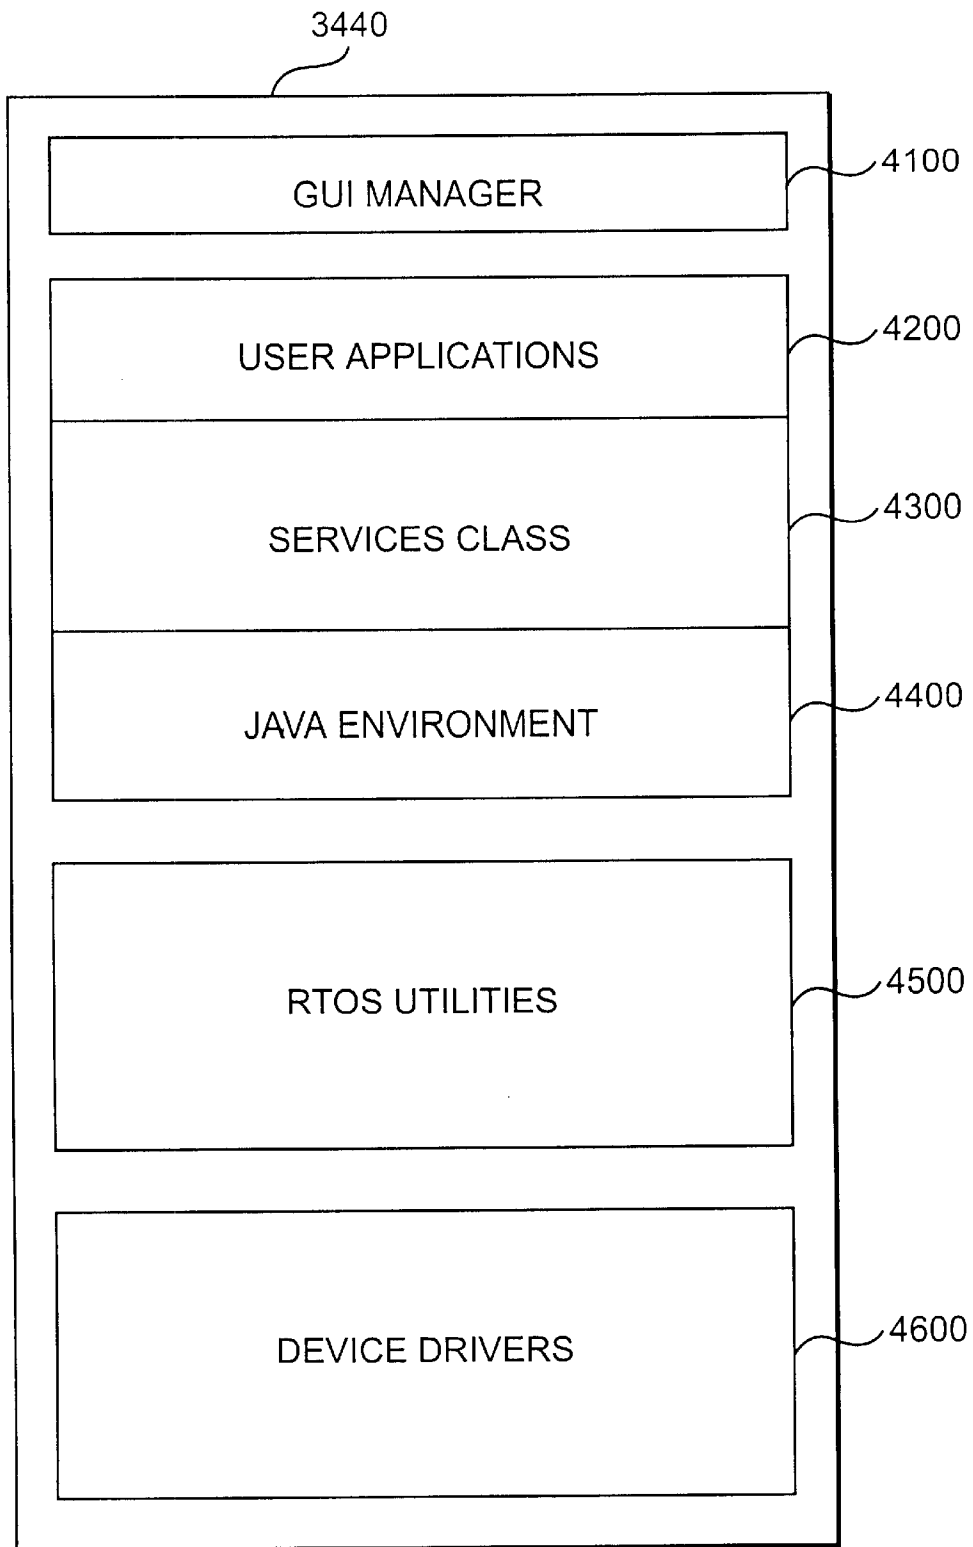


FIG. 4

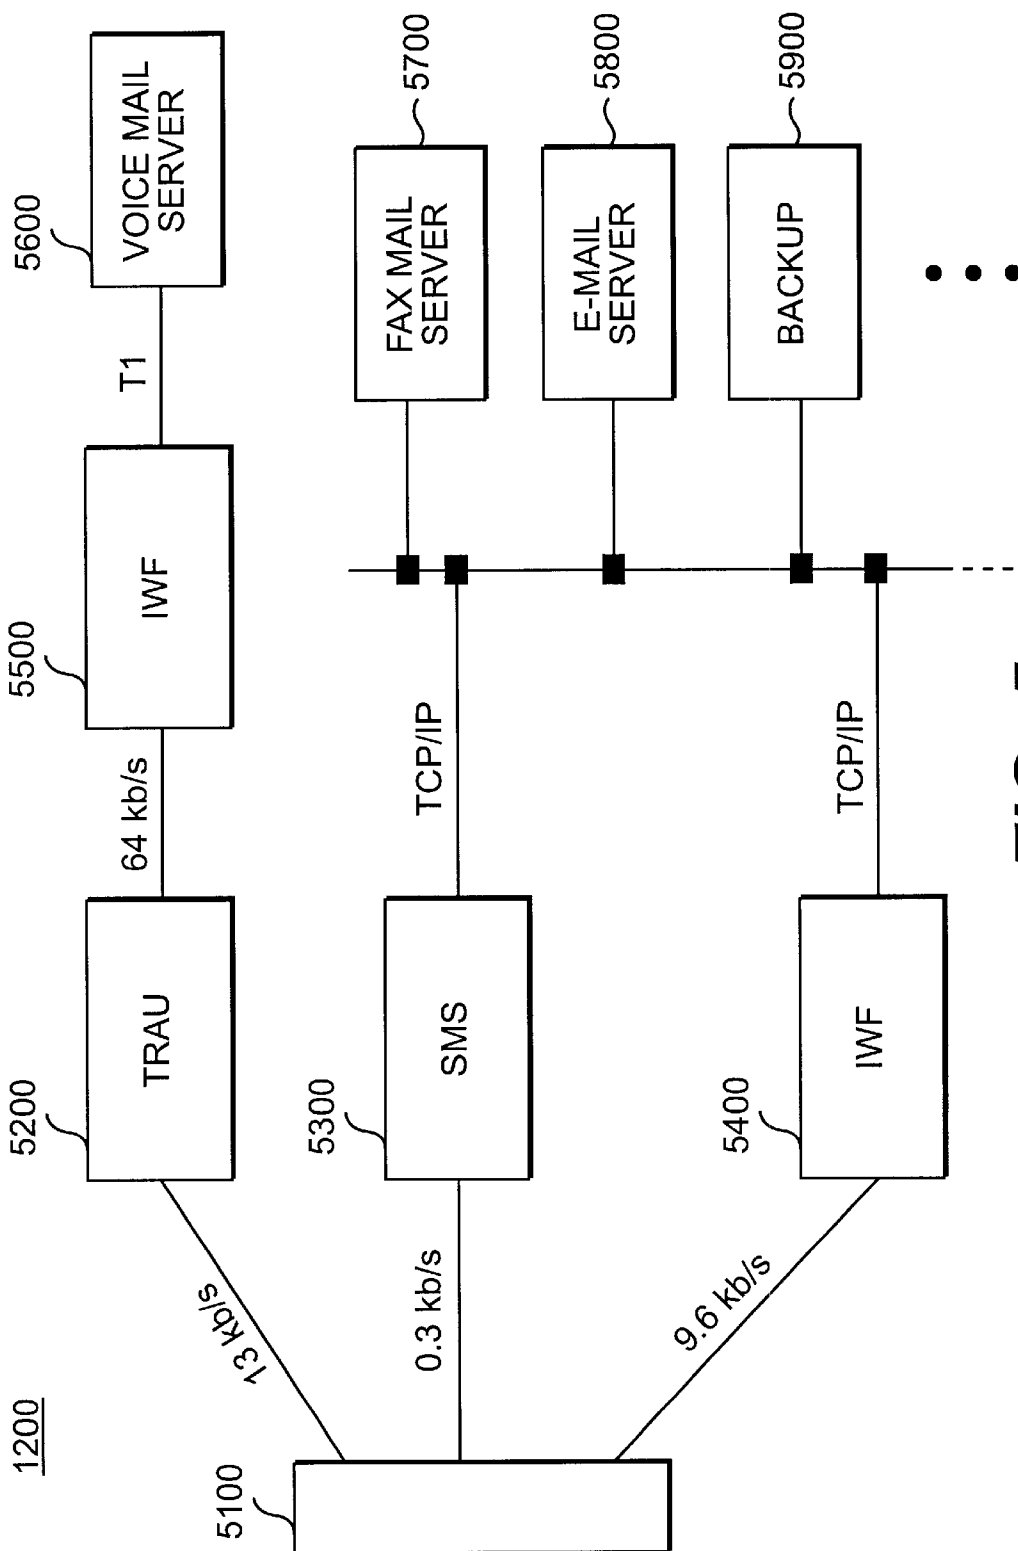


FIG. 5

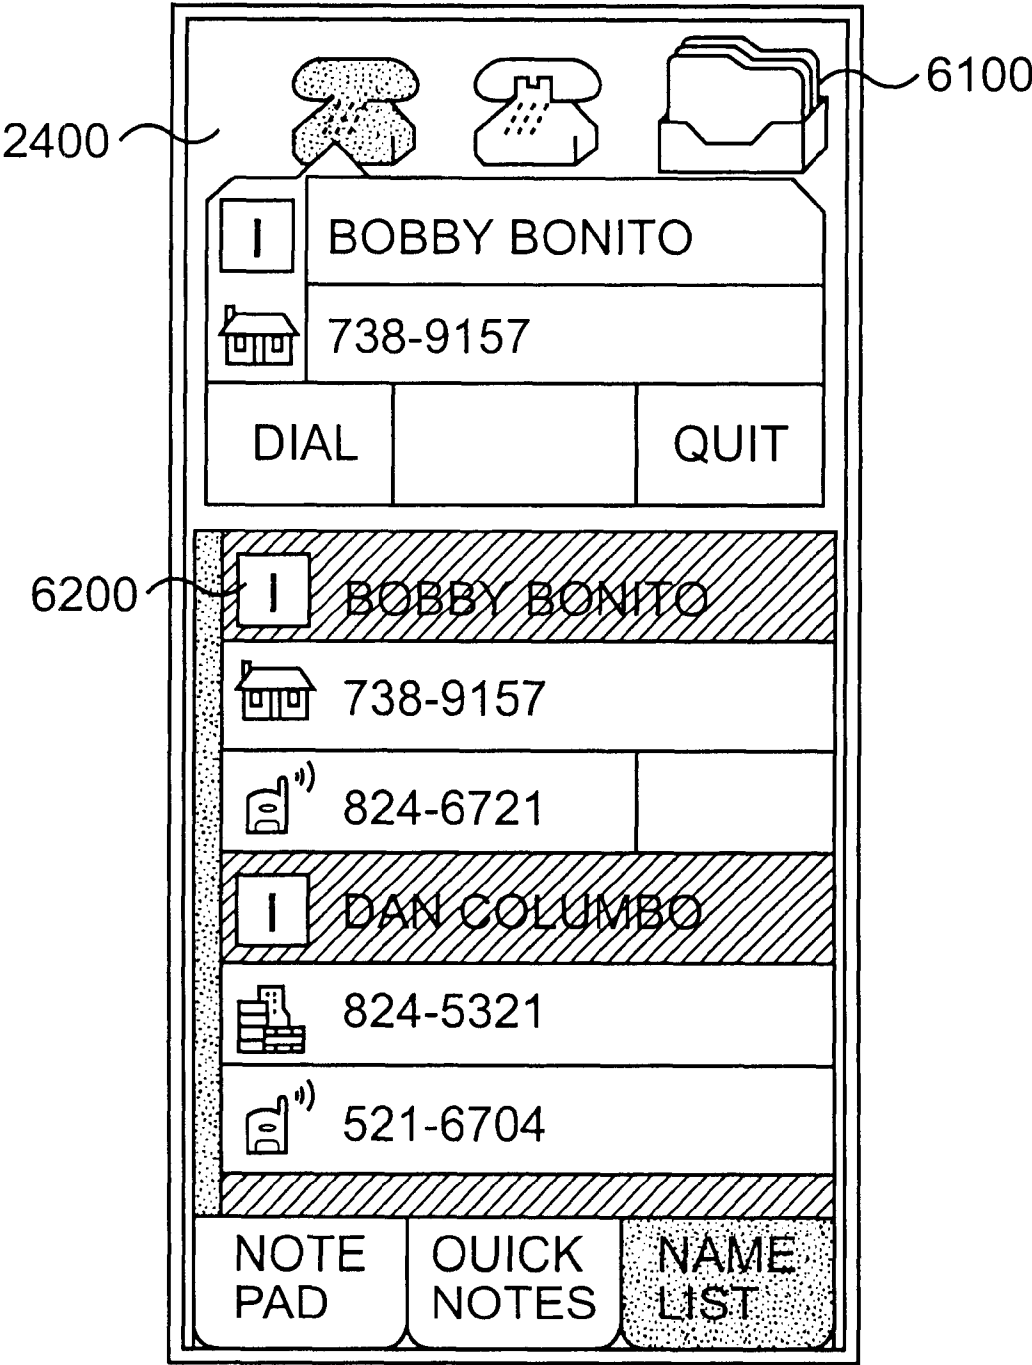


FIG. 6

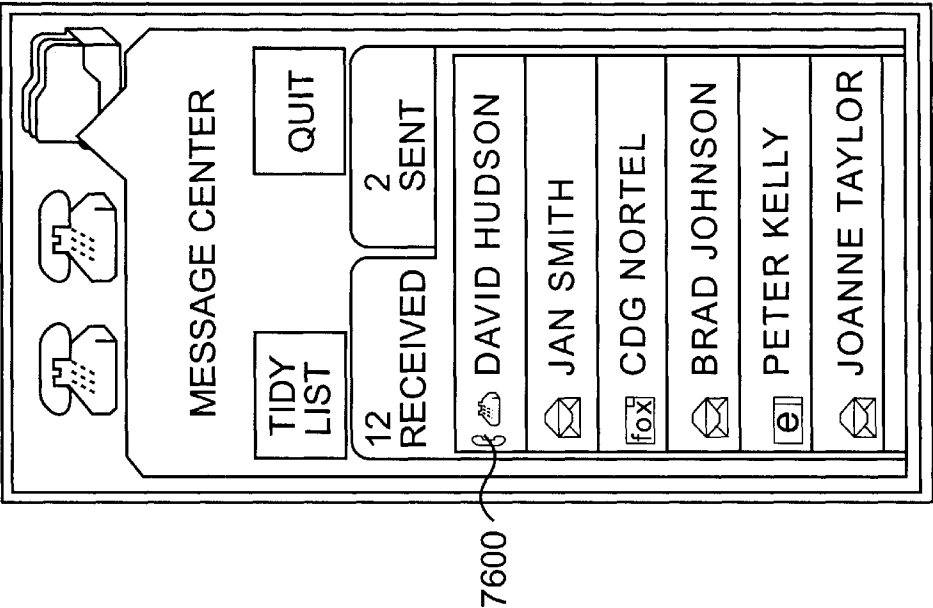


FIG. 7A

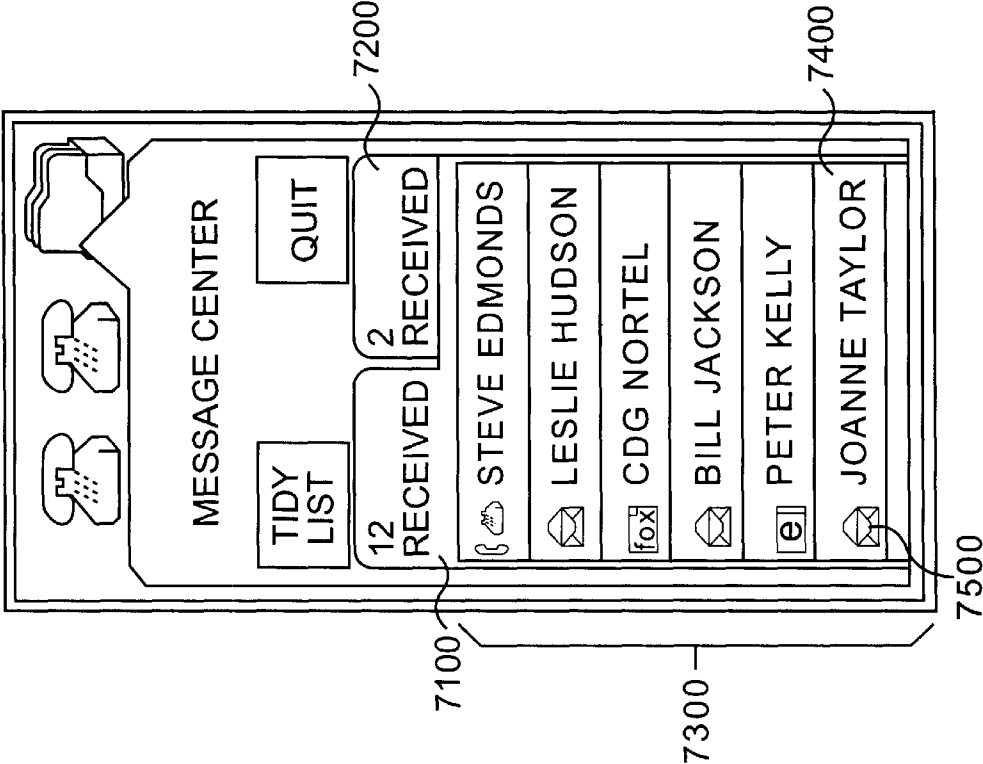


FIG. 7B

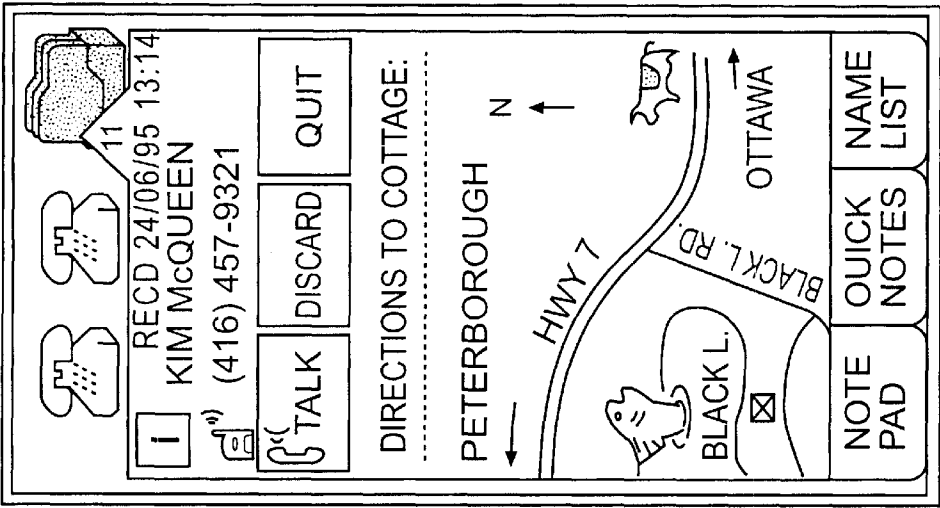


FIG. 8B

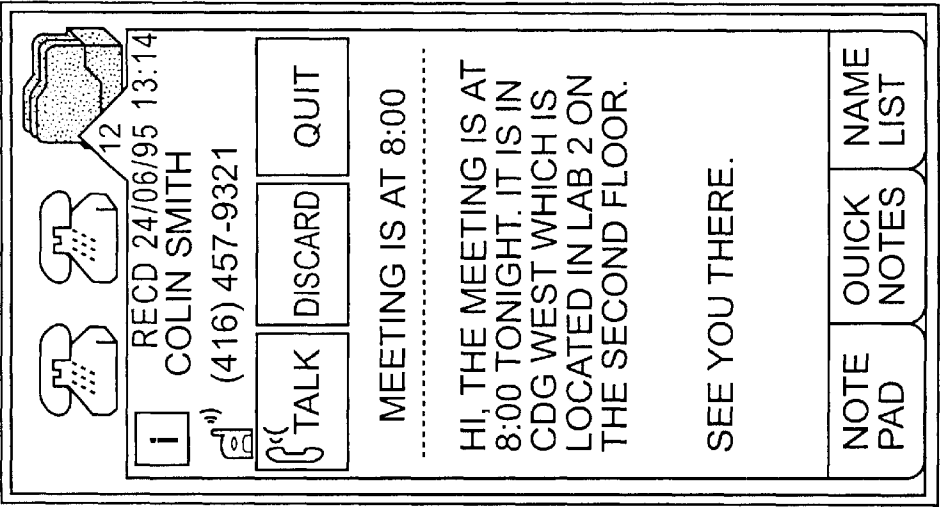


FIG. 8A

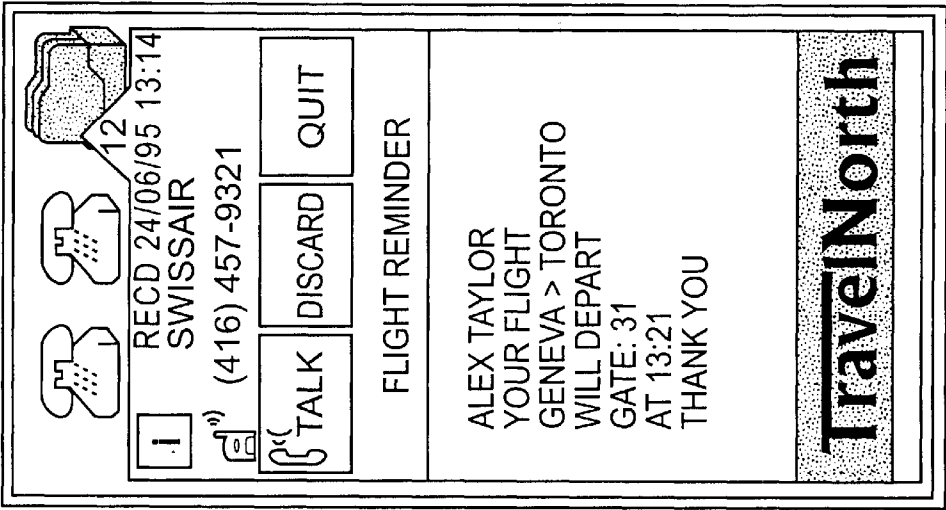


FIG. 9A

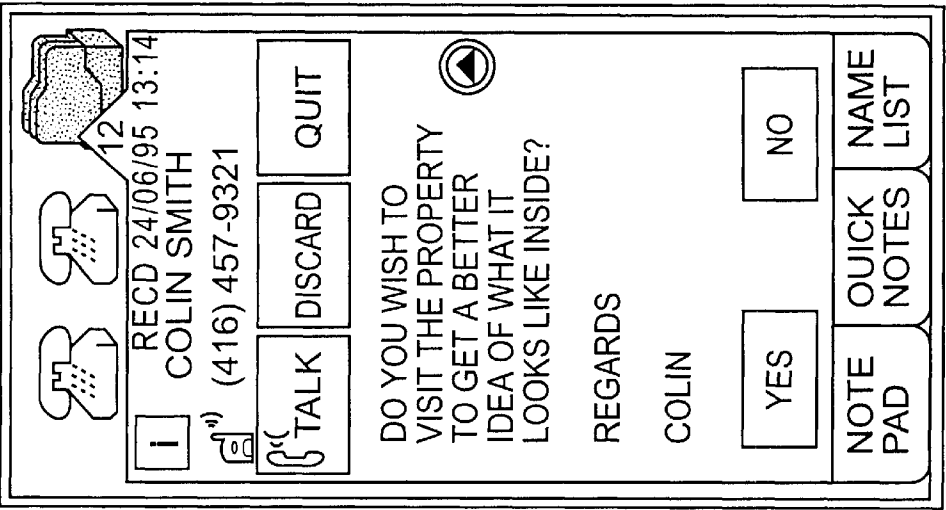


FIG. 9B

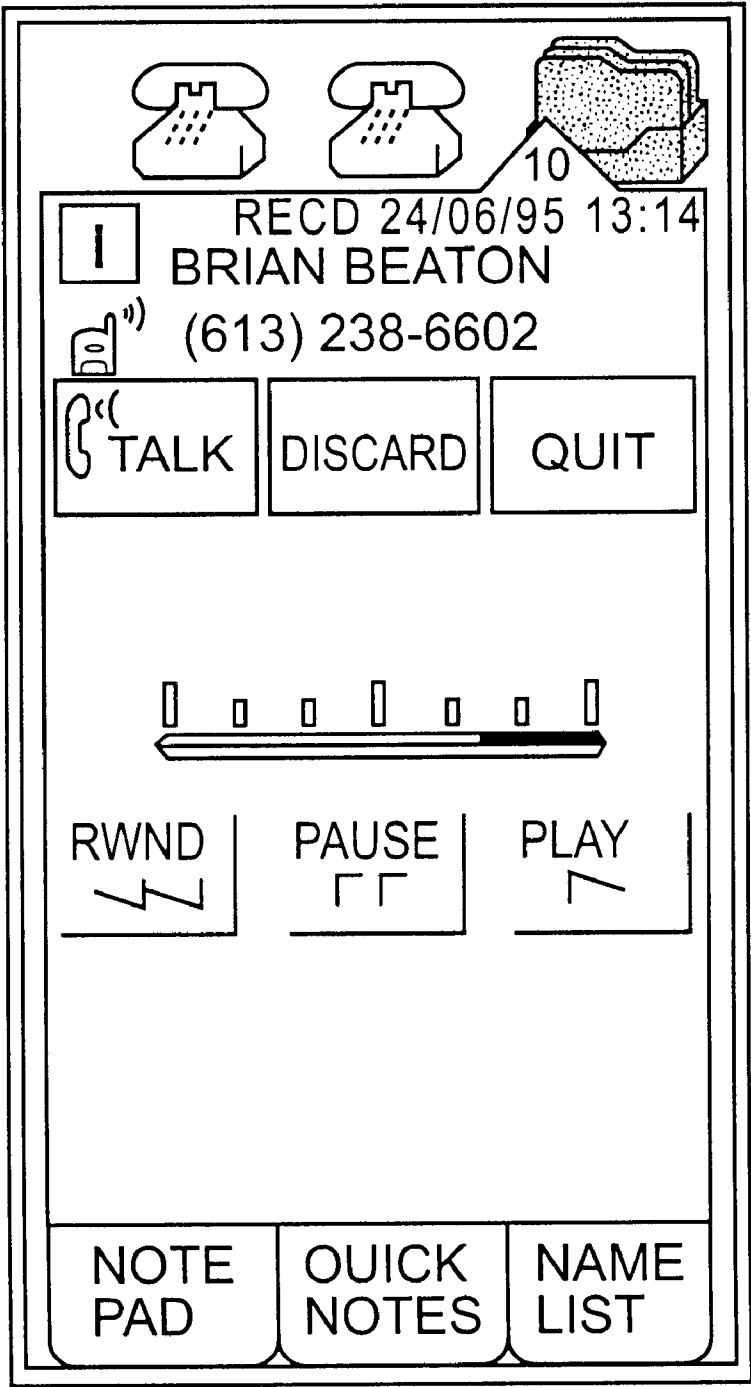


FIG. 10

U.S. Patent

Dec. 25, 2001

Sheet 11 of 16

US 6,333,973 B1

12

RECD 24/06/95 13:14

CDG STUDIO

FAX 765-6775

VIEW DISCARD QUIT

FOEWARD TO:

FAX OFFICE

FAX HOME

FAX OTHER

FAX NAME

FAX NUMBER

NOTE PAD QUICK NOTES NAME LIST

FIG. 11

U.S. Patent

Dec. 25, 2001

Sheet 12 of 16

US 6,333,973 B1

12

RECD 24/06/95 13:14

COLIN SMITH

smith@nortel.ca

TALK DISCARD QUIT

TO: ANDREW CONNELLY

FROM: COLIN SMITH

RE: WEDNESDAY
MORNINGS SALES
MEETING

THE WEDNESDAY
MORNING SALES MEETING
WILL BE HELD AT 9:00

NOTE PAD QUICK NOTES NAME LIST

FIG. 12

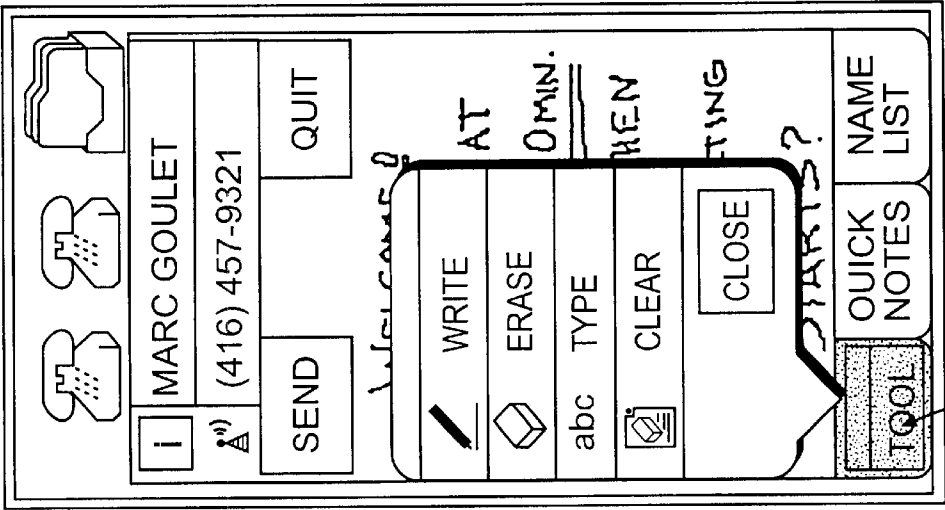


FIG. 13A

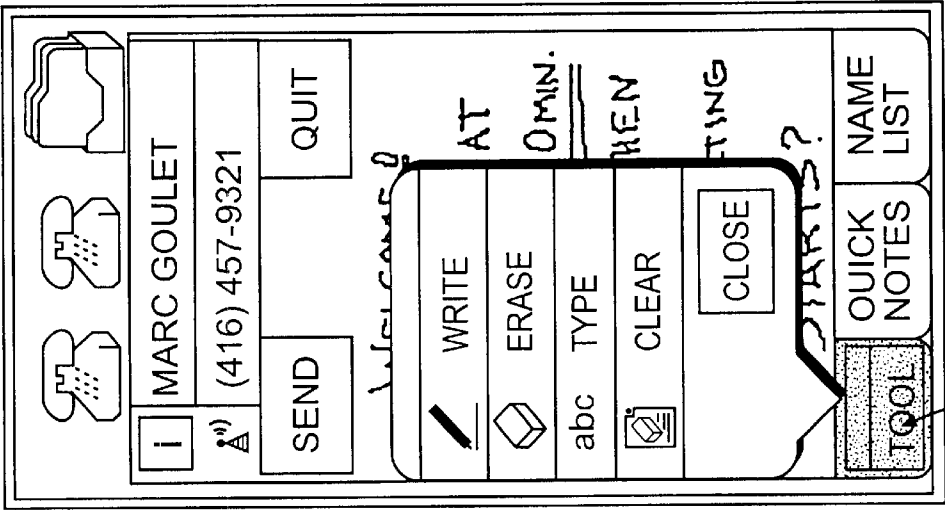


FIG. 13B

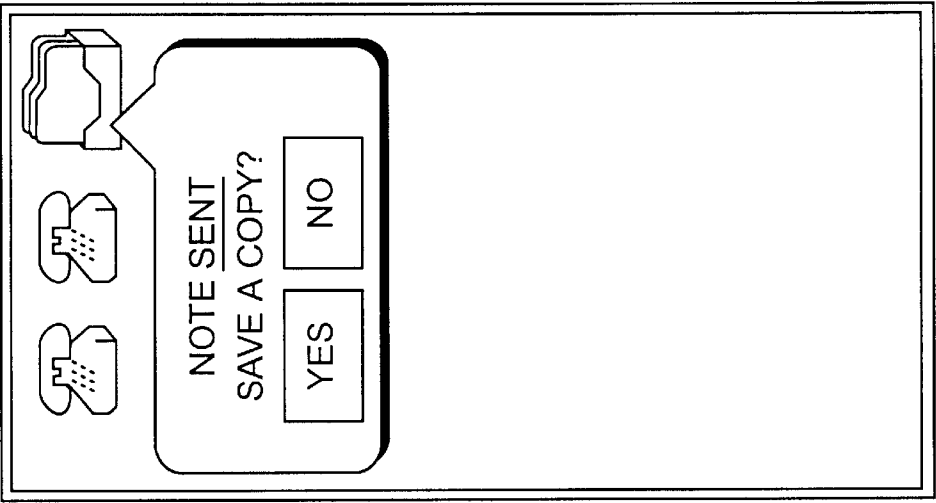


FIG. 13D

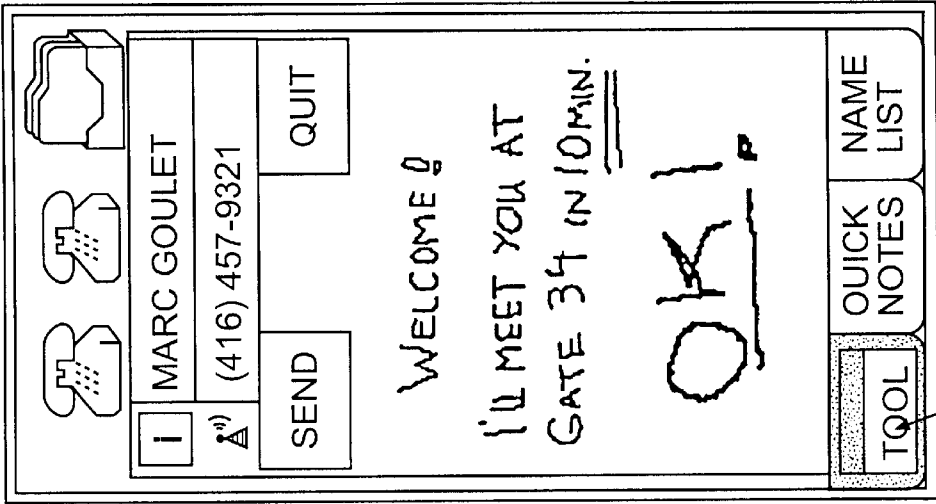


FIG. 13C

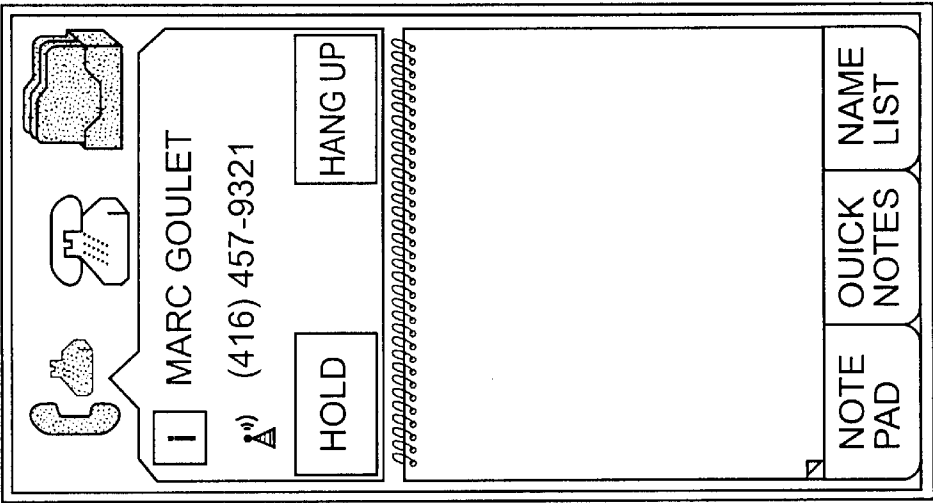


FIG. 14B

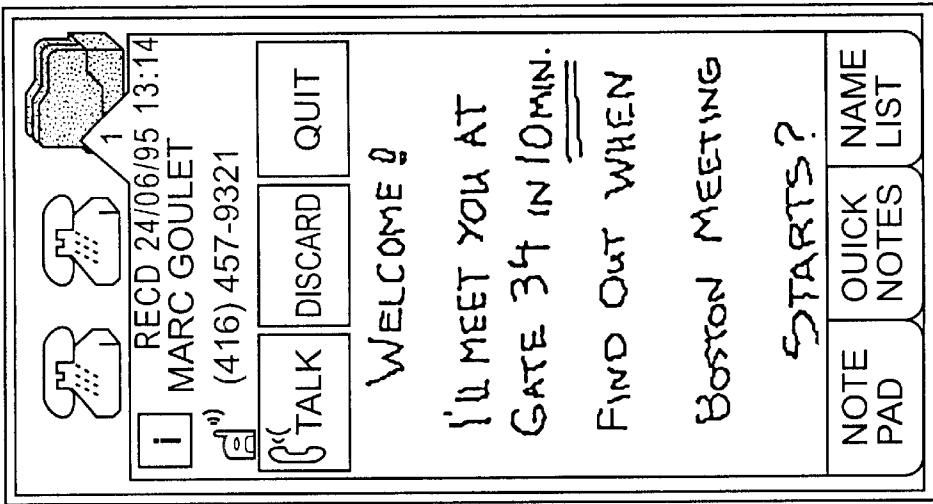


FIG. 14A

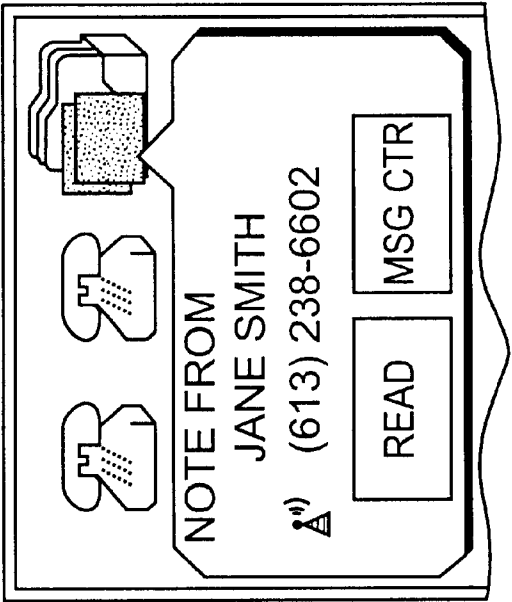


FIG. 15B



FIG. 15A

US 6,333,973 B1

1

INTEGRATED MESSAGE CENTER**RELATED APPLICATIONS**

This application is related to U.S. patent application, Ser. No. 08/842,015, entitled MULTITASKING GRAPHICAL USER INTERFACE; U.S. patent application, Ser. No. 08/841,485, entitled ELECTRONIC BUSINESS CARDS; U.S. patent application, Ser. No. 08/841,486, entitled SCROLLING WITH AUTOMATIC COMPRESSION AND EXPANSION; U.S. patent application, Ser. No. 08/842,019, entitled CLID WITH LOCATION ICON; U.S. patent application, Ser. No. 08/842,017, entitled CLID WITH DRAG AND DROP CAPABILITY; and U.S. patent application, Ser. No. 08/842,036, entitled ICONIZED NAME LIST, all of which were filed concurrently herewith, and all of which are hereby incorporated by reference.

BACKGROUND OF THE INVENTION

This invention relates to the field of message handling, and more specifically to the field of message presentation to a user by which messages of all types are consolidated and graphically displayed in a searchable list to allow for easy graphical scanning, prioritizing, editing, selection, viewing, forwarding, playback, and response by the user.

Traditionally, a user could retrieve only voice messages by calling and interacting with a voice mail service using dual tone multi-frequency (DTMF) commands. Such retrieval of messages, however, required the user to dial the voice mail service and listen to each message, or minimally the header of each message, that is, the name of the person and the time received. This type of voice mail retrieval tended to be a slow and tedious process.

Additionally, the user needed to memorize the DTMF number commands to control the voice mail service. Sometimes these commands were different for the user's home voice mail service and the user's office voice mail service. For example, the user needed to remember that pressing "1" with the office voice mail service, while pressing "6" with the home voice mail service, meant "play the message."

More recently, telephones have been designed with the capability to directly receive, or download, different types of messages, such as faxes, e-mail, and Short Messaging Service (SMS) messages. One conventional mobile telephone has a display, a keypad, and numerous hard keys, and uses menus to enable a user to view different types of received messages.

When a message arrives, an internal processor detects the message type and stores the message in a folder dedicated to the message type. If the telephone receives a fax, for example, the internal processor stores the fax in a fax folder.

When the user opens the cover to the display, the internal processor displays a note indicating the quantity and type of messages received. For example, if two faxes and two SMS messages have been received, the note will show "You have: 2 unread faxes and 2 unread short messages."

If the user wants to view a received message, the user first goes to the main menu and selects the type of message to view. This causes the internal processor to launch a message-type specific application to retrieve the message from the message folder and display it for the user. For example, if the user wants to read a received fax, the user selects "Received faxes" from the main menu. In response, the internal processor launches the fax application to display a list of received faxes. From the list, the user selects a particular fax to read. The fax application then displays the selected fax.

2

If the user then wanted to view a received SMS message, however, the user must return to the main menu to select "Received short messages." In response, the internal processor launches the SMS application to display a list of received SMS messages from which the user selects the desired one.

Telephones of this type, however, suffer from a number of drawbacks. First, they store in their internal memory all received messages, except voice and e-mail messages which are stored at an external server. This wastes precious memory space, and as a result, fewer messages can be locally stored.

Additionally, message handling is cumbersome because the telephones are menu driven and contain separate applications for the different message types. To view different types of messages, the user must follow a series of menus that cause specific applications to be executed.

Therefore, a need exists to integrate different types of messages from different types of equipment into one graphical location to notify the user of pending messages and their type, and to allow the user to view and respond to the messages by simple operation.

SUMMARY OF THE INVENTION

Systems and methods consistent with the present invention address this need by providing an integrated message center that graphically displays different types of received messages together to facilitate user viewing and manipulation of the messages without having to follow a series of menus or launch separate applications.

In accordance with the purpose of the invention as embodied and broadly described herein, an integrated message center consistent with the principles of the present invention operates on telecommunications equipment, having a display and a processor, to consolidate messages of different types for viewing and manipulation by a user. The telecommunications equipment receives notification messages corresponding to pending messages of different types and determines the message type of the pending messages.

The integrated message center associates a message type indicator with each of the received notification messages based on the determined message type and displays on the display a portion of the received notification messages and the associated message type indicators as entries in a single selectable list. The user can select one of the pending messages for retrieval based on the entries in the single selectable list. In response to user selection, the integrated message center retrieves the selected pending message for viewing and manipulation by the user.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate systems and methods consistent with this invention and, together with the description, explain the objects, advantages and principles of the invention. In the drawings,

FIG. 1 is a diagram of a communications network containing the integrated message center consistent with the principles of the present invention;

FIG. 2 is a diagram of the user mobile telephone operating in the network of FIG. 1;

FIG. 3 is a block diagram of the elements included in the user mobile telephone of FIG. 2;

FIG. 4 is a block diagram of the software components stored in the flash ROM of FIG. 3;

US 6,333,973 B1

3

FIG. 5 is a block diagram of the elements included in the network services provider of FIG. 1;

FIG. 6 is an example of an idle screen of the user mobile telephone shown in FIG. 2;

FIGS. 7A and 7B are example displays of received messages;

FIG. 8A is an example display of a received SMS text message;

FIG. 8B is an example display of a received electronic ink message;

FIGS. 9A and 9B are example displays of SMS text messages with hypertext markup language code;

FIG. 10 is an example display in which the user selects to listen to a voice mail message;

FIG. 11 is an example display in which the user selects to forward a fax;

FIG. 12 is an example display of a received e-mail message;

FIGS. 13A through 13D are example displays in which the user responds to an ink message by sending an SMS message;

FIGS. 14A and 14B are example displays in which the user responds to an ink message by establishing a voice call; and

FIGS. 15A and 15B are example displays in which the user receives a voice call and an SMS message, respectively.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following detailed description of the invention refers to the accompanying drawings that illustrate preferred embodiments consistent with the principles of this invention. Other embodiments are possible and changes may be made to the embodiments without departing from the spirit and scope of the invention. The following detailed description does not limit the invention. Instead, the scope of the invention is defined only by the appended claims.

The integrated message center consistent with the principles of the present invention displays different types of received messages in a single display and permits manipulation of the messages by a user, such that the user can view, discard, forward, and respond to any type of message without the need to launch different applications.

I. System Architecture

FIG. 1 is a diagram of a communications network containing the integrated message center consistent with the principles of the present invention. The integrated message center is a logical entity that resides in mobile telephone 1100 and operates in conjunction with network services provider 1200 to inform a user of incoming and pending messages, such as fax mail, e-mail, voice mail, etc. The integrated message center also serves as a mechanism by which the user can retrieve, manipulate, and reply to all types of messages. User manipulation of the pending messages might include the ability to view, prioritize, edit, playback, discard, and/or forward messages.

The user uses mobile telephone 1100 to view messages from callers having different types of caller equipment, such as ordinary telephone 1300, caller mobile telephone 1400 which is similar to user mobile telephone 1100, facsimile equipment 1500, computer 1600, and Analog Display Services Interface (ADSI) telephone 1700. The callers leave different types of messages for the user, depending upon the type of caller equipment.

4

Network services provider 1200 stores many of the messages awaiting retrieval by the user and notifies the user of the pending messages. Subscriber mobile telephone 1100 and caller equipment 1300 through 1700 communicate with network services provider 1200 over a communications network, such as Global System for Mobile Communications (GSM) switching fabric 1800.

While FIG. 1 shows caller equipment 1300 through 1700 directly connected to GSM switching fabric 1800, this is not typically the case. Telephone 1300, facsimile equipment 1500, computer 1600, and ADSI telephone 1700 normally connect to GSM switching fabric 1800 via another type of network, such as a Public Switched Telephone Network (PSTN).

When a caller uses telephone 1300 to communicate with the user, the caller dials the telephone number corresponding to mobile telephone 1100. If the user does not answer the call for a predetermined number of rings, or upon direction of the user (to be described), the call routes to network services provider 1200 over GSM switching fabric 1800 by conventional mechanisms. Network services provider 1200 stores the message left by the caller as voice mail and sends a short message to mobile telephone 1100, notifying the user of the pending voice mail message.

When the caller uses caller mobile telephone 1400 to communicate with the user, the caller may either call the user, as described above with regard to telephone 1300, or may send the user a Short Messaging Service (SMS) message. GSM networks typically include an SMS server that provides the SMS service. The SMS service is an error-free, guaranteed delivery transport mechanism by which callers can send short point-to-point messages, i.e., SMS messages, through the GSM network, such as GSM switching fabric 1800, in a GSM signaling channel, simultaneously with, or without, a voice or data call.

GSM protocol limits the length of the standard SMS text message to a maximum of 140 bytes. However, GSM protocol permits longer messages to be formed by concatenating several messages together, transparent to the caller. Because GSM protocol transparently performs this concatenating of messages, the caller sees no restriction on message length.

If the caller chooses to send the user an SMS message, the caller inputs the message data, and selects a destination corresponding to the user. GSM switching fabric 1800 routes the message to an SMS server that services the area containing mobile telephone 1100, and the SMS server, in turn, relays the message to the user.

When the caller uses facsimile equipment 1500 to send a fax to the user, the caller dials the fax telephone number corresponding to network services provider 1200. The caller sends the fax to network services provider 1200. Network services provider 1200 stores the fax and then sends a short message to mobile telephone 1100, notifying the user of the pending fax.

When the caller uses computer 1600 to send an e-mail message to the user, the caller enters the message into the computer and affixes the user's e-mail address. The user's e-mail address directs the e-mail message to network services provider 1200. Network services provider 1200 stores the e-mail message, and then sends a short message to mobile telephone 1100, notifying the user of the pending e-mail message.

When the caller uses ADSI telephone 1700 to communicate with the user, the caller dials the telephone number corresponding to mobile telephone 1100, as described above

US 6,333,973 B1

5

with regard to telephone **1100**. If the user does not answer the call for a predetermined number of rings, or upon direction of the user, the call routes to network services provider **1200** over GSM switching fabric **1800** by conventional mechanisms. Network services provider **1200** stores the message left by the caller as voice mail and sends a short message to mobile telephone **1100**, notifying the user of the pending voice mail message.

Mobile telephone **1100** provides a user friendly interface to facilitate message retrieval, manipulation, and response by the user. FIG. 2 is a diagram of mobile telephone **1100**, including main housing **2100**, antenna **2200**, keypad **2300**, and display **2400**.

FIG. 3 is a block diagram of the hardware elements of mobile telephone **1100**, including antenna **3100**, communications module **3200**, feature processor **3300**, memory **3400**, sliding keypad **3500**, analog controller **3600**, display module **3700**, battery pack **3800**, and switching power supply **3900**.

Antenna **3100** transmits and receives radio frequency information for mobile telephone **1100**. Antenna **3100** preferably comprises a planar inverted F antenna (PIFA)-type or a short stub (2 to 4 cm) custom helix antenna. Antenna **3100** communicates over GSM switching fabric **1800** using a conventional voice B-channel, data B-channel, or GSM signaling channel connection.

Communications module **3200** connects to antenna **3100** and provides the GSM radio, baseband, and audio functionality for mobile telephone **1100**. Communications module **3200** includes GSM radio **3210**, VEGA **3230**, BOCK **3250**, and audio transducers **3270**.

GSM radio **3210** converts the radio frequency information to/from the antenna into analog baseband information for presentation to VEGA **3230**. VEGA **3230** is preferably a Texas Instruments VEGA device, containing analog-to-digital (A/D)/digital-to-analog (D/A) conversion units **3235**. VEGA **3230** converts the analog baseband information from GSM radio **3210** to digital information for presentation to BOCK **3250**.

BOCK **3250** is preferably a Texas Instruments BOCK device containing a conventional ARM microprocessor and a conventional LEAD DSP device. BOCK **3250** performs GSM baseband processing for generating digital audio signals and supporting GSM protocols. BOCK **3250** supplies the digital audio signals to VEGA **3230** for digital-to-analog conversion. VEGA **3230** applies the resulting analog audio signals to audio transducers **3270**. Audio transducers **3270** include speaker **3272** and microphone **3274** to facilitate audio communication by the user.

Feature processor **3300** provides graphical user interface features and a Java Virtual Machine (JVM). Feature processor **3300** communicates with BOCK **3250** using high level messaging over an asynchronous (UART) data link. Feature processor **3300** contains additional system circuitry, such as a liquid crystal display (LCD) controller, timers, UART and bus interfaces, and real time clock and system clock generators (not shown).

Memory **3400** stores data and program code used by feature processor **3300**. Memory **3400** includes static RAM **3420** and flash ROM **3440**. Static RAM **3420** is a volatile memory that stores data and other information used by feature processor **3300**.

Flash ROM **3440** is a non-volatile memory that stores the program code and directories utilized by feature processor **3300**. FIG. 4 is a block diagram of the software components of flash ROM **3440**. ROM **3440** includes graphical user interface (GUI) manager **4100**, user applications **4200**, ser-

6

vice classes **4300**, Java environment **4400**, real time operating system (RTOS) utilities **4500**, and device drivers **4600**.

GUI manager **4100** acts as an application and window manager. GUI manager **4100** oversees the user interface by allowing the user to select, run, and otherwise manage applications.

User applications **4200** contain all the user-visible applications and network service applications. User applications **4200** preferably include a call processing application for processing incoming and outgoing voice calls, a message processing application for sending and receiving short messages, a directory management application for managing database entries in the form of directories, a web browser application, and other various applications.

Service classes **4300** provide a generic set of application programming facilities shared by user applications **4200**. Service classes **4300** preferably include various utilities and components, such as a Java telephony application interface, a voice and data manager, directory services, voice mail components, text/ink note components, e-mail components, fax components, network services management, and other miscellaneous components and utilities.

Java environment **4400** preferably includes a JVM and the necessary run-time libraries for executing applications written in the Java™ programming language.

RTOS utilities **4500** provide real time tasks, low level interfaces, and native implementations to support Java environment **4400**. RTOS utilities **4500** preferably include Java peers, such as networking peers and Java telephony peers, optimized engines requiring detailed real time control and high performance, such as recognition engines and speech processing, and standard utilities, such as protocol stacks, memory managers, and database packages.

Device drivers **4600** provide access to the hardware elements of mobile telephone **1100**. Device drivers **4600** include, for example, drivers for sliding keypad **3500** and display module **3700**.

Returning to FIG. 3, sliding keypad **3500** enables the user to dial a telephone number, access remote databases and servers, and manipulate the graphical user interface features. Sliding keypad **3500** preferably includes a mylar resistive key matrix that generates analog resistive voltage in response to actions by the user. Sliding keypad **3500** preferably connects to main housing **2100** (FIG. 2) of mobile telephone **1100** through two mechanical "push pin"-type contacts.

Analog controller **3600** is preferably a Phillips UCB1100 device that acts as an interface between feature processor **3300** and sliding keypad **3500**. Analog controller **3600** converts the analog resistive voltage from sliding keypad **3500** to digital signals for presentation to feature processor **3300**.

Display module **3700** is preferably a 160 by 320 pixel LCD with an analog touch screen overlay and an electroluminescent backlight. Display module **3700** operates in conjunction with feature processor **3300** to display the graphical user interface features.

Battery pack **3800** is preferably a single lithium-ion battery with active protection circuitry. Switching power supply **3900** ensures highly efficient use of the lithium-ion battery power by converting the voltage of the lithium-ion battery into stable voltages used by the other hardware elements of mobile telephone **1100**.

These hardware elements of mobile telephone **1100** permit the user to communicate with network services provider

US 6,333,973 B1

7

1200 (FIG. 1) to retrieve pending messages. FIG. 5 is a block diagram of the elements of network services provider **1200**, including interface **5100**, transcoder and rate adapter unit (TRAU) **5200**, SMS server **5300**, interworking function (IWF) servers **5400** and **5500**, voice mail server **5600**, fax mail server **5700**, e-mail server **5800**, and backup **5900**.

Interface **5100** interfaces the elements of network services provider **1200** to GSM switching fabric **1800**. TRAU **5200** performs GSM-specific speech encoding and decoding and rate adaption of voice signals received from mobile telephone **1100** for transmission to a destination network, such as a PSTN, and vice versa. TRAU **5200** is a conventional hardware device that converts, for example, voice signals to or from 64 kb/s pulse code modulated (PCM) and 13 kb/s RPE-LTP signals.

SMS server **5300** provides the SMS service for GSM switching fabric **1800**. SMS server **5300** is a conventional hardware device that processes SMS messages. SMS server **5300** preferably relays SMS messages to or from mobile telephone **1100**, and notifies the user of pending messages via SMS notification messages. SMS server **5300** transmits SMS messages, including notification messages, on mobile telephone **1100**'s GSM signaling channel, which is independent of mobile telephone **1100**'s voice and data B-channels.

IWF servers **5400** and **5500** convert data received from mobile telephone **1100** to a format suitable for transmission to a destination network. IWF servers **5400** and **5500** are conventional hardware devices that provide an interface between dissimilar networks.

IWF server **5400** connects to interface **5100**. When the user exchanges data with a terminal in a PSTN, for example, IWF server **5400** provides a digital interface for transmission toward mobile telephone **1100** and a modem interface for transmission toward the PSTN. IWF server **5400** preferably handles conversions to or from transmission control protocol (TCP) and Internet protocol (IP). IWF server **5500** operates similar to IWF server **5400**. IWF server **5500**, however, connects to interface **5100** through TRAU **5200** and processes mainly voice data.

Voice mail server **5600** processes and stores voice messages for the user. When a caller leaves a voice message, voice mail server **5600** stores the message at a location corresponding to the user and informs SMS server **5300** of the pending message. Voice mail server **5600** also notifies SMS server **5300** of the identity and telephone number of the caller which voice mail server **5600** obtains from the caller's telephone signal or from a local database. Voice mail server **5600** might make this notification via a direct connection to SMS server **5300** (not shown), or might alternatively, make the notification via a modem connection.

In response to the notification from voice mail server **5600**, SMS server **5300** formulates an SMS voice mail notification message to notify the user of the voice mail message. The voice mail notification message might include the caller's name and telephone number, a time and date stamp, and the name and address of voice mail server **5600**.

Fax mail server **5700** processes and stores fax mail messages for the user. When a caller sends a fax, or fax mail message, to network services provider **1200** for the user, fax mail server **5700** stores the fax at a location corresponding to the user and again informs SMS server **5300** of the pending message and the identity and telephone number of the caller. SMS server **5300** formulates an SMS fax notification message to notify the user of the fax. The fax notification message might include the sender's name and telephone and/or fax number, a time and date stamp, and the name and address of fax mail server **5700**.

8

Similarly, e-mail server **5800** processes and stores e-mail messages, and informs SMS server **5300** of the pending message and the identity of the caller. SMS server **5300**, in turn, notifies the user of the pending message via an SMS e-mail notification message. The SMS notification message might include the sender's name, telephone number, and e-mail address, a time and date stamp, and the name and address of e-mail server **5800**. Backup **5900** serves as a backup memory device that stores pending messages in the event of a failure in one of the servers.

II. System Processing

Mobile telephone **1100** provides a graphical user interface on display **2400** (FIG. 2) to facilitate management of the messages by the user. FIG. 6 is an example of an idle screen of display **2400** including various graphical icons and information, such as integrated message center **6100** and business card **6200**.

Business card **6200** contains information regarding individuals or businesses the user may desire to call. In the case of an individual, business card **6200** includes the individual's name and address, the individual's home, business, and/or cellular telephone numbers, and location icons. The location icons indicate graphically the characteristics representing the location or type of telephone number. In other words, a home icon indicates that the corresponding telephone number is the individual's home telephone number.

Message center **6100** represents a unified mailbox through which the user is presented with SMS notification messages for all types of received messages, including voice, text, ink, fax, e-mail, etc. To access message center **6100**, the user selects the message center icon, for example, simply by pressing it. Once the user selects the message center icon, message center **6100** displays a list of received messages. FIGS. 7A and 7B are examples of typical message center displays.

FIG. 7A is an example display in which message center **6100** presents the user with an indication of the total number of messages received **7100** and sent **7200**, and a scrollable, selectable list **7300** of notification headers for all the received messages. Each entry in the scrollable list of notification headers identifies a received message and includes the sender's name **7400** and an identification icon **7500**, identifying the type of message. The identification icons include, for example, icons used to identify voice mail, SMS messages, e-mail, and faxes.

Message center **6100** organizes the messages according to user preference. For example, the messages might be arranged alphabetically, chronologically, by message type, or by sender. In addition, the user might specify that each message include a date/time stamp to indicate when the message was received.

If the user desires, message center **6100** will provide more detailed information about any of the received messages before retrieving the actual message. To view the detailed information, the user selects a message from the scrollable list and message center **6100** displays the detailed information corresponding to the selected message. The detailed information might include the sender's home, office, and/or cellular telephone number, a location icon indicating from where the sender sent the message, the sender's e-mail address, the date and time the message was received, etc. Message center **6100** obtains the detailed information from the notification message received from network services provider **1200** or from the directories stored in memory **3400** (FIG. 3).

Once the user reads or listens to a message, message center **6100** marks the message as read/heard. Message

US 6,333,973 B1

9

center **6100** indicates read/unread, or heard/unheard, status of the messages by using a discernable mark to indicate that the corresponding message has been read or heard. In FIG. 7B, message center **6100** uses a check mark **7600** to indicate that a message has been read or heard.

FIGS. 8A, 8B, 9A, and 9B are examples of screen displays in which the user selects to read an SMS message from a caller using mobile telephone **1400** (FIG. 1). Mobile telephone **1100** stores all received SMS messages in its memory. The SMS messages may be notification messages or the actual messages.

The SMS message could be of several different data types. FIG. 8A is an example of a screen display for a standard SMS text message. The caller enters the text message directly into mobile telephone **1400** using the mobile telephone's keypad or an on-screen keyboard.

FIG. 8B is an example of a screen display for an electronic ink message. The caller enters the ink message by writing directly on mobile telephone **1400**'s display. Mobile telephone **1400** bit maps the ink message and converts it into SMS characters for transmission to GSM switching fabric **1800**.

FIGS. 9A and 9B are examples of screen displays for SMS text messages with hypertext markup language (HTML) code. The HTML code permits the caller to insert selection buttons or hot-links into the text message. FIG. 9A is an example of a screen display for a text message that includes two selection buttons. To respond to the text message, the user can simply press the "Yes" or "No" button. FIG. 9B is an example of screen display of a text message that includes a hot-link. By pressing the "TravelNorth" hot-link, mobile telephone **1100** establishes a telephone connection to the TravelNorth company or accesses their web page.

FIG. 10 is an example of a screen display in which the user selects to listen to a voice mail message from a caller using telephone **1300** (FIG. 1). Message center **6100** provides a graphical depiction of the SMS voice mail notification message that mobile telephone **1100** received from network services provider **1200**. At this point, however, voice mail server **5600** in network services provider **1200** continues to store the actual voice mail message.

Message center **6100** provides all of the conventional voice mail services in graphical form. Some of the voice mail features provided by message center **6100** might include play, skip back, skip ahead, go to previous message, go to next message, call sender, reply to sender, reply to all, delete the message, set external and/or internal greetings, and change password. Message center **6100** additionally provides features for viewing the voice mail notification message and composing, recording, and sending a text message.

When the user wants to listen to the voice mail message after viewing the voice mail notification message, the user selects the voice mail icon corresponding to the voice message from the message center display (FIGS. 7A and 7B). In response, mobile telephone **1100** establishes a connection with network services provider **1200** over the voice B-channel.

The user interacts with voice mail server **5600** using the graphical controls shown in FIG. 10. When the user presses one of the graphical controls, mobile telephone **1100** translates the user's action into corresponding DTMF tones to control voice mail server **5600**. For example, when the user presses the "Play" button, mobile telephone **1100** generates a DTMF tone identical to pressing the "2" key on a tele-

10

phone. Voice mail server **5600** interprets this DTWF tone as an instruction to play back the voice message.

FIG. 11 is an example of a screen display in which the user wants to retrieve a fax, or fax mail message, from a caller using facsimile equipment **1500** (FIG. 1). Message center **6100** provides a graphical depiction of the SMS fax notification message that mobile telephone **1100** received from network services provider **1200**. At this point, however, fax mail server **5700** in network services provider **1200** continues to store the actual contents of the fax.

Message center **6100** permits the user to view the fax notification message, select and view the contents or a portion of the contents of the fax, forward the fax to facsimile equipment, a printer, or a computer, delete the fax, and change the password to fax mail server **5700**. FIG. 11 shows that message center **6100** provides the user with graphical controls corresponding to these features.

When the user wants to retrieve the fax after viewing the fax notification message, the user first selects the fax icon corresponding to the fax from the message center display (FIGS. 7A and 7B), and then instructs mobile telephone **1100** to retrieve the fax by pressing the "View" button. In response, mobile telephone **1100** establishes a B-channel connection with network services provider **1200** to download the fax from fax mail server **5700**. Display **2400** only displays a portion of the downloaded fax at a time due to display **2400**'s limited size. Mobile telephone **1100** provides on-screen graphical scroll keys, or hard keys on main housing **2100**, to allow the user to scroll horizontally and vertically to view the entire fax.

When the user wants to forward the fax after viewing the fax notification message, the user first selects the fax icon from the message center display, and then presses the graphical button corresponding to the destination location. In response, mobile telephone **1100** establishes a connection with network services provider **1200** and informs fax mail server **5700** where to forward the fax.

FIG. 12 is an example of a screen display in which the user wants to retrieve e-mail from a caller using computer **1600** (FIG. 1). Message center **6100** provides a graphical depiction of the SMS e-mail notification message that mobile telephone **1100** received from network services provider **1200**. At this point, however, e-mail server **5800** in network services provider **1200** continues to store the actual e-mail message. Message center **6100** permits the user to view the e-mail notification message and download the e-mail message from e-mail server **5800**.

When the user wants to retrieve the e-mail message after viewing the e-mail notification message, the user first selects the e-mail icon corresponding to the e-mail message from the message center display (FIGS. 7A and 7B), and then instructs mobile telephone **1100** to retrieve the e-mail message by pressing the "View" button. In response, mobile telephone **1100** establishes a connection with network services provider **1200** to download the e-mail message from e-mail server **5800**.

Unlike in the case of fax retrieval, e-mail server **5800** reformats the e-mail message for viewing on display **2400**. The user scrolls vertically through the e-mail message using on-screen scroll keys or hard keys on main housing **2100**.

Message center **6100** allows the user to respond to any type of message by either sending an SMS message or by establishing a voice call to the message sender. FIGS. 13A through 13D, 14A, and 14B are example displays showing the two types of responses.

FIGS. 13A though 13D are example displays in which the user responds to an ink message from a message sender by

sending an SMS message. FIG. 13A is an example display showing the ink message received from the message sender. In FIG. 13B, the user selects a toolbox menu by pressing the "Tools" button on display 2400. The toolbox menu provides the user with several writing tools: Clear, Type, Erase, and Write. Clear clears the original message from display 2400, Type enables the user to generate a text message using an on-screen keyboard or hard keys, Erase allows the user to erase a portion of the original message from display 2400, and Write enables the user to write an ink message.

FIG. 13C is an example display of the case in which the user selects Write from the toolbox menu. The user annotates the existing ink message with an ink response and sends it to the message sender by pressing the "Send" button. FIG. 13D is an example display showing that once mobile telephone 1100 sends the response, message center 6100 prompts the user whether the response should be saved. The user can save the response by pressing the "Yes" button.

FIGS. 14A and 14B are example displays in which the user responds to the ink message by establishing a voice call to the message sender. FIG. 14A is an example display showing the ink message received from the message sender. To respond to the ink message by calling the message sender, the user presses the "Talk" button on display 2400. FIG. 14B is an example display showing that mobile telephone 1100 automatically dials the message sender in response to selection by the user. Mobile telephone 1100 obtains the message sender's telephone number from the SMS notification message or from the directories stored in memory 3400 (FIG. 3).

Whenever mobile telephone 1100 receives a voice call or an SMS message, message center 6100 presents information regarding the call to the user. Message center 6100 provides sufficient information about the call to permit the user to decide whether to accept the call or send it to the message center for later retrieval. The information presented by message center 6100 might include the type of call, the caller's name, the caller's telephone number, and preferably the location from which the caller placed the call.

FIGS. 15A and 15B are example displays in which the user receives a voice call and an SMS message, respectively. FIG. 15A is an example display in which the user presses the "Accept" button to accept the voice call. At this time, the user may speak to the caller. If the user decides, on the other hand, to send the voice call to the message center, the user either presses the "MsgCtr" button or simply does not respond to the voice call for a predetermined period of time. Under either circumstance, the voice call forwards to voice mail server 5600 in network services provider 1200 by conventional mechanisms.

FIG. 15B is an example display in which the user presses the "Read" button to read the SMS message. Message center 6100 displays the SMS message on display 2400 in response. If the user decides, on the other hand, to send the SMS message to the message center, the user either presses the "MsgCtr" button or simply does not respond to the SMS message for a predetermined period of time. Under either circumstance, the SMS message forwards to SMS server 5300 in network services provider 1200 by conventional mechanisms.

Message center 6100 offers many call and message handling features to the user. For example, message center 6100 offers various call forwarding and call filtering features to handle specific calls or specific types of calls in a special manner.

III. Conclusion

The integrated message center according to the principles of the present invention provides an integrated display of different types of messages that can be easily manipulated by a user.

The foregoing description of preferred embodiments of the present invention provides illustration and description, but is not intended to be exhaustive or to limit the invention to the precise form disclosed. Modifications and variations are possible in light of the above teachings or may be acquired from practice of the invention. For example, the servers have been described as being located at a single location, namely, the network services provider. However, this need not be the case. The servers could be physically positioned at locations remote from each other, and communicate with an SMS server by modem, for example, to provide the SMS message notification capability.

Additionally, the user has been described as accessing the integrated message center using a mobile telephone. The user could, alternatively, access the integrated message center using other mechanisms, such as a desktop-type unit or a personal computer.

Moreover, the foregoing description detailed specific message center displays, containing various graphical icons and buttons. These displays have been provided as examples only. The foregoing description encompasses obvious modifications to the described message center displays. The scope of the invention is defined by the claims and their equivalents.

What is claimed is:

1. An integrated message center within telecommunications equipment for consolidating messages of different types for viewing and manipulation by a user of the telecommunications equipment having a display and a processor, comprising:

means for automatically receiving notification messages corresponding to pending messages of different types, the notification messages including information regarding the source of each of the pending messages and the type of each of the pending messages, wherein each of the notification messages is automatically sent to the user when one of the pending messages is initially received and wherein the notification messages are received from an interface with independent connections with different bandwidths for the different types of pending messages;

means for determining a message type of the pending messages from the information corresponding to the received notification messages;

means for associating a message type indicator with each of the received notification messages based on the determined message type;

means for displaying on the display a portion of the received notification messages and the associated message type indicators as entries in a single selectable list;

means for receiving a selection of one of the pending messages based on the entries in the single selectable list; and

means for retrieving manipulating the selected pending message for viewing and manipulation by the user.

2. The integrated message center of claim 1, further including

means for displaying on the display detailed information about a sender of the selected pending message upon direction from the user.

US 6,333,973 B1

13

3. The integrated message center of claim 2, wherein the means for displaying detailed sender information includes means for displaying at least one of sender home telephone number data, sender business telephone number data, sender cellular telephone number data, sender e-mail address data, and sender fax number data.

4. The integrated message center of claim 1, wherein the message type indicator is a graphical icon, and wherein the displaying means includes

means for displaying one of the portions of the received notification messages and the associated graphical icon as a single entry in the single selectable list.

5. The integrated message center of claim 4, wherein each of the notification message portions includes an identification of a sender of the corresponding pending message, and wherein the displaying means includes

means for displaying a sender identification and the associated graphical icon as a single entry in the single selectable list.

6. The integrated message center of claim 1, wherein each of the notification message portions includes an identification of a sender of the corresponding pending message, and wherein the displaying means includes

means for displaying a sender identification and the associated message type indicator as a single entry in the single selectable list.

7. The integrated message center of claim 1, wherein the retrieving means includes

means for accessing an external mail server, and

means for retrieving the selected pending message from the external mail server.

8. A method for consolidating messages of different types for viewing and manipulation by a user of telecommunications equipment having display and a processor, comprising the steps, executed by the telecommunications equipment, of:

automatically receiving notification messages corresponding to pending messages of different types, the notification messages including information regarding the source of each of the pending messages and the type of each of the pending messages, wherein each of the notification messages is automatically sent to the user when one of the pending messages is initially received and wherein the notification messages are received from an interface with independent connections with different bandwidths for the different types of pending messages;

determining a message type of the pending messages from the information corresponding to the received notification messages;

associating a message type indicator with each of the received notification messages based on the determined message type;

displaying on the display portions of the received notification messages and the associated message type indicators as entries in a single selectable list;

receiving a selection of one of the pending messages from the entries in the single selectable list; and

retrieving the selected pending message for viewing and manipulation by the user.

9. The method of claim 8, wherein the message type indicator is a graphical icon, and wherein the displaying step includes the substep of

displaying one of the portions of the received notification messages and the associated graphical icon as a single entry in the single selectable list.

14

10. The method of claim 9, wherein each of the notification message portions includes an identification of a sender of the corresponding pending message, and wherein the displaying step includes the substep of

displaying a sender identification and the associated graphical icon as a single entry in the single selectable list.

11. The method of claim 8, wherein each of the notification message portions includes an identification of a sender of the corresponding pending message, and wherein the displaying step includes the substep of

displaying a sender identification and the associated message type indicator as a single entry in the single selectable list.

12. The method of claim 8, further comprising the step of displaying detailed information about a sender of the selected pending message upon direction from the user.

13. The method of claim 8, wherein the retrieving step includes the substeps of

accessing an external mail server, and

retrieving the selected pending message from the external mail server.

14. A network services provider for notifying a user of received messages, comprising:

a plurality of mail servers for receiving messages of different types from a plurality of message senders over a communications network, the mail servers store the received messages and generate notification signals in response to receipt of new messages;

a short message generator for receiving the notification signals from the mail servers, generating notification messages from the notification signals, and automatically transmitting the notification messages to the user, each of the notification messages including information regarding the message sender and a message type of the received message, wherein the notification messages provide the user with a single selectable list; and

an interface for processing with independent connections with different bandwidths for the different types of received messages.

15. The network services provider of claim 14, wherein one of the mail servers includes

a voice mail server for processing voice mail,

a fax mail server for processing faxes, and

an e-mail server for processing e-mail.

16. The network services provider of claim 14, wherein at least one of the mail servers includes

a remote mail server remotely located from the short message generator, the remote mail server communicating the notification signals to the short message generator via modem.

17. The network services provider of claim 14, wherein the short message generator includes

a Short Message Service (SMS) server configured to generate SMS notification messages from the notification signals from the mail servers.

18. The network services provider of claim 14, further comprising

an interworking function server connected to the mail servers and configured to perform data conversions on the messages received by the mail servers.

19. The network services provider of claim 14, further comprising

a terminal rate adapter unit connected to one of the mail servers and configured to perform encoding and decoding on the messages received by the one mail server.

US 6,333,973 B1

15

20. The network services provider of claim 14, wherein the short message generator includes

means for relaying notes received from the communications network to the user.

21. User equipment for notifying a user of pending messages, comprising:

- a display screen;
- an input device;
- a receiver for automatically receiving voice calls and notification messages corresponding to pending messages of different types, each of the notification messages indicating an identity of a sender and message type of the corresponding pending message, wherein the notification messages are received from an interface with independent connections with different bandwidths for different types of pending messages;
- memory; and
- a processor including

means for associating a message type indicator with each of the received notification messages based on the message type of the corresponding pending message,

means for displaying on the display screen an identification of the sender and the associated message type indicator for each of the received notification messages as entries in a single selectable list to allow the user to select one of the pending messages from the single selectable list for viewing, and

means for directing the display screen to display detailed information about the sender of the selected pending message in response to selection by the user.

22. The user equipment of claim 21, wherein the processor further includes

- means for retrieving the selected pending message for viewing and manipulation by the user.

23. The user equipment of claim 22, wherein the retrieving means includes

- means for accessing an external mail server, and
- means for retrieving the selected pending message from the external mail server.

24. The user equipment of claim 21, wherein the message type indicator is a graphical icon, and wherein the displaying means includes

- means for displaying each of the sender identification and the associated graphical icons as separate entries in the single selectable list.

25. The user equipment of claim 21, wherein the directing means includes

- means for displaying the detailed sender information for the selected pending message only upon direction from the user.

26. The user equipment of claim 21, wherein the means for displaying the detailed sender information includes

- means for directing the display screen to display at least one of sender home telephone number data, sender business telephone number data, sender cellular telephone number data, sender e-mail address data, and sender fax number data.

27. A communications network comprising:

- a network services provider, connected to a switching network, for notifying a user of pending messages, the network services provider comprising
- a mail server for receiving pending messages of different types from a plurality of message senders over the switching network, the mail server stores the

16

pending messages and generates notification signals in response to receipt of new pending messages,

- a short message generator for receiving the notification signals from the mail server, generating notification messages from the notification signals, and automatically transmitting the notification messages to the switching network, the notification messages including information regarding the message sender and a message type of a corresponding pending message;
- an interface with independent connections with different bandwidths for the different types of received messages; and

user equipment, connected to the switching network, for informing the user of the pending messages received by the mail server, the user equipment comprising

means for receiving the notification messages from the short message generator and the interface,

- means for associating a message type indicator with each of the received notification messages based on the message type of the corresponding pending message,
- means for displaying portions of the received notification messages and the associated message type indicators as entries in a single selectable list,
- means for selecting one of the pending messages for viewing based on the entries in the single selectable list, and
- means for retrieving the selected pending message from the mail server for viewing and manipulation by the user.

28. The communications network of claim 27, wherein the user equipment further includes

- means for displaying detailed information about the message sender of the selected pending message upon direction of the user.

29. The communications network of claim 27, wherein the switching network includes a GSM network.

30. The communications network of claim 27, wherein the mail server includes

- a plurality of mail servers each for processing different types of the received pending messages.

31. The communications network of claim 30, wherein one of the mail servers includes

- a voice mail server for processing voice mail,
- a fax mail server for processing faxes, and
- an e-mail server for processing e-mail.

32. The communications network of claim 27, wherein the user equipment includes a mobile telephone.

33. A method for notifying a user of messages received at network equipment comprising:

- receiving messages of different types from a plurality of message senders over a communication network;
- generating notification messages based on the received messages, each of the notification messages including information regarding the message sender and a message type of the received message, wherein the notification messages are received from an interface with independent connections with different bandwidths for the different types of the plurality of message senders; and

automatically transmitting notification messages to the user, wherein the notification messages provide the user with a single selectable list.

* * * * *