

EXHIBIT 2



US005611322A

United States Patent [19]

[11] Patent Number: **5,611,322**

Matsuzaki et al.

[45] Date of Patent: ***Mar. 18, 1997**

- [54] **DISC DISCHARGING TOY**
- [75] Inventors: **Tatsuya Matsuzaki; Hisashi Ishida,**
both of Tokyo, Japan
- [73] Assignee: **Toybox Corporation,** Tokyo, Japan
- [*] Notice: The term of this patent shall not extend
beyond the expiration date of Pat. No.
5,471,967.
- [21] Appl. No.: **565,651**
- [22] Filed: **Nov. 29, 1995**

3,304,928	2/1967	Darrell	124/6 X
3,363,899	1/1968	Gross	273/425 X
3,487,824	1/1970	Profitt	273/425 X
3,548,801	12/1970	Lohr et al.	
3,717,136	2/1973	Gay et al.	124/47 X
4,463,745	8/1984	Acker	124/6
4,672,942	6/1987	Steward	124/78 X
4,747,390	5/1988	Storm	124/6
4,910,646	3/1990	Kim	362/112
5,050,575	9/1991	Killion	124/8
5,166,457	11/1992	Lorenzetti	124/49 X
5,281,182	1/1994	Yoneda et al.	446/289
5,396,876	3/1995	Liscio et al.	124/6
5,415,151	5/1995	Fusi et al.	124/1 X
5,471,967	12/1995	Matsuzaki et al.	124/6

Related U.S. Application Data

[63] Continuation of Ser. No. 342,022, Nov. 16, 1994, Pat. No. 5,471,967.

Foreign Application Priority Data

Mar. 18, 1994 [JP] Japan 6-3770

- [51] Int. Cl.⁶ **F41B 4/00**
- [52] U.S. Cl. **124/6; 124/47; 124/51.1;**
124/78; 124/82
- [58] Field of Search 124/4, 6, 16, 32,
124/42, 43, 46, 47, 51.1, 78, 82, 1, 8, 49;
273/425

References Cited

U.S. PATENT DOCUMENTS

3,191,588 6/1965 Thew 124/42 X

FOREIGN PATENT DOCUMENTS

1221593 5/1987 Canada 124/78

Primary Examiner—John A. Ricci
Attorney, Agent, or Firm—Morgan & Finnegan

ABSTRACT

[57] A disc discharging toy for discharging discs is provided which comprises a plurality of resilient discs, a magazine for holding the discs in a stacked position, a forcibly feeding device for forcibly feeding the discs so held in the supply portion piece by piece toward a discharging position, and a discharging device for discharging the disc so fed. The discharging device includes two rollers and a motor for rotating at least one of the two rollers in a direction in which the disc is discharged.

11 Claims, 6 Drawing Sheets

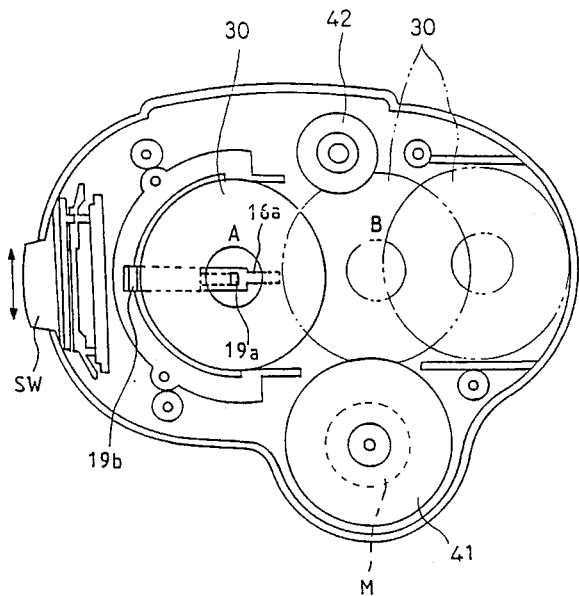
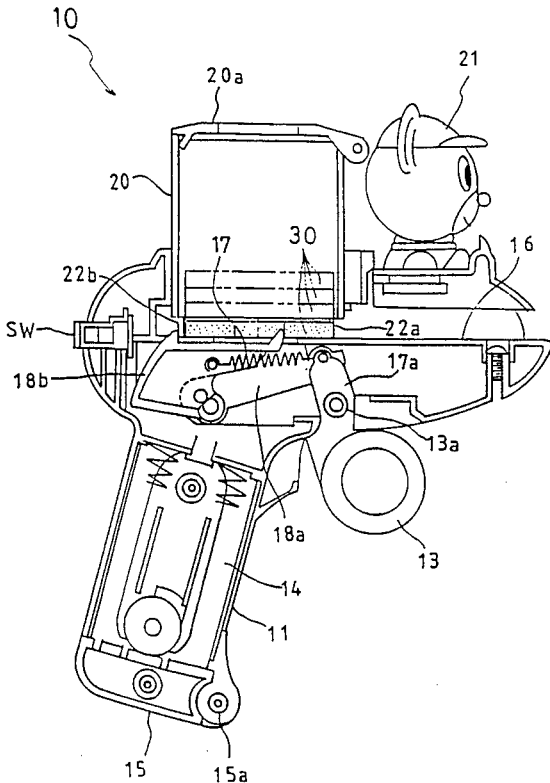


FIG. 1

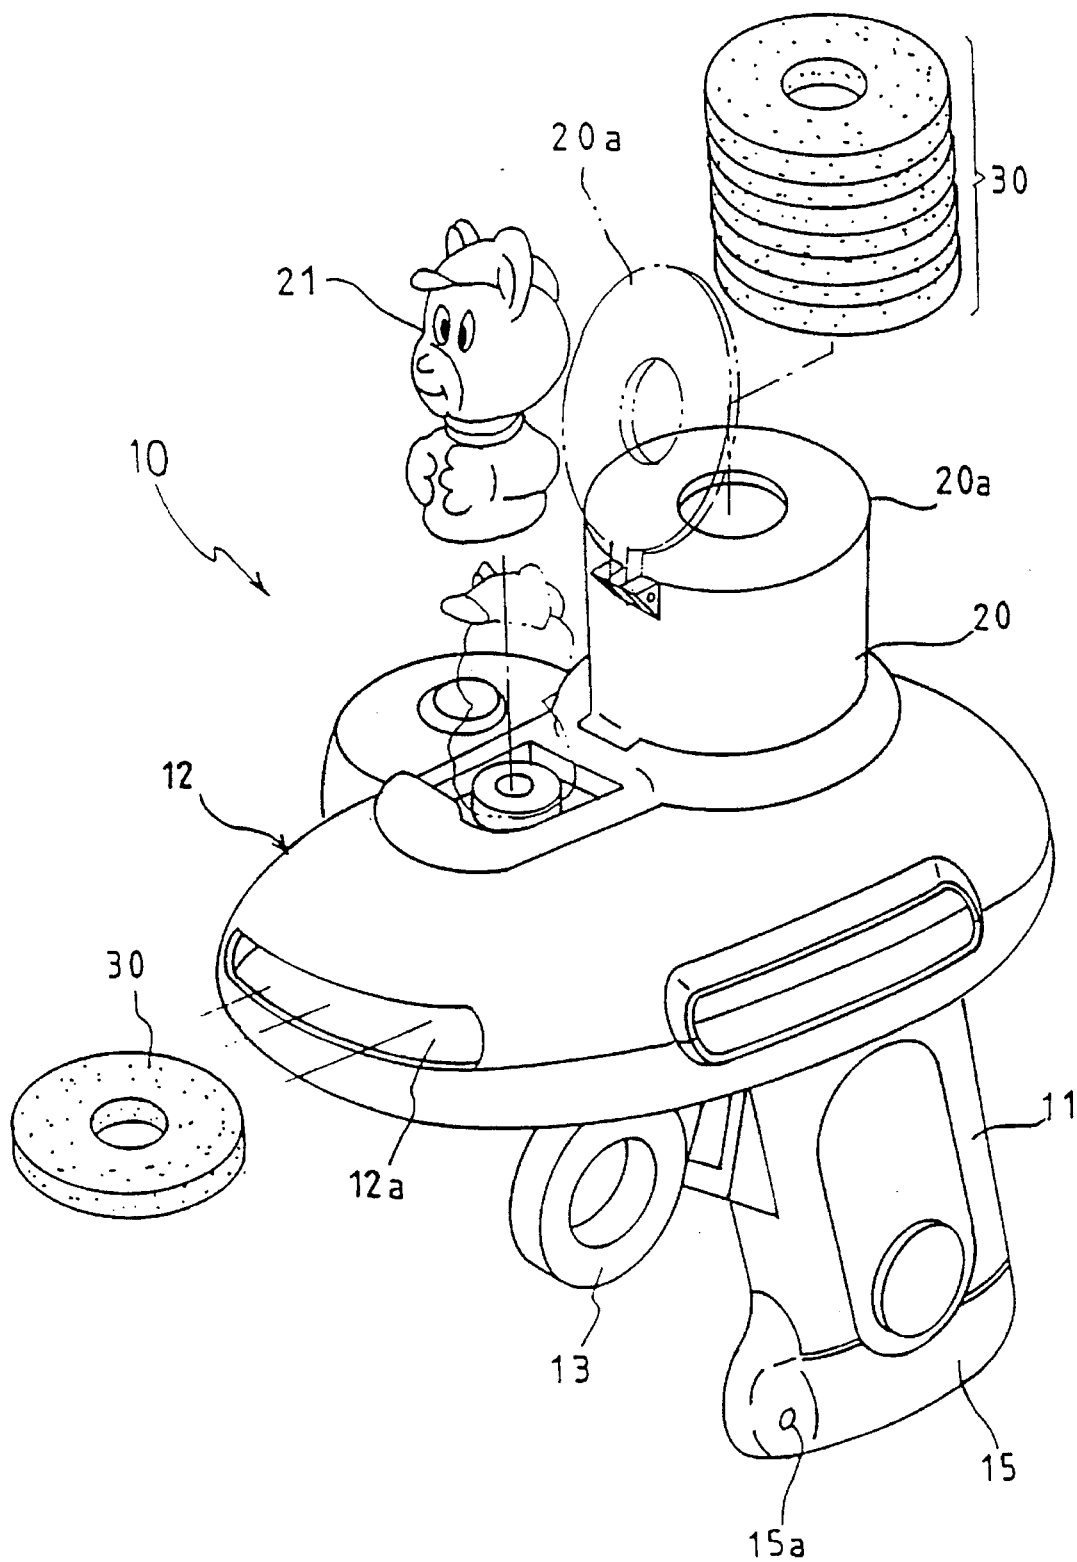


FIG. 2

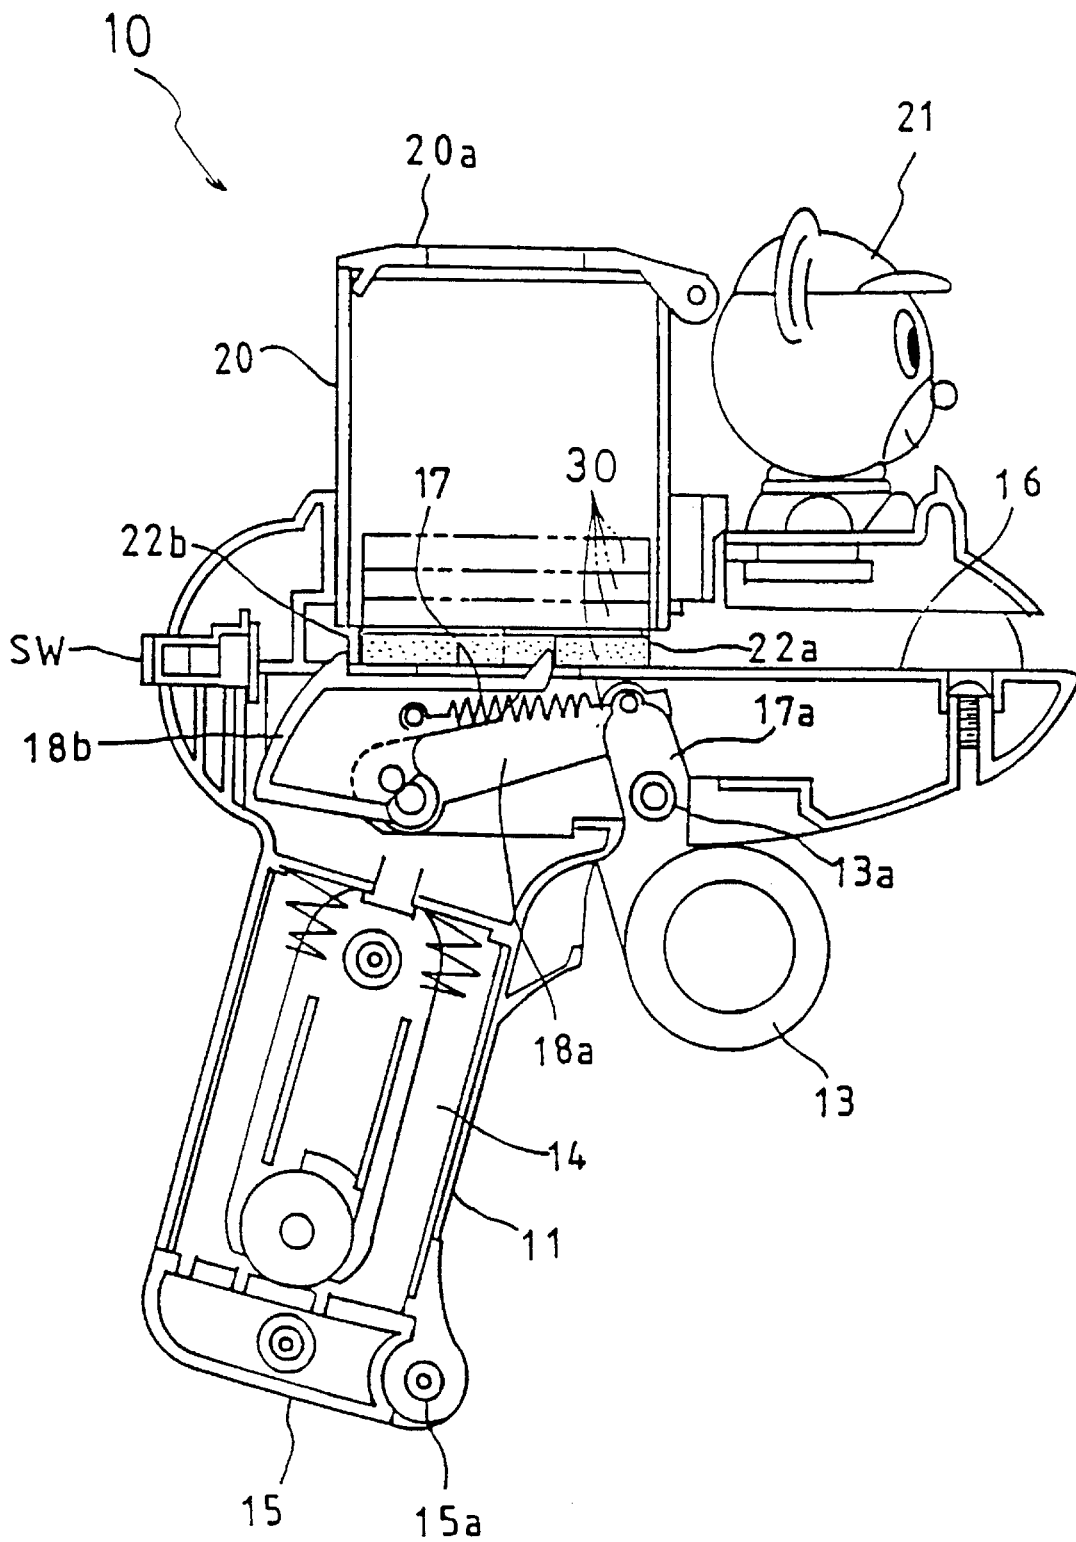


FIG. 3

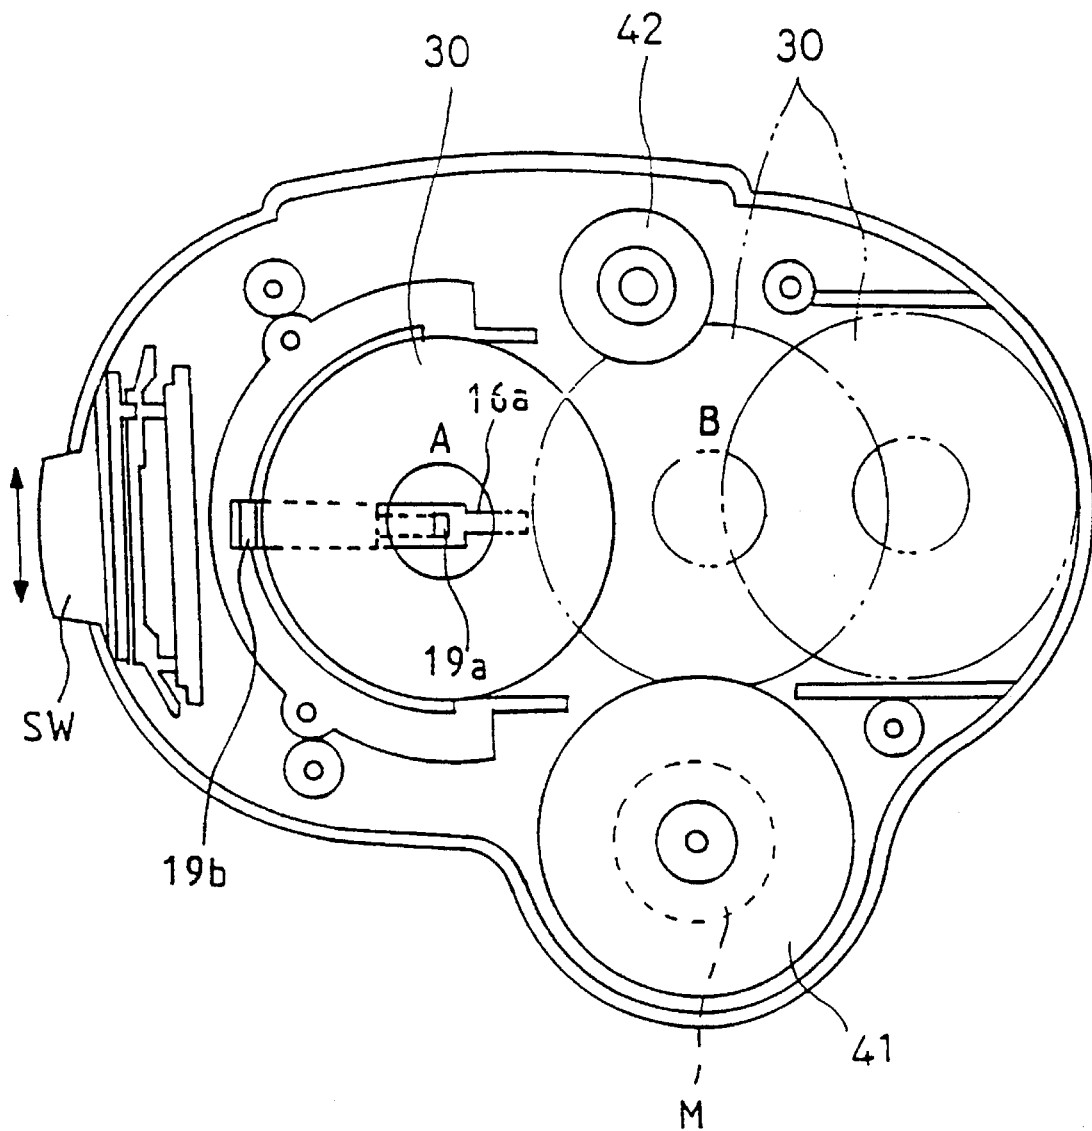


FIG. 4

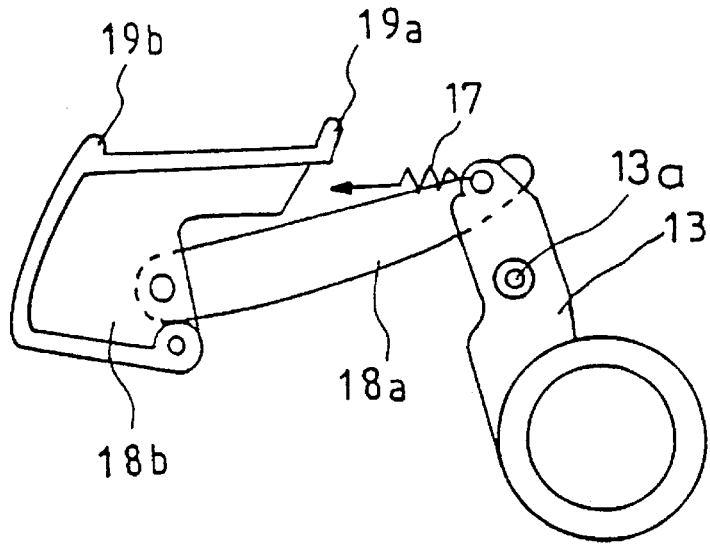


FIG. 5

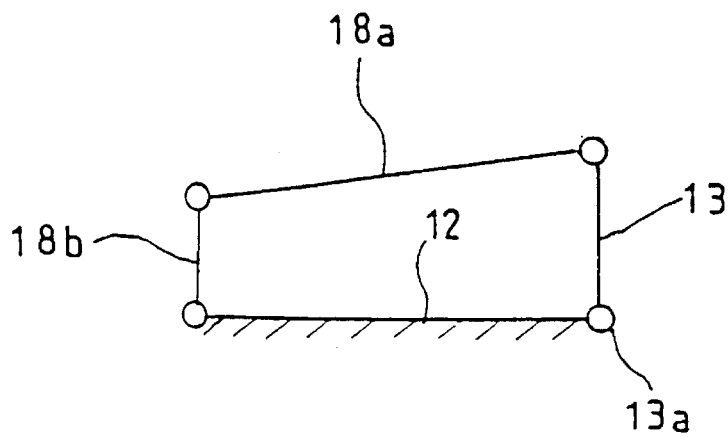


FIG. 6
(PRIOR ART)

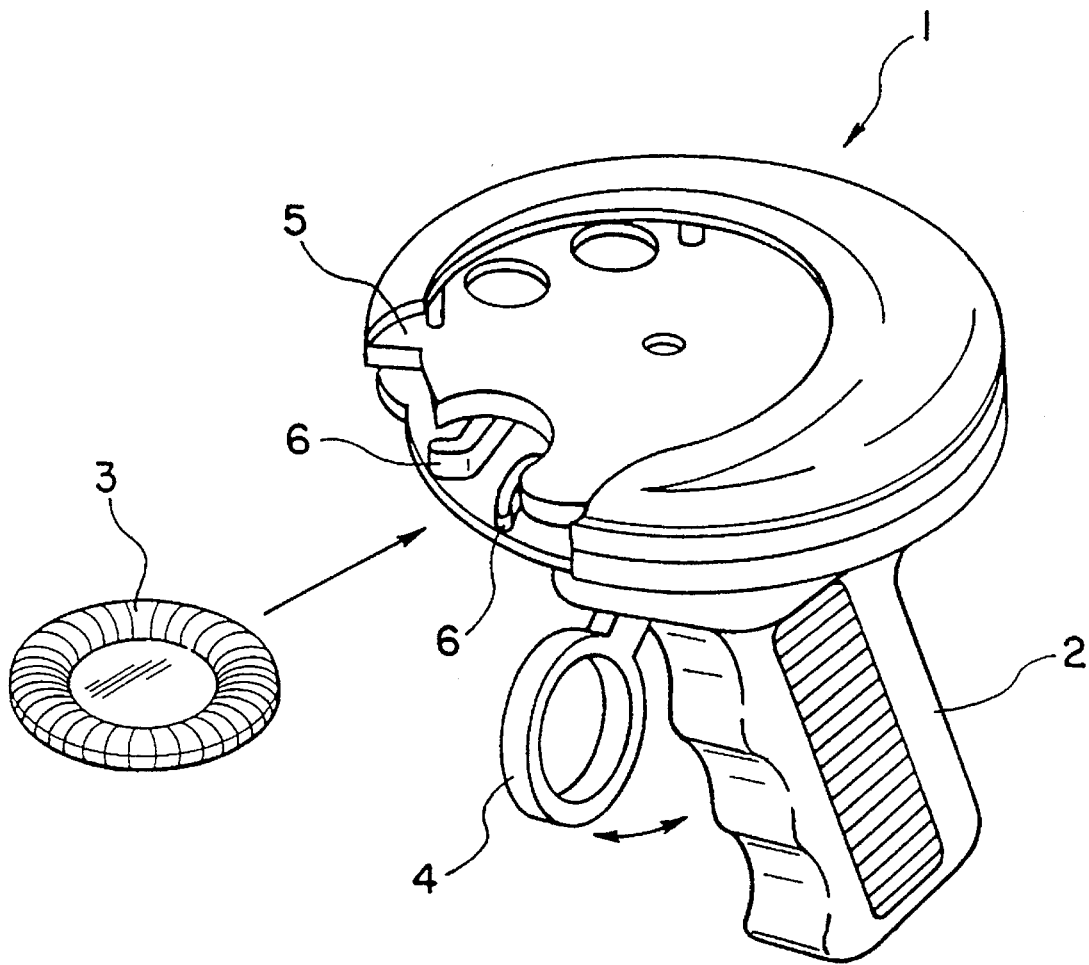


FIG. 7
(PRIOR ART)


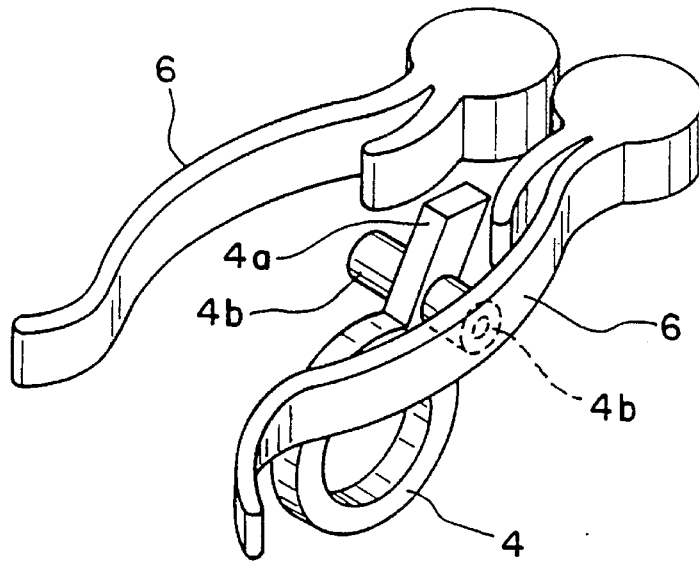


FIG. 8
(PRIOR ART)

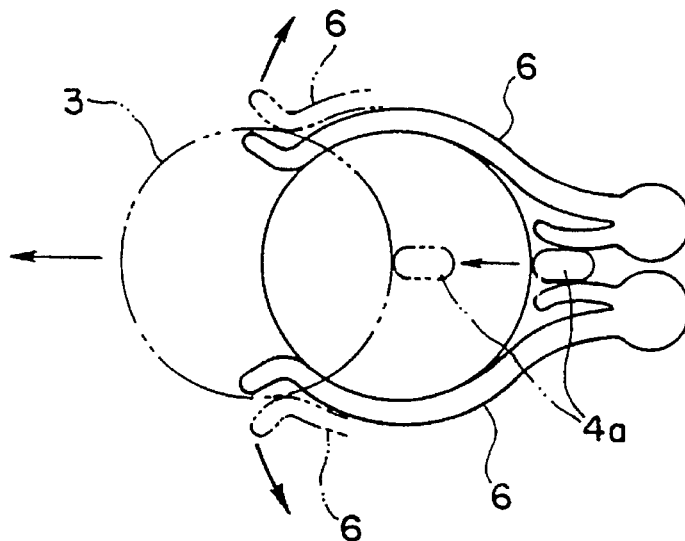

DISC DISCHARGING TOY

This is a continuation of application Ser. No. 08/342,022 filed Nov. 16, 1994, now U.S. Pat. No. 5,471,967.

FIELD OF THE INVENTION

The present invention relates generally to toys and amusement devices, and, more specifically, to a toy for discharging discs.

A known disc discharging toy of this type is illustrated in FIG. 6, wherein a disc discharging toy 1 is configured such that it has the general appearance of a pistol. A disc 3 is loaded thereunto from the front with one hand, while the other hand holds a grip 2. A muzzle is directed to a direction in which the disc is to be discharged, and then a trigger 4 is pulled for discharging the disc 3.

In this type of disc discharging toy 1, as shown in FIG. 7, a pair of resilient arms 6, 6 are provided in a barrel portion 5 of the toy 1. The disc 3 is designed to be fitted from the front in between the pair of resilient arms 6, 6 in such a manner as to expand them.

When fully fitted in place, the disc 3 is adapted to be engaged and held in place by the resilient arms 6, 6, as seen in FIG. 8. At this moment, a pressing member 4a integrally formed on the trigger 4 is pressed by the disc 3. This causes the trigger 4 to rotate (in the clockwise direction of FIG. 7) about a shaft 4b so as to move away from the grip 2.

To discharge the disc 3, the trigger 4 is pulled or pressed to impart counter-clockwise rotation about the shaft 4b. This causes the pressing member 4a to press the disc 3 forward. Then, the pair of resilient arms 6, 6, which are engaging the disc 3, are gradually opened. When substantially a half of the disc 3 is forced out of the leading end of the pair of resilient arms 6, 6 (as shown in broken lines in FIG. 8), then the pair of resilient arms 6, 6 try to close, and the disc 3 is then discharged by the restoring force of the arms.

The disc discharging toy of the type shown in FIGS. 6-8 has several drawbacks. Namely, with the disc discharging toy 1 mentioned above, only one disc 3 can be loaded therein. Thus, a loading operation is required every time a disc 3 is to be discharged, and this is time consuming. In addition, since the toy is such that the disc 3 is discharged by means of the pair of resilient arms 6, 6, the spring force of the pair of resilient arms 6, 6 must be of a certain strength, while the disc 3 should be formed of a hard material such as plastics. However, in loading, in order to force a hard disc 3 in between a pair of resilient arms 6, 6 having a strong spring force, a substantially strong force is required. Thus, children, particularly infants, find the loading operation very difficult.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a disc discharging toy in which a disc can easily be loaded.

This and other objects are met by providing a disc discharging toy for discharging discs which includes a plurality of resilient discs, a supply portion for holding a plurality of such discs that are layered over each other, a forcibly feeding device for forcibly feeding the discs held in the supply portion piece by piece to a discharging position, and a discharging device for discharging the discs that are forcibly fed by means of the forcibly feeding device, wherein the discharging device includes at least two rollers than can hold the disc, and a motor for rotating at least one

of the two rollers in a direction in which the discs are discharged.

Preferably, the discs have a toroidal shape, and the toy is configured into the shape of a pistol, and the forcibly feeding device is configured so as to include a trigger and a forcibly feeding member adapted to interlock with the trigger to forcibly feed the disc to the discharging position.

In accordance with the above, the discs held layered in the supply portion are forcibly fed to the discharging position piece by piece by means of the forcibly feeding device, and the discs so fed are discharged by virtue of the rotation of the roller that is rotated in a direction in which the discs are discharged. Thus, since the supply portion can hold a plurality of discs in a state in which they are layered over each other, it is not required to load a disc every time it is discharged, thereby making it possible to discharge discs continuously. In addition, since the loading of discs can be completed only by putting them into the supply portion, it is possible that even infants can easily perform the disc loading operation.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a front perspective view of a preferred embodiment of the present invention;

FIG. 2 is a side elevational view of the embodiment of FIG. 1, with portions removed to illustrate the interior;

FIG. 3 is a top view of the embodiment of FIG. 1, with portions removed to illustrate the interior;

FIG. 4 is a side elevational view of the trigger mechanism used in the embodiment of FIG. 1;

FIG. 5 is a schematic view showing direction of movement of the feeding device of the embodiment of FIG. 1;

FIG. 6 is a perspective view of a known disc discharging device;

FIG. 7 is a perspective view of the spring arms used to provide the discharging force for the device illustrated in FIG. 6; and

FIG. 8 is a top view of the spring arms illustrated in FIG. 7.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to FIG. 1, a disc discharging toy 10 is configured, as a whole, into a shape resembling a pistol. In particular, the disc discharging toy 10 includes a grip 11, a barrel portion 12, and a trigger 13 provided in the vicinity of the grip 11. In addition, a supply portion or magazine 20 is provided in such a manner as to be upstanding from a rear portion of the upper surface of the barrel portion 12. A figurine 21, such as a bear, is affixed to the barrel portion in front of the magazine 20.

The magazine 20 has a pivotally connected lid 20a. When pivoted to an open position (as shown in broken lines in FIG. 1), a plurality of discs 30 can be loaded into the magazine 20a. The discs 30 are made of a resilient material and have a hole in the middle, thus imparting a substantially toroidal shape. A typical number of discs to be loaded into the magazine would be about eight.

When a power switch SW, shown in FIGS. 2 and 3, and provided rearwardly of the barrel portion 12, is turned on and the trigger 13 is pressed, the discs 30 are discharged from a bore 12a.

As shown in FIG. 2, a battery compartment 14 is provided in the grip 11. In addition, provided at the bottom of the grip 11 is a lid 15 which can be opened and/or closed by pivoting about a shaft 15a, as shown in FIGS. 1 and 2. The lid 15 is opened when a battery or batteries (not shown) are loaded in or unloaded from the battery compartment 14.

As shown in FIG. 2, the barrel portion 12 is divided into two compartments, upper and lower, by a partition plate 16. A motor M, shown in FIG. 3, is mounted in the lower compartment, as well as a proximal portion of the trigger 13. The trigger 13 is rotatable about a shaft 13a, and is biased in a direction in which it is separated from the grip 11 by means of a spring 17 placed between the trigger and a fixed portion inside the barrel portion 12.

As shown in FIG. 4, the trigger 13 comprises a four-joint rotational chain mechanism between links 18a, 18b and the barrel portion 12. FIG. 5 schematically illustrates this type of mechanism. When the trigger 13 rotates about the shaft 13a in the clockwise direction, the link 18b is caused to rotate via the link 18a in the same direction. The link 18b functions to forcibly feed the discs 30 held in the magazine to the discharging position.

Pawls 19a, 19b provided on the upper surface thereof help facilitate this feeding action. The pawls 19a, 19b both project into the upper compartment from an opening 16a in the partition plate 16 in a state in which the trigger 13 is not pressed. Of the two pawls, the pawl 19a confronts a hole in the disc 30 held at the bottom of the discs layered over each other and functions as a stop for the lower-most disc 30. The pawl 19b is brought into contact with the rear portion of the bottom-most disc 30, and functions to forcibly feed the disc 30 to the discharging position when the trigger 13 is pressed. In other words, the forcibly feeding device is constituted by the four-joint rotational chain mechanism including the trigger 13.

As shown in FIGS. 1 and 2, the supply portion or magazine 20 comprises an open-ended cylindrical body placed on the partition plate 16 and a lid 20a for closing the upper end. The cylindrical body is constructed such as to hold a number of discs 30 in a state in which they are stacked one over the other.

A notch 22a substantially equal in width to the diameter of the disc is formed in the bottom front half portion of the magazine 20. The discs 30 held in the magazine 20 are fed to the discharging position through this notch 22a by means of the forcibly feeding device. A slit 22b is formed in the bottom rear half portion of the cylinder 22 for permitting the movement of the pawl 19b.

A discharging mechanism includes the motor M, as seen in FIG. 3, which is provided under the partition plate 16, and a driving roller 41 located on the upper side of the partition plate 16 and being rotatably driven by the motor M. An idler roller 42 is also located on the upper side of the partition plate 16 so as to hold the disc 30 between the driving roller 41 and itself.

In operation, the disc 30 located at a position of the magazine 20 (a position indicated by the letter "A" in FIG. 3) is fed to the discharging position (a position indicated by the letter "B" in FIG. 3) by means of the forcibly feeding device. The disc 30 so fed is designed to be discharged forward by virtue of the rotation of the driving roller 41.

Each disc 30 is resilient and toroidally shaped. By way of example, the discs 30 can be made of rubber, vinyl chloride, a blow-formed article or urethane foam, and polyethylene foam. In a particular embodiment, the discs are made of polyethylene foam. The discs 30 are preferably resilient so

as to avoid the risk of injury when a disc strikes a person. Also, the resiliency eases the deformation of the discs when held between the driving roller 41 and the idler roller 42. The toroidal shape is also imparted to the disc for the same reason. Furthermore, it was verified through experiments that a disc of toroidal shape is more stable in flight than a solid disc, and thus achieves an aerodynamic benefit.

With the disc discharging toy 10 configured as described above, since a plurality of discs can be held in the magazine 20 in a state in which they are stacked one over the other, a disc 30 is not required to be loaded every time it is discharged. Instead, the discs can be discharged in a continuous fashion. Moreover, since the loading of discs 30 can be effected merely by putting discs 30 into the supply portion 20, even infants can easily perform such a disc loading operation.

Although the embodiments of the present device have been described as above, the present device is not limited to what have been described, but may be modified in many ways without departing the spirit thereof.

For instance, although in the above embodiment, the disc discharging toy 10 is configured into a pistol-like shape as a whole, any other shape can, of course, be used.

Moreover, in the above embodiment, of the two rollers, one is constituted by a driving roller, and the other by an idler roller, but the two rollers may be constituted by driving rollers. In addition, it is possible to provide two or more idler rollers.

What is claimed is:

1. A disc discharging toy comprising:

a plate having an upper longitudinal surface and two opposite lateral sides, a forward portion and a rearward portion;

means for holding a plurality of discs in a vertical stack on the upper longitudinal surface at the rearward portion of the plate;

a first drive roller driven by an electric motor and being positioned on one side of the plate, the drive roller cooperating with a non-driven element to impart a discharging force to each disc; and

means for feeding a lower-most one of the discs into engagement with the first drive roller and the non-driven element, thereby discharging each disc from the forward portion of the plate.

2. A disc discharging toy according to claim 1, wherein the non-driven element comprises a second roller positioned on the opposite side of the plate.

3. A disc discharging toy according to claim 2, wherein the second roller is an idler roller.

4. A disc discharging toy according to claim 1, wherein the feeding means comprises a trigger pivotal about a first axis, a lever pivotal about a second axis, and a linkage connecting the trigger to the lever, wherein the lever abuts a rearward portion of each disc and pushes each disc forwardly upon pivotal movement of the trigger.

5. A disc discharging toy according to claim 4, wherein the lever includes a first pawl formed on the lever in a position to engage a rearward peripheral edge of the lower-most disc and urge same toward the first roller when the lever is rotated.

6. A disc discharging toy according to claim 1, wherein the holding means comprises a substantially cylindrical magazine having an open bottom.

7. A toy comprising:

a body having a forward portion, a rearward portion, and a partition plate dividing the body into upper and lower portions;

5

a magazine extending upwardly from the upper portion of the body and having an open upper end, and an open lower end positioned over the partition plate;

a plurality of resilient discs mounted substantially coaxially in a stacked relation to each other in the magazine, with a lower-most one of the discs resting on the partition plate each disc having a cylindrical peripheral surface;

means including a drive roller having a cylindrical outer surface, for discharging the discs one by one from the body; and

means for feeding the discs one by one from the magazine to the discharging means whereby the cylindrical outer surface of the drive roller engages the cylindrical outer surface of each disc to impart a rotating discharge force to each disc.

8. A toy according to claim 7, wherein the discharging means includes a drive roller mounted forward of the

6

magazine and having an axis parallel to the axes of the discs, and being rotatable by a power source, and an idler roller mounted forward of the magazine and having an axis parallel to the axis of the drive roller.

9. A toy according to claim 8, wherein the feeding means includes a trigger mechanism mounted in the lower portion of the body and being operable to move the lower-most disc forwardly to a position at which the cylindrical outer surface of the lower-most disc engages the cylindrical outer surface of the drive roller.

10. A toy according to claim 7, wherein each disc has a flat, annular shape and a central circular opening.

11. A toy according to claim 7, wherein the magazine includes a cover pivotally mounted on the open upper end and being pivotal into a closed position over the magazine.

* * * * *