

# EXHIBIT E



US006744759B1

(12) **United States Patent**  
**Sidhu et al.**

(10) **Patent No.:** **US 6,744,759 B1**  
(45) **Date of Patent:** **Jun. 1, 2004**

(54) **SYSTEM AND METHOD FOR PROVIDING USER-CONFIGURED TELEPHONE SERVICE IN A DATA NETWORK TELEPHONY SYSTEM**

(75) Inventors: **Ikhlaq S. Sidhu**, Vernon Hills, IL (US); **Guido M. Schuster**, Des Plaines, IL (US); **Frederick D. Dean**, Chicago, IL (US); **Andrew Bezaitis**, Chicago, IL (US)

(73) Assignee: **3Com Corporation**, Santa Clara, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/405,283**

(22) Filed: **Sep. 27, 1999**

(51) **Int. Cl.**<sup>7</sup> ..... **H04L 12/56**

(52) **U.S. Cl.** ..... **370/356; 370/389**

(58) **Field of Search** ..... 370/260-263, 370/352-358, 389; 709/200, 217, 218, 219, 223, 227-229

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

4,313,035 A	1/1982	Jordan et al.	
4,953,198 A	8/1990	Daly et al.	379/61
4,973,837 A	11/1990	Bradbeer	
5,297,191 A	3/1994	Gerszberg	
5,311,582 A	5/1994	Davenport et al.	
5,428,663 A	6/1995	Grimes et al.	
5,448,623 A	9/1995	Wiedeman et al.	
5,471,616 A	11/1995	Johnson et al.	
5,497,339 A	3/1996	Bernard	364/705.05

(List continued on next page.)

**FOREIGN PATENT DOCUMENTS**

DE 198 13 179 A1 9/1999

EP	0 578 374 A1	8/1993
EP	0 704 788 A2	4/1996
EP	0 858 202 A2	2/1998
EP	0 869 688 A2	10/1998
EP	0 918 423 A2	10/1998
EP	0 881 848 A2	12/1998
WO	WO95/34985	12/1995
WO	WO 97/31492	8/1997
WO	WO 97/33421	9/1997
WO	WO98/00988	1/1998
WO	WO 98/04065	1/1998
WO	WO98/10538	3/1998
WO	WO 99/45687	3/1998
WO	WO 98/16051	4/1998
WO	WO98/21911	5/1998
WO	WO 98/30008	7/1998
WO	WO 98/37665	8/1998
WO	WO 99/35802	1/1999
WO	WO 99/12365	3/1999
WO	WO 99/19988	4/1999
WO	WO 01/05078 A2	7/2000

**OTHER PUBLICATIONS**

3COM SIP Solutions 1.0 benefits brochure. (4 total pages) (2000).

(List continued on next page.)


*Primary Examiner*—Salvatore Cangialosi

(74) *Attorney, Agent, or Firm*—McDonnell Boehnen Hulbert & Berghoff LLP

(57) **ABSTRACT**

A system and method for providing user-configured telephone service to a user of a data network telephone. The user connects a data network telephone to the data network. The data network telephone registers with a telephone connection server to have basic calling service. The user accesses a service provider server to enter feature selections. The service provider server may use a web page to query the user for feature selections. The service provider server uses the user's selections to update the user's account and to activate the selected features.

**10 Claims, 14 Drawing Sheets**

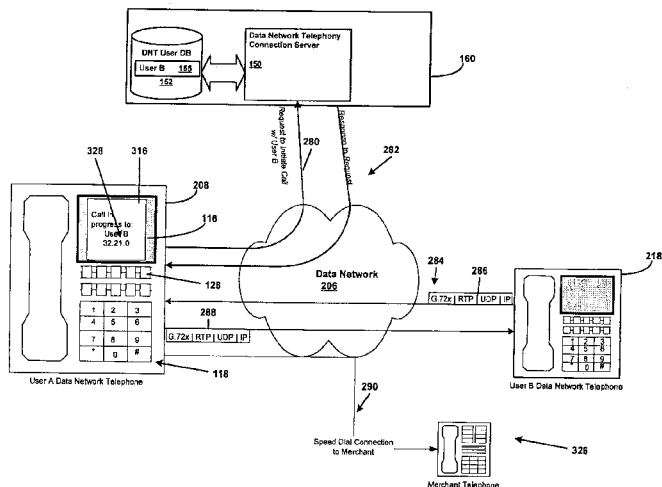

## U.S. PATENT DOCUMENTS

5,557,658	A	9/1996	Gregorek et al. ....	379/67
5,563,937	A	10/1996	Bruno et al.	
5,606,594	A	2/1997	Register et al. ....	379/58
5,646,945	A	7/1997	Bergler	
5,727,057	A	3/1998	Emery et al. ....	379/211
5,732,074	A	3/1998	Spaur et al.	
5,732,216	A	3/1998	Logan et al.	
5,742,905	A	4/1998	Pepe et al. ....	455/461
5,838,665	A	11/1998	Kahn et al. ....	370/260
5,850,433	A	12/1998	Rondeau .....	379/201
5,875,405	A	2/1999	Honda	
5,894,473	A	4/1999	Dent	
5,894,595	A	4/1999	Foladare et al. ....	455/414
5,915,008	A	6/1999	Dulman .....	379/201
5,918,172	A	6/1999	Saunders et al. ....	455/404
5,930,700	A	7/1999	Pepper et al.	
5,933,778	A	8/1999	Buhrmann et al. ....	455/461
5,938,757	A	8/1999	Bertsch	
5,960,340	A	9/1999	Fuentes	
5,970,059	A	10/1999	Ahopelto et al.	
5,991,394	A	11/1999	Dezonno et al.	
6,006,272	A	12/1999	Aravamudan et al.	
6,020,916	A	2/2000	Gerszberg et al.	
6,031,904	A	2/2000	An et al.	
6,044,403	A	3/2000	Gerszberg et al.	
6,075,992	A	6/2000	Moon et al.	
6,084,584	A	7/2000	Nahi et al.	
6,141,341	A	10/2000	Jones et al.	
6,161,134	A	12/2000	Wang et al.	
6,163,598	A	12/2000	Moore	
6,167,040	A	12/2000	Haeggstrom	
6,175,860	B1	1/2001	Gaucher	
6,188,688	B1	2/2001	Buskirk, Jr.	
6,212,261	B1	4/2001	Meubus et al.	
6,216,158	B1	4/2001	Luo et al.	
6,240,097	B1	5/2001	Wesloek et al.	
6,262,978	B1 *	7/2001	Bruno et al. ....	370/352
6,266,539	B1	7/2001	Pardo	
6,301,609	B1	10/2001	Aravamudan et al.	
6,308,201	B1	10/2001	Pivowar et al.	
6,334,126	B1	12/2001	Nagatomo et al.	
6,337,858	B1	1/2002	Petty et al. ....	370/356
6,359,892	B1	3/2002	Szlam et al.	
6,385,308	B1	5/2002	Cohen et al.	
6,404,764	B1	6/2002	Jones et al.	
6,411,615	B1 *	6/2002	DeGolia et al. ....	370/352
6,411,965	B2	6/2002	Klug	
6,414,962	B1	7/2002	Hall et al.	
6,418,198	B2	7/2002	Brablec et al.	
6,421,235	B2	7/2002	Ditzik	
6,445,697	B1	9/2002	Fenton	
6,448,978	B1	9/2002	Salvador et al.	
6,456,594	B1	9/2002	Kaplan et al.	
6,456,601	B1	9/2002	Kozdon et al.	
6,477,565	B1	11/2002	Daswani et al.	
6,477,576	B2	11/2002	Angwin et al.	
6,483,902	B1	11/2002	Stewart et al.	
6,493,338	B1	12/2002	Preston et al.	
6,496,477	B1	12/2002	Perkins et al.	
6,526,462	B1	2/2003	Elabd	
6,539,359	B1	3/2003	Ladd et al.	
2001/0022784	A1	9/2001	Menon et al.	
2001/0030950	A1	10/2001	Chen et al.	

## OTHER PUBLICATIONS

Sidhu, Ikhlq and Bezaitis, Andrew, Eat or be eaten, [www.americasnetwork.com/issues/99issues/991101/991191\\_13\\_eat.htm](http://www.americasnetwork.com/issues/99issues/991101/991191_13_eat.htm), printed May 10, 2000. (6 total pages) (Nov. 1, 1999).

Myers, Brad A.; Stiel, Herb; and Gargiulo, Robert, Collaboration Using Multiple PDAs Connected to a PC, Proceedings of the ACM 1998 conference on Computer supported cooperative work, Nov. 14–18, 1998, Seattle, WA. (total 11 pages).

Dalgic, Ismail; Borella, Michael; Dean, Rick; Grabiec, Jacek; Mahler, Jerry; Schuster, Guido, and Sidhu, Ikhlq, True Number Portability and Advanced Call Screening in a SIP-Based IP Telephony System, *IEEE Communications Magazine*, vol. 37, No. 7, Jul. 1999, pp. 96–101. (8 total pages).

Handley/Schulzrinne/Schooler/Rosenberg, SIP: Session Initiation Protocol, Network Working Group, Request for Comments (RFC) 2543, Mar. 1999. (153 pages).

Handley.Schulzrinne/Schooler/Rosenberg, SIP: Session Initiation Protocol, Internet Engineering Task Force, draft-ietf-sip-rfc2543bis-02.ps. Sep. 4, 2000. (131 pages).

Hansson, Allan et al., *Phone Doubler—A Step Towards Integrated Internet and Telephone Communities*, Ericsson Review, No. 4, 1997, pps. 142–152.

Zellweger, Polle T. et al. *An Overview of the Etherphone System and Its Applications*, Xerox Palo Alto Research Center (Mar. 1988), pps. 160–168, XP 000617541.

Terry, Douglas B. et al. *Managing Stored Voice In The Etherphone System*, Xerox Palo Alto Research Center vol. 1, (Feb. 1998, pps. 3–27, XP 000032477, 1988.

Terry, Douglas B. et al. *Managing Stored Voice In the Etherphone System*, Operating Systems Review (SIGOPS), US, ACM Head Quarter, New York, NY. vol.21, No. % (Nov. 8, 1987), pps. 103–104, XP 000005196.

U.S. patent application Ser. No. 09/515,970, Schuster et al., filed Feb. 29, 2000.

U.S. patent application Ser. No. 09/515,796, Schuster et al., filed Feb. 29, 2000.

U.S. patent application Ser. No. 09/406,151, Schuster et al., filed Sep. 27, 1999.

U.S. patent application Ser. No. 09/409,298, Schuster et al., filed Sep. 27, 1999.

U.S. patent application Ser. No. 09/406,066, Schuster et al., filed Sep. 27, 1999.

U.S. patent application Ser. No. 09/515,795, Schuster et al., filed Feb. 29, 2000.

U.S. patent application Ser. No. 09/516,269, Schuster et al., filed Feb. 29, 2000.

U.S. patent application Ser. No. 09/515,366, Schuster et al., filed Feb. 29, 2000.

U.S. patent application Ser. No. 09/470,879, Schuster et al., filed Dec. 22, 1999.

U.S. patent application Ser. No. 09/707,708, Schuster et al., filed Nov. 7, 2000.

U.S. patent application Ser. No. 09/677,077, Schuster et al., filed Sep. 29, 2000.

U.S. patent application Ser. No. 09/584,927, Schuster et al., filed May 31, 2000.

U.S. patent application Ser. No. 09/726,993, Schuster et al., filed Nov. 30, 2000.

U.S. patent application Ser. No. 09/728,833, Schuster et al., filed Nov. 30, 2000.


U.S. patent application Ser. No. 09/451,388, Schuster et al., filed Nov. 30, 1999.

U.S. patent application Ser. No. 09/406,231, Schuster et al., filed Sep. 27, 1999.

U.S. patent application Ser. No. 09/515,365, Schuster et al., filed Feb. 29, 2000.

- U.S. patent application Ser. No. 09/406,320, Schuster et al., filed Sep. 27, 1999.
- U.S. patent application Ser. No. 09/515,797, Schuster et al., filed Feb. 29, 2000.
- U.S. patent application Ser. No. 09/515,364, Schuster et al., filed Feb. 29, 2000.
- U.S. patent application Ser. No. 09/515,798, Schuster et al., filed Feb. 29, 2000.
- U.S. patent application Ser. No. 09/584,924, Schuster et al., filed May 31, 2000.
- U.S. patent application Ser. No. 09/515,969, Schuster et al., filed Feb. 29, 2000.
- U.S. patent application Ser. No. 09/406,322, Schuster et al., filed Sep. 27, 1999.
- U.S. patent application Ser. No. 09/406,152, Schuster et al., filed Sep. 27, 1999.
- U.S. patent application Ser. No. 09/405,981, Schuster et al., filed Sep. 27, 1999.
- U.S. patent application Ser. No. 09/406,128, Schuster et al., filed Sep. 27, 1999.
- U.S. patent application Ser. No. 09/515,387, Schuster et al., filed Feb. 29, 2000.
- International Search Report for PCT Application Ser. No. PCT/US00/26618, Dated Feb. 19, 2001.
- Pepper, David J. et al., *The Call Manager System: A Platform for Intelligent Telecommunications Services*, Speech Communication, vol. 23, (1997), pps. 129–139.
- Dalgic, Ismail et al., *True Number Portability and Advanced Call Screening in a SIP-Based IP Telephony System*, IEEE Communications Magazine, vol. 37, No. 7, (Jul. 1999), pps. 96–101.
- International Search Report for PCT Application Ser. No. PCT/US00/26094, Dated Jan. 31, 2001.
- International Search Report for PCT Application Ser. No. PCT/US00/26594, Dated Feb. 6, 2001.
- Watanabe, H. et al., *Development of the BTRON–BrainPad*, Proceedings 13<sup>th</sup> Tron Project International Symposium, Online?, (Dec. 4–7, 1996), pps. 95–103.
- Gessler, Stefan et al., *PDA's as Mobile WWW Browsers*, Computer Networks and ISDN Systems, vol. 28, No. 1, (Dec. 1995), pps. 53–59.
- International Search Report for PCT Application Ser. No. PCT/US00/26650, Dated Feb. 19, 2001.
- International Search Report for PCT Application Ser. No. PCT/US00/41020, Dated Feb. 21, 2001.
- Anquetil, L.P. et al., *Media Gateway Control Protocol and Voice Over IP Gateways, MGCP and VoIP Gateways Will Offer Seamless Interworking of New VoIP Networks with Today's Telephone Networks*, Electrical Communication, (Apr. 1, 1999), pps. 151–157.
- International Search Report for PCT Application Ser. No. PCT/US00/26649, Dated Feb. 6, 2001.
- “Understanding Packet Voice Protocols”; The International Engineering Consortium; <http://www.iec.org>.

\* cited by examiner

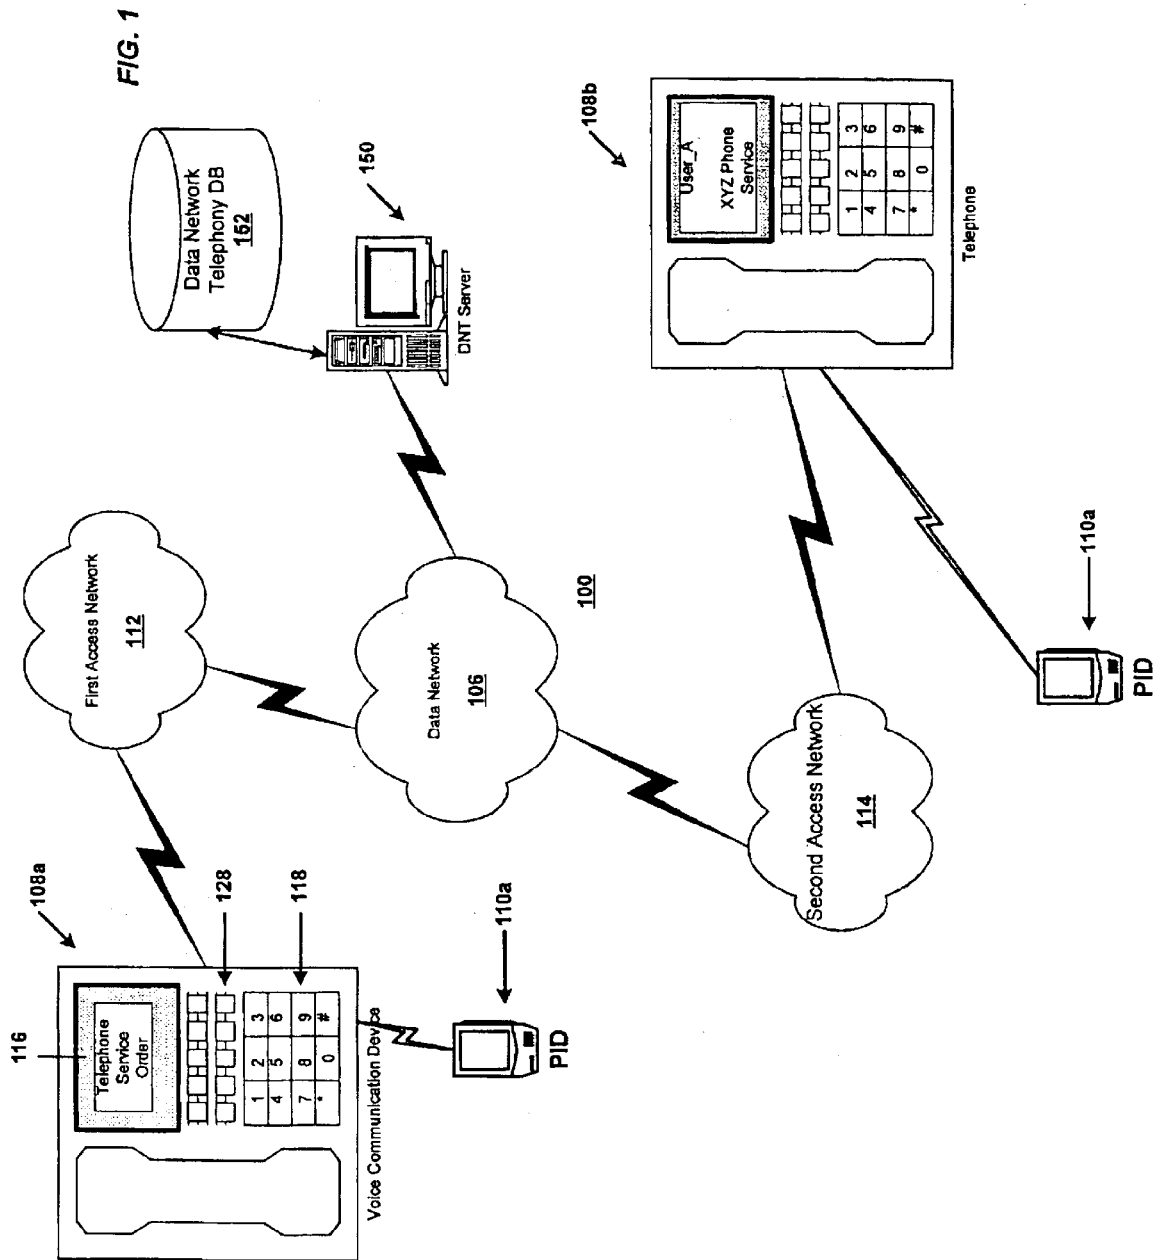

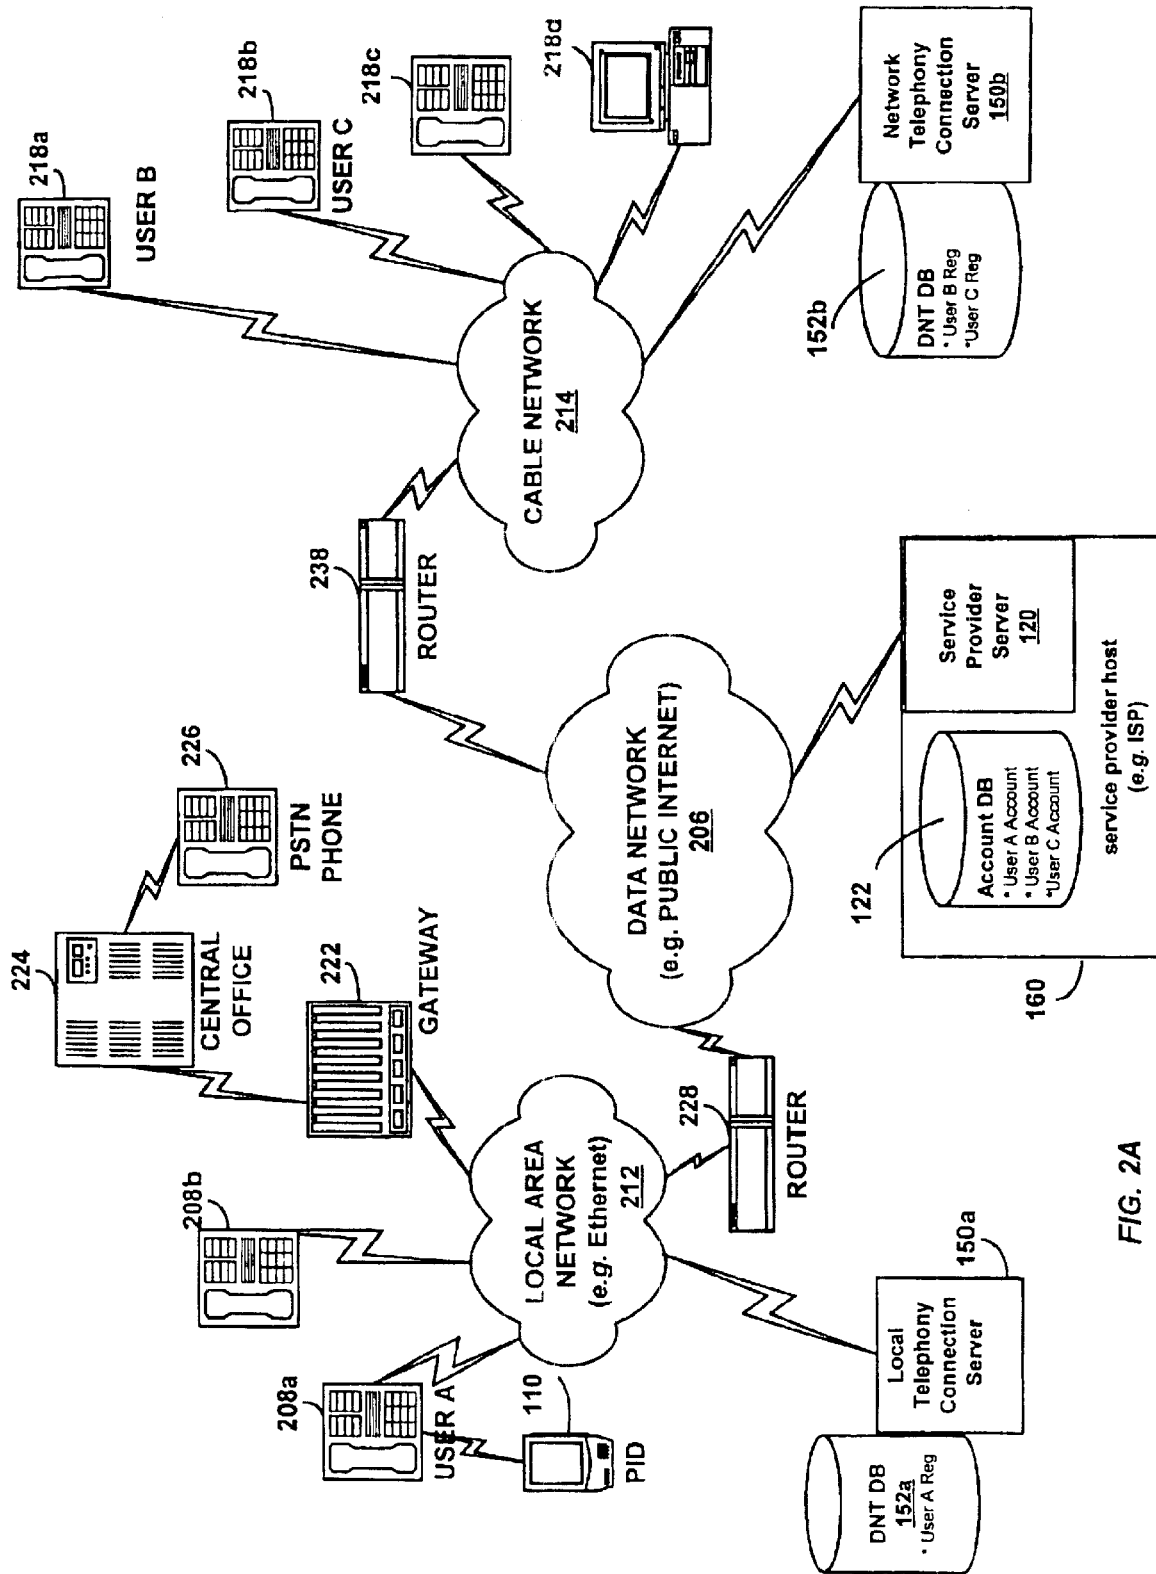


FIG. 2A

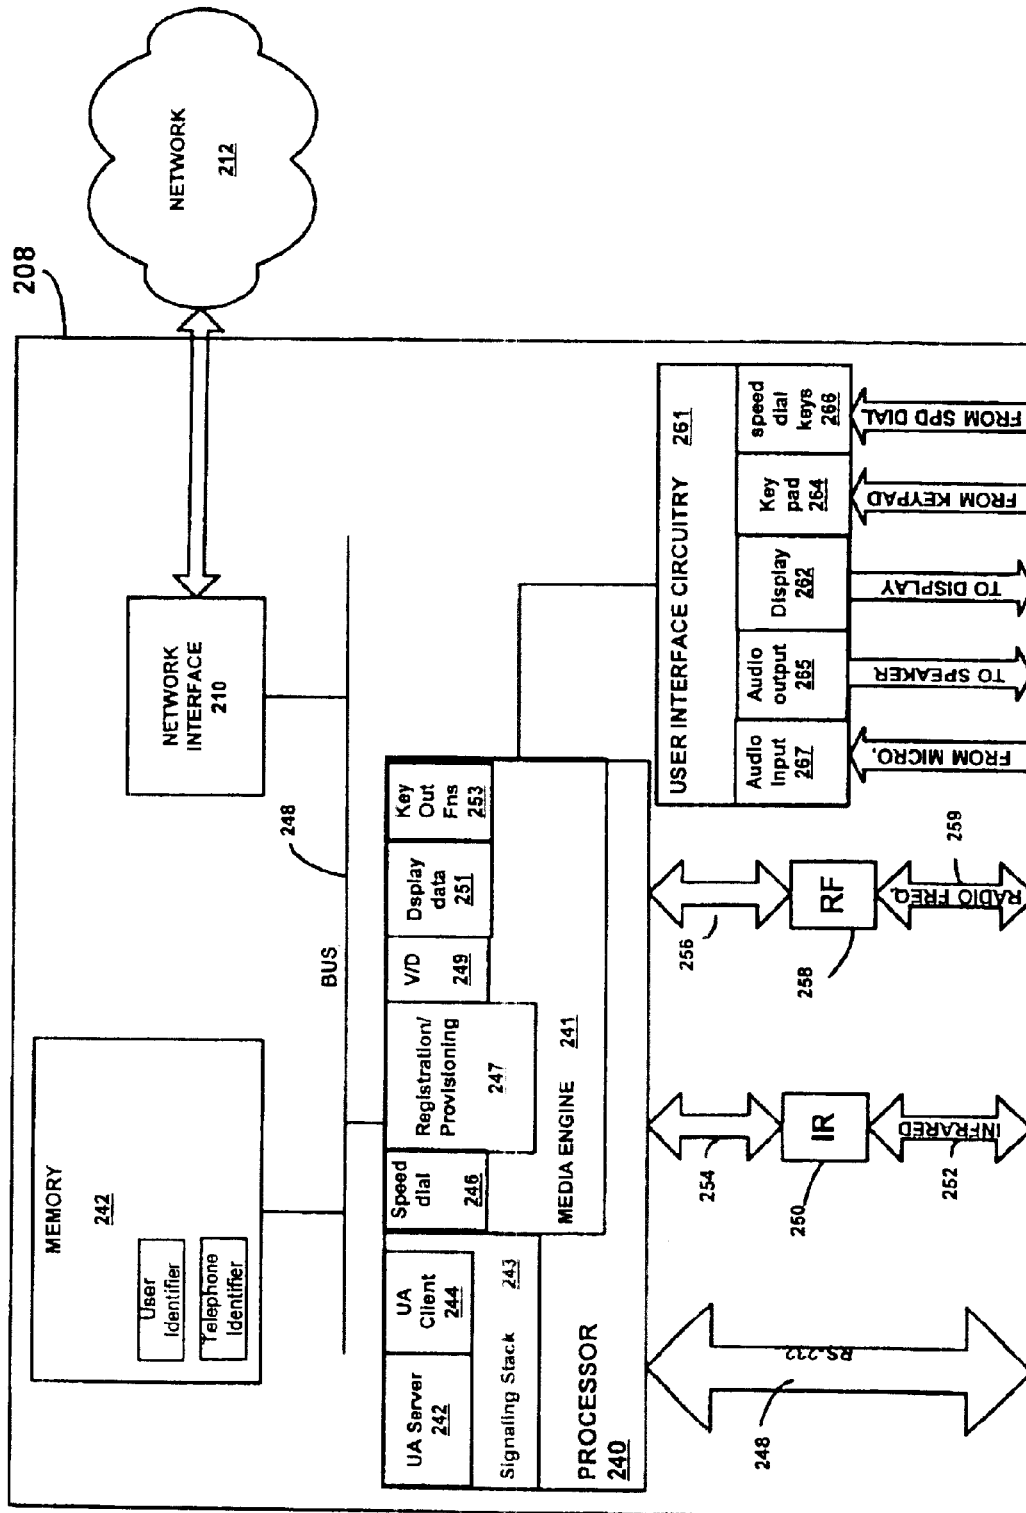


FIG. 2B

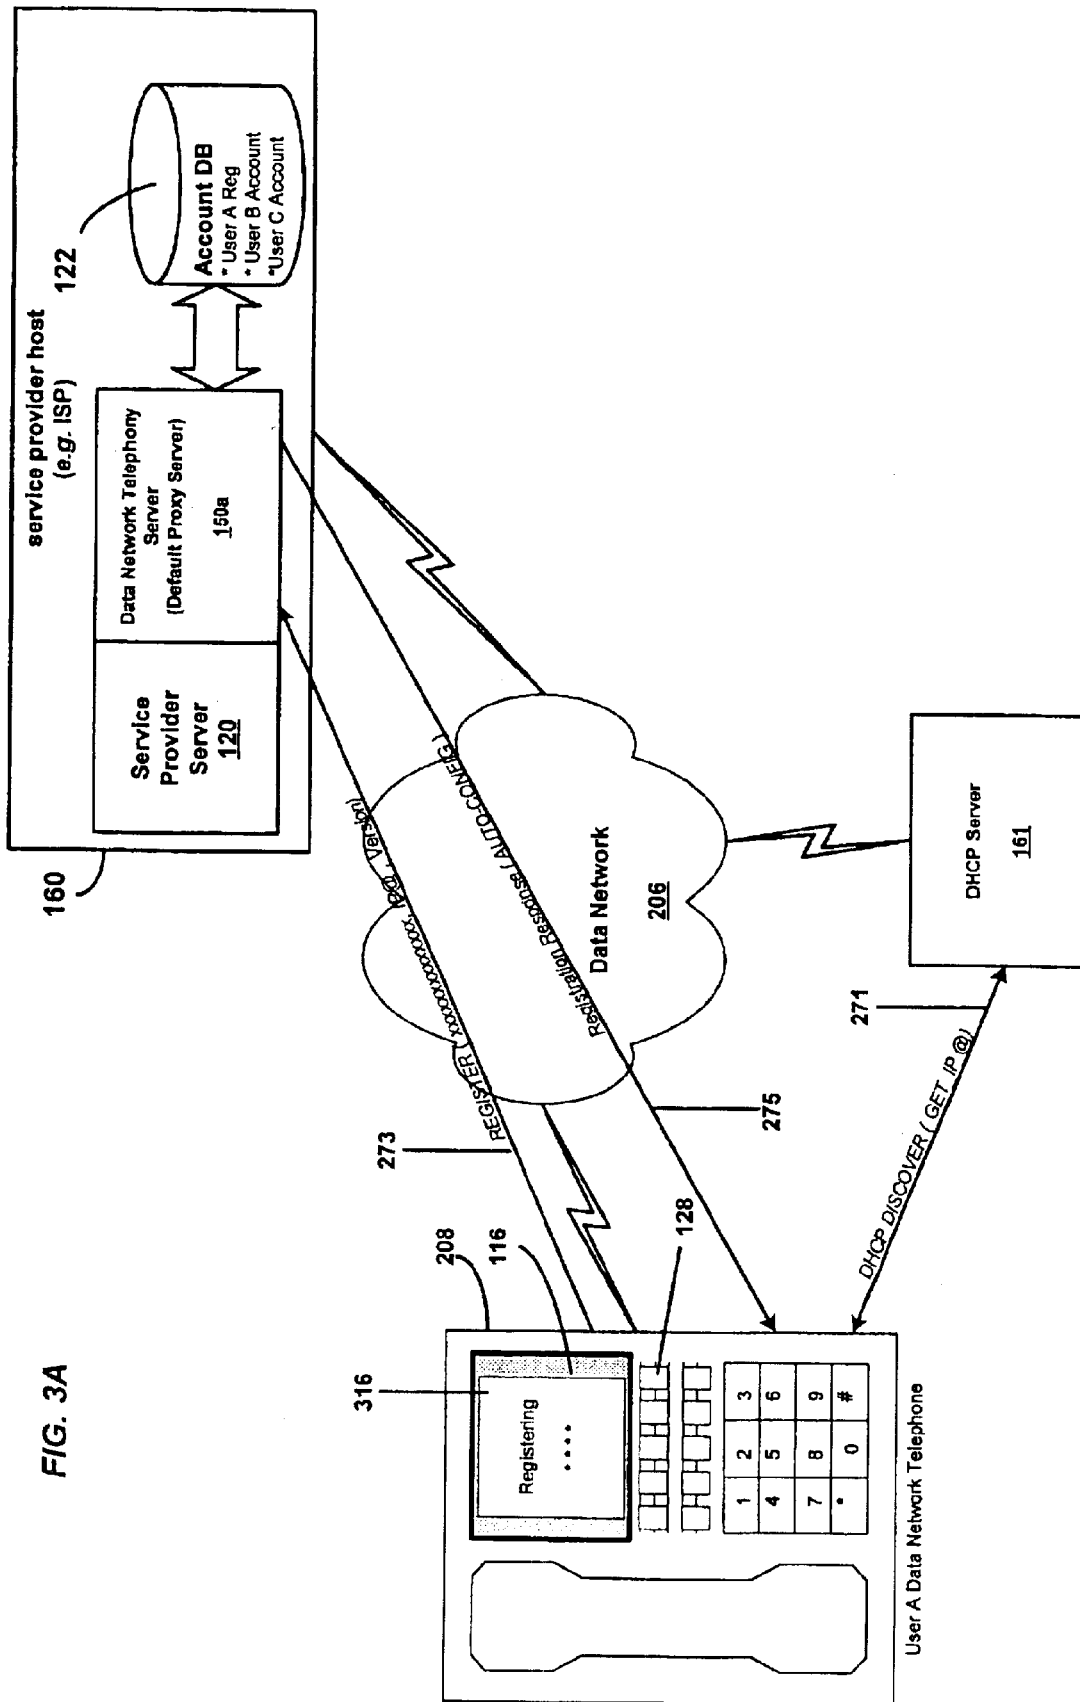


FIG. 3A



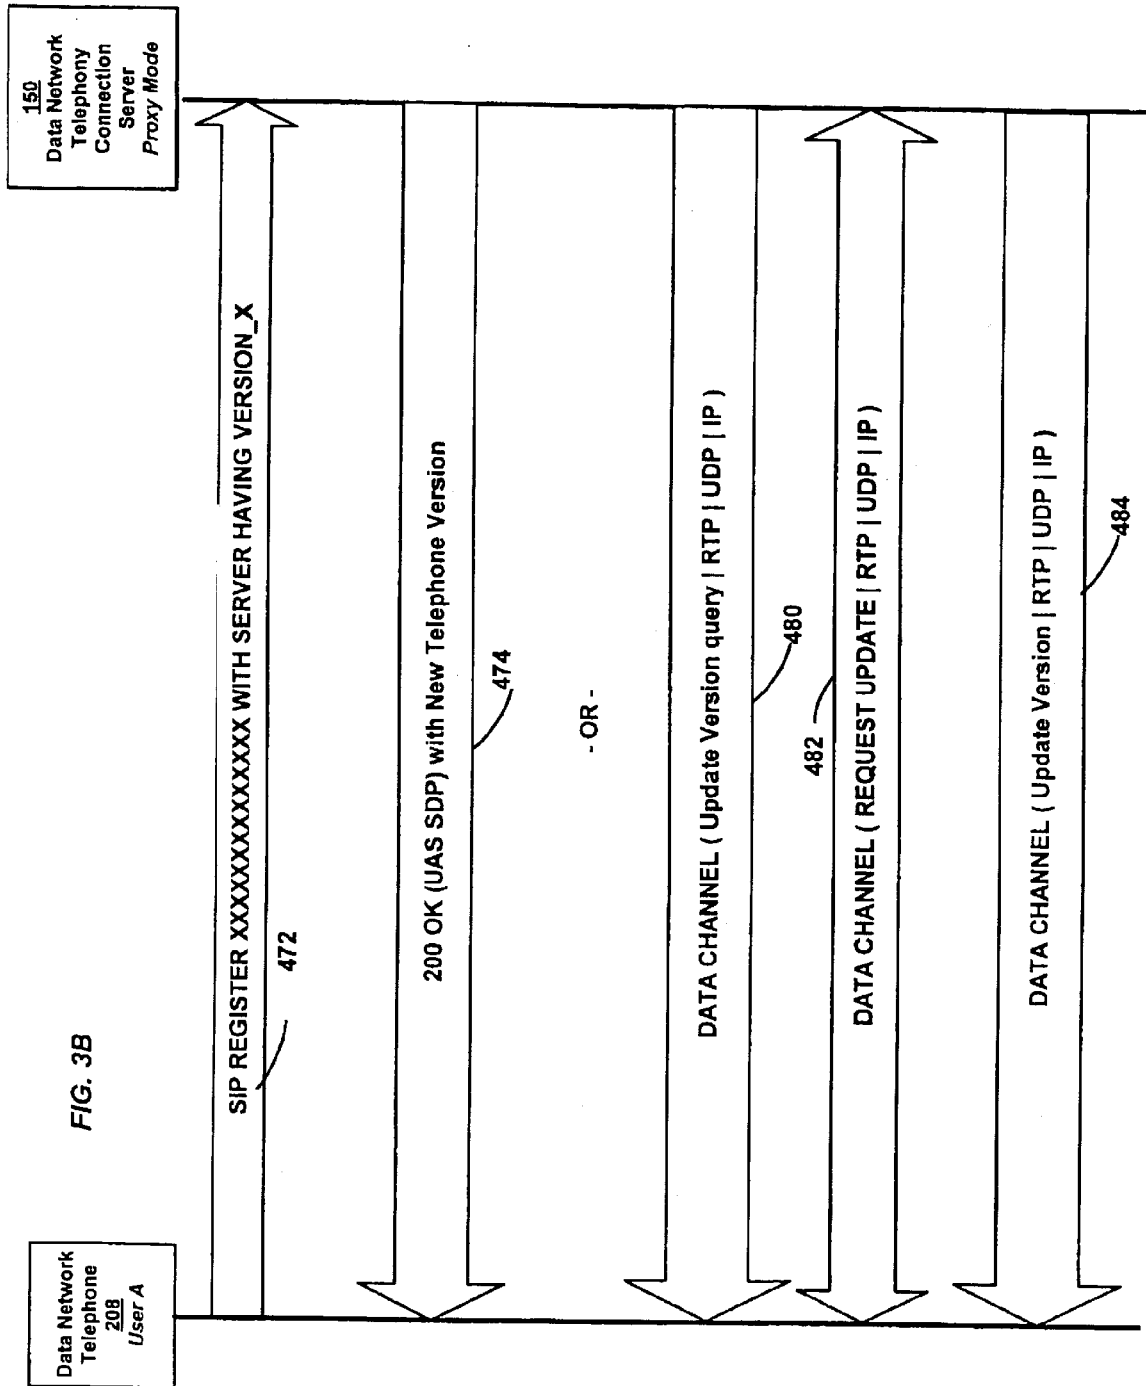


FIG. 3B

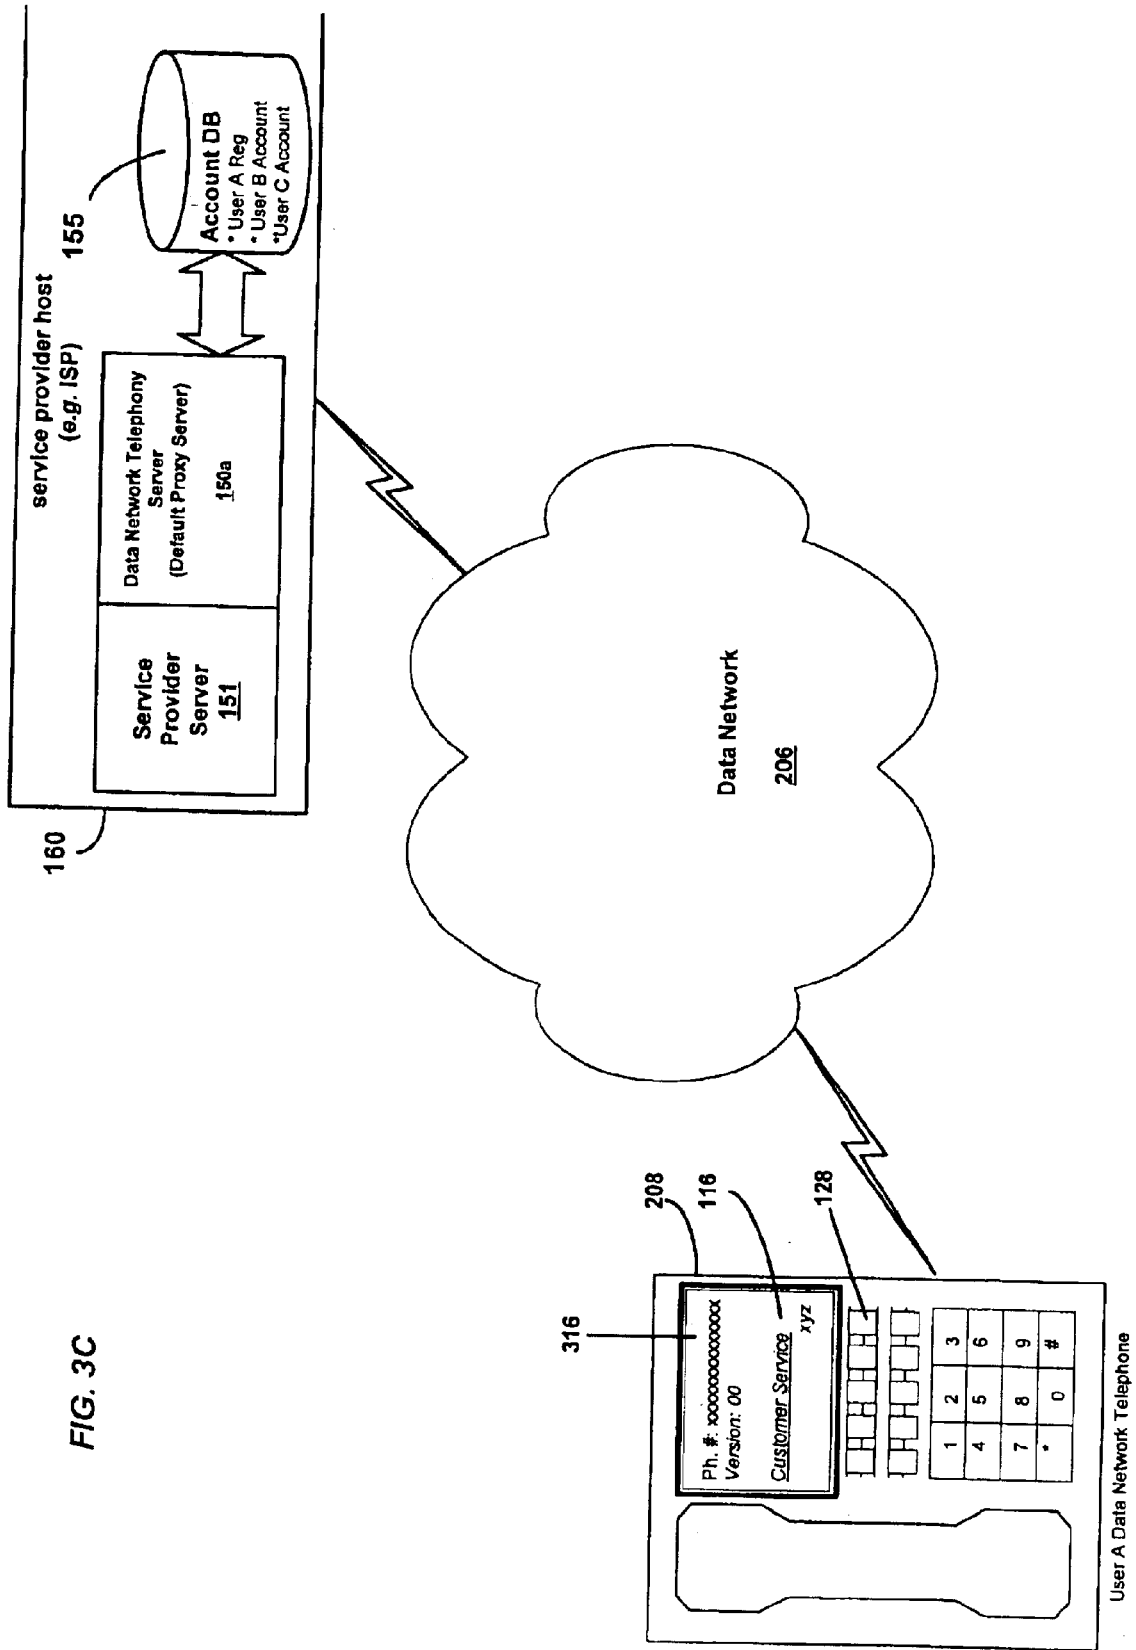


FIG. 4A

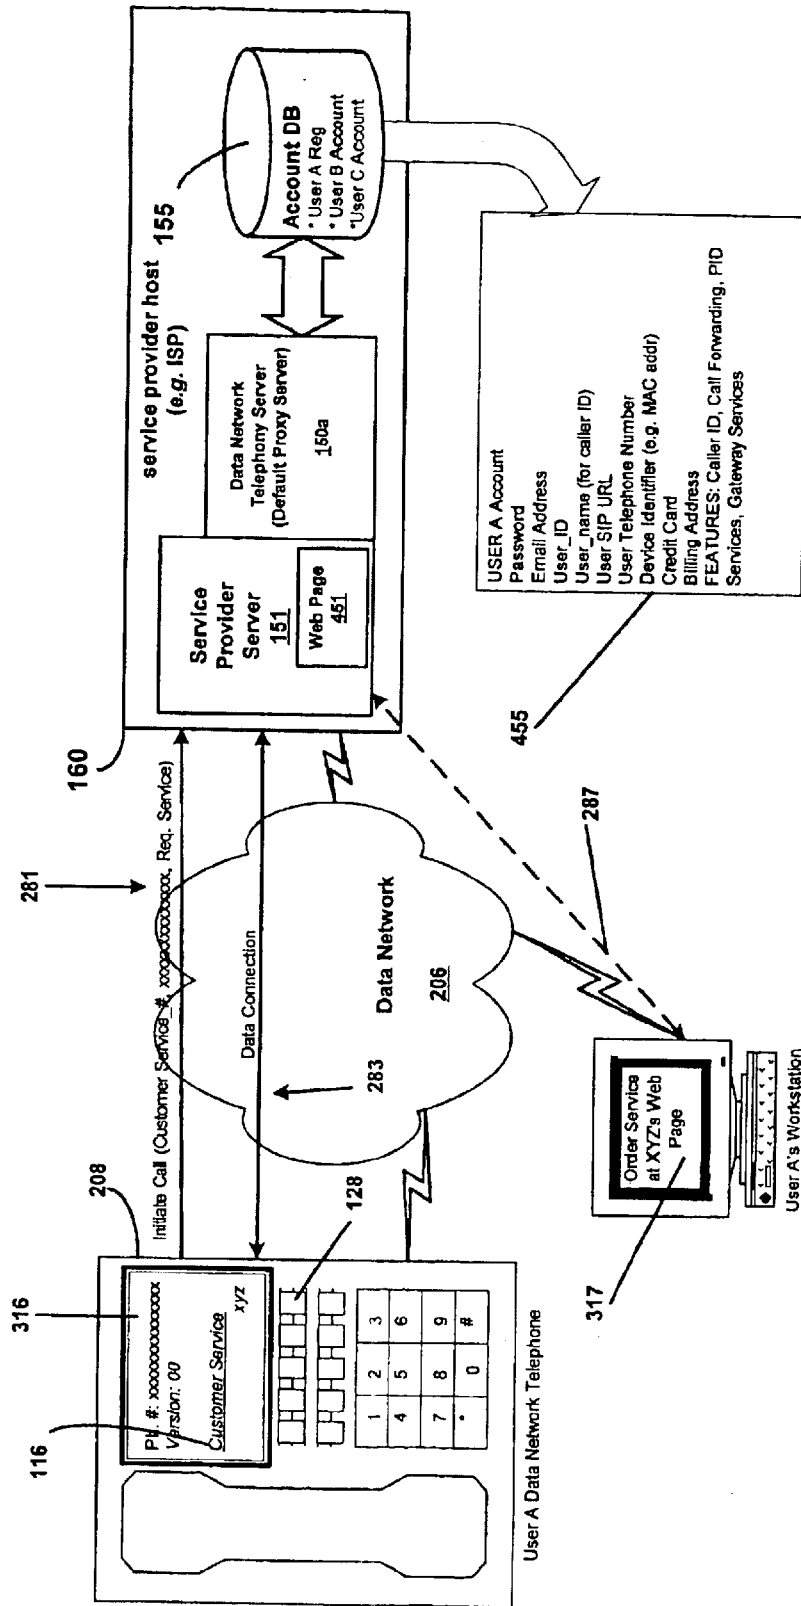


FIG. 4B

317

**New Account**

Welcome to 3Com/(Yahoo!, AOL, MSN, AT&T, MCI, Level 3) Internet Voice Services.  
All 3Com/XXX Internet voice services members can be reached at  
1-800-555-3Com Ext. (provider number)(personal number)

Your personal number can be any number you choose which is not already taken.

Choose your personal number (variable length)

A password:

Re-enter:

A short name for caller ID:


Your e-mail address:

The phone devise ID:

A SIP URL: (optional)

A credit card and expiration date:

FIG. 4C

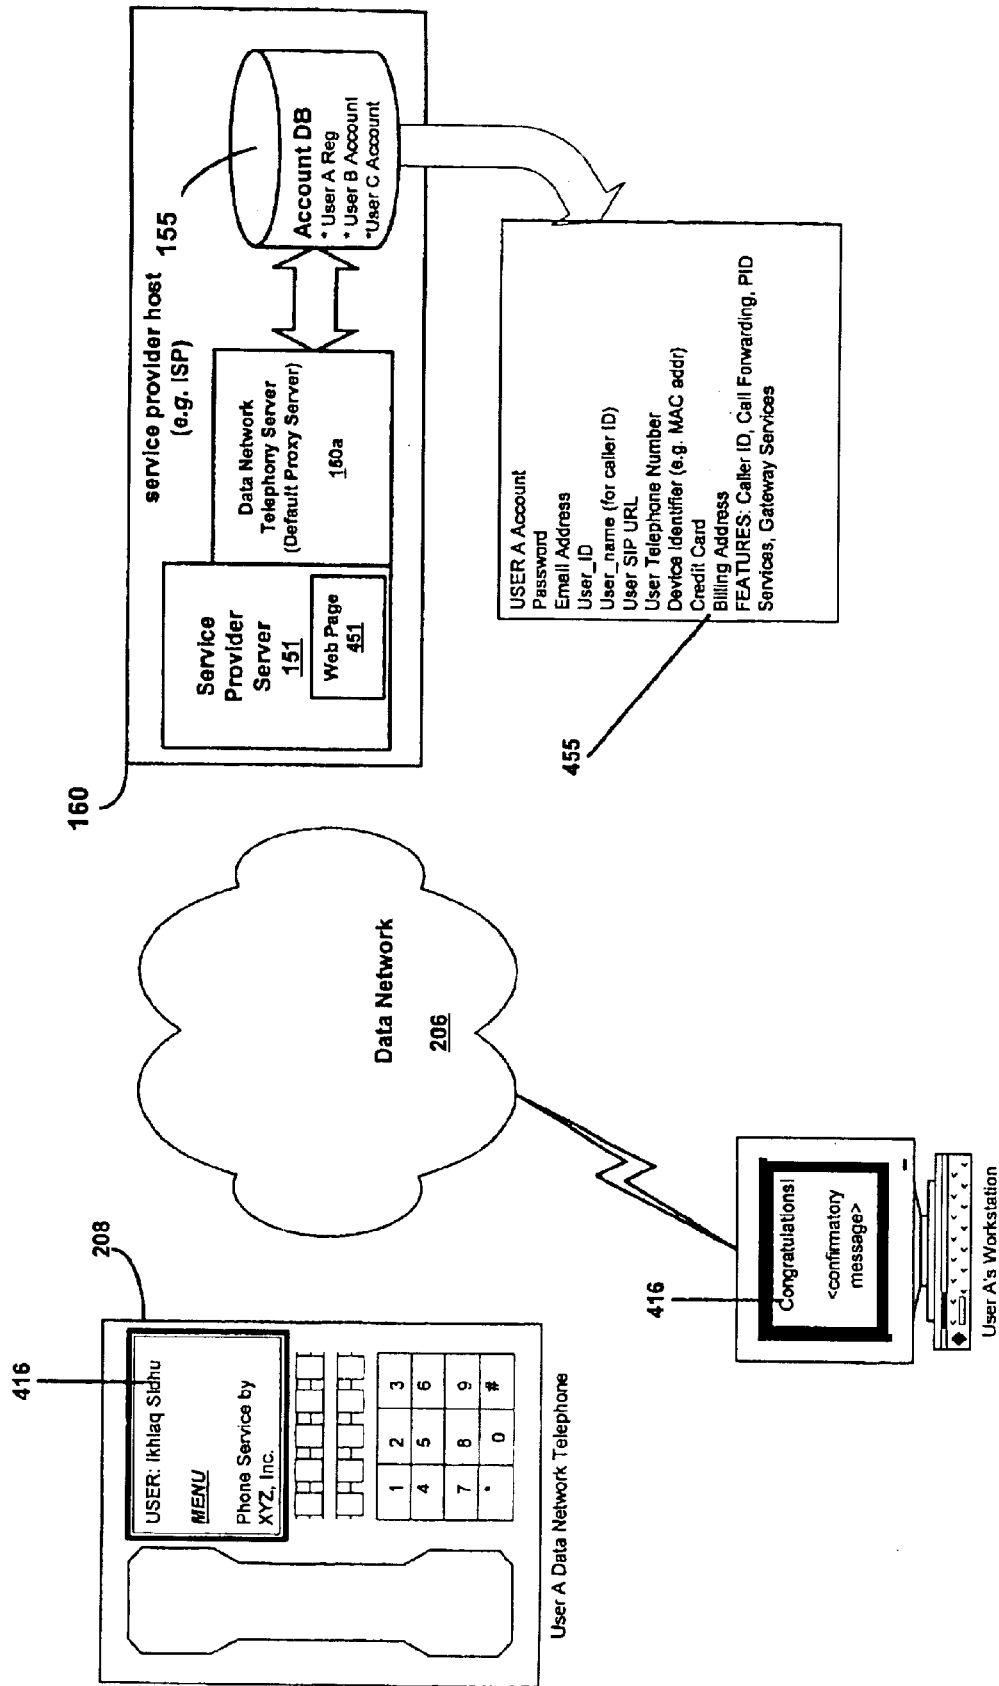

**Congratulations!**

An E-mail has been sent to you. You must reply to that e-mail to activate this account. You should print this page and keep it for future reference.

+ Your new "personal" phone number is 1-800-5553Com      Ext. 200 634-0610  
+ Your SIP address (for Palm PDA based dialing) is ikhlaq\_sidhu.3com.com@xxx.com

Some Frequently asked questions:

Q: How do I dial another 3Com / XXX Internet phone user?  
A: You only need to dial the extension number. For example other 3Com/(...) users with the same provider code (200) can call you at 634-0610. To call a user with another (say 202) provider number, you must dial 1-202-634-0610.

Q: How do I dial traditional people phones?  
A: Dial 9 to get out of the system. I.e. dial 9, 1800-CALL.ATT to use a AT&T calling card.


Q: How are calls billed?  
A: There is no extra charge for calls to other 3Com/XXX subscribers.  
There is no extra charge to make domestic long distance calls over the Public Telephone Net. International calls over the public network are billed to your credit card on a per call basis.

Q: How do I set speed dials and other advanced features?  
A: Goto [www.3comvoice.com/ikhlaq\\_sidhu.3com.com](http://www.3comvoice.com/ikhlaq_sidhu.3com.com) and enter your password ZZZ.

Q: How do I use speed dialing from my Palm PDA?  
A: The proxy server option must be set to [proxy@xxx.com](mailto:proxy@xxx.com). Any subscriber with an e-mail address can be auto dialed by. . .

417

FIG. 4D

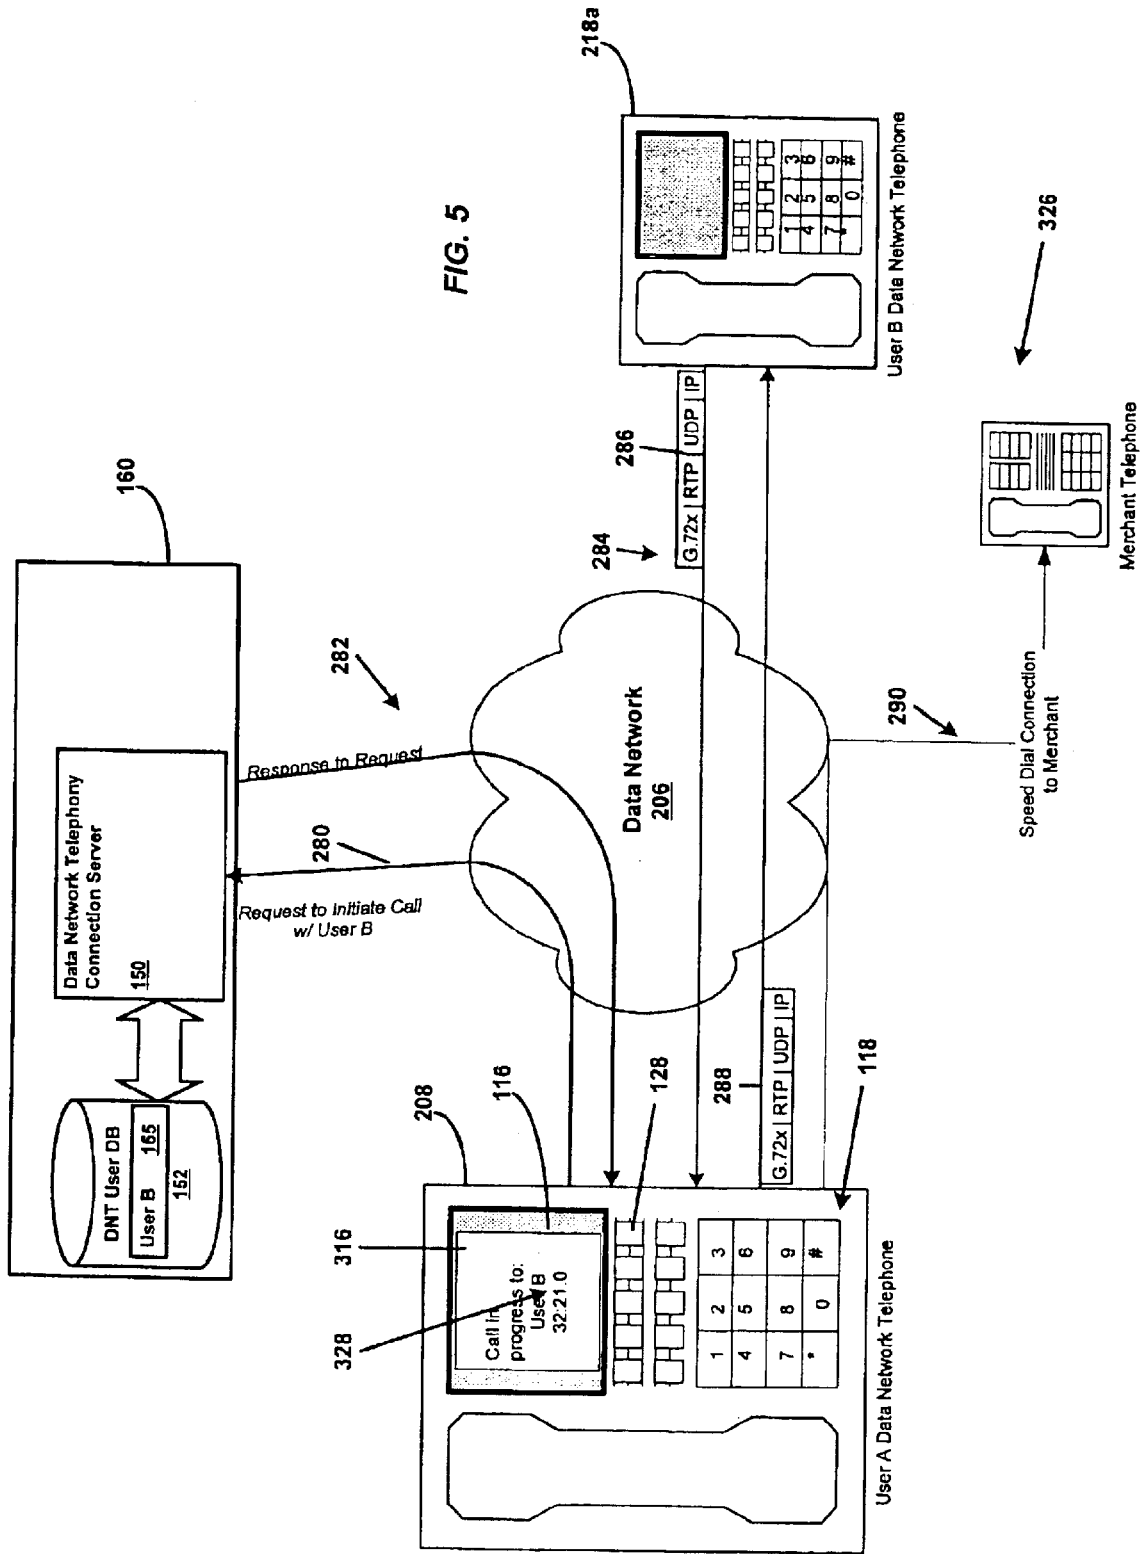

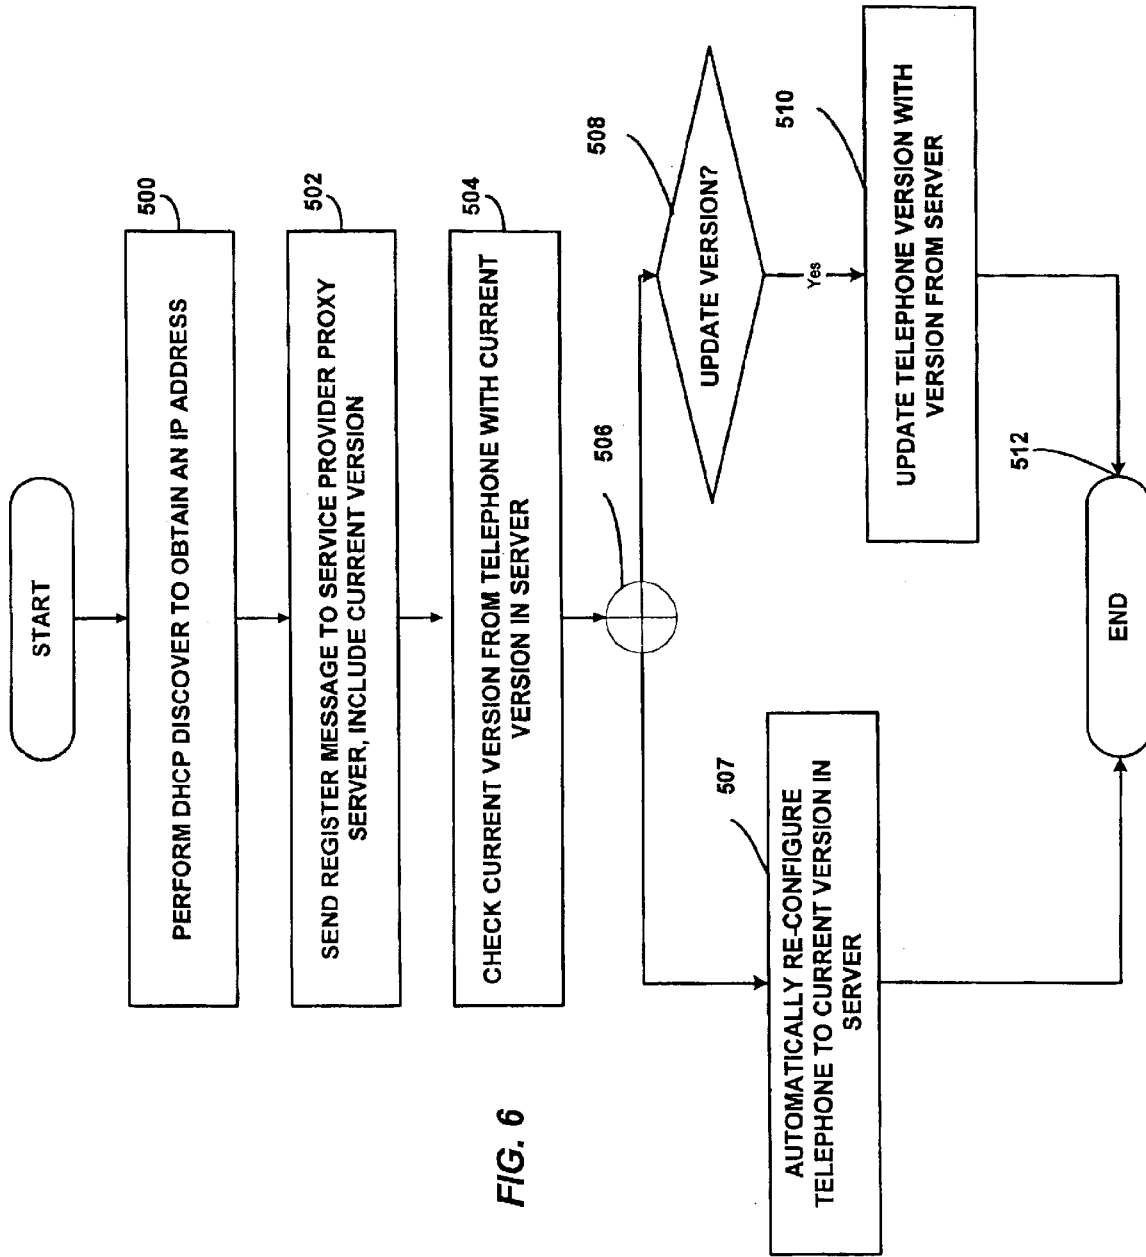


FIG. 6




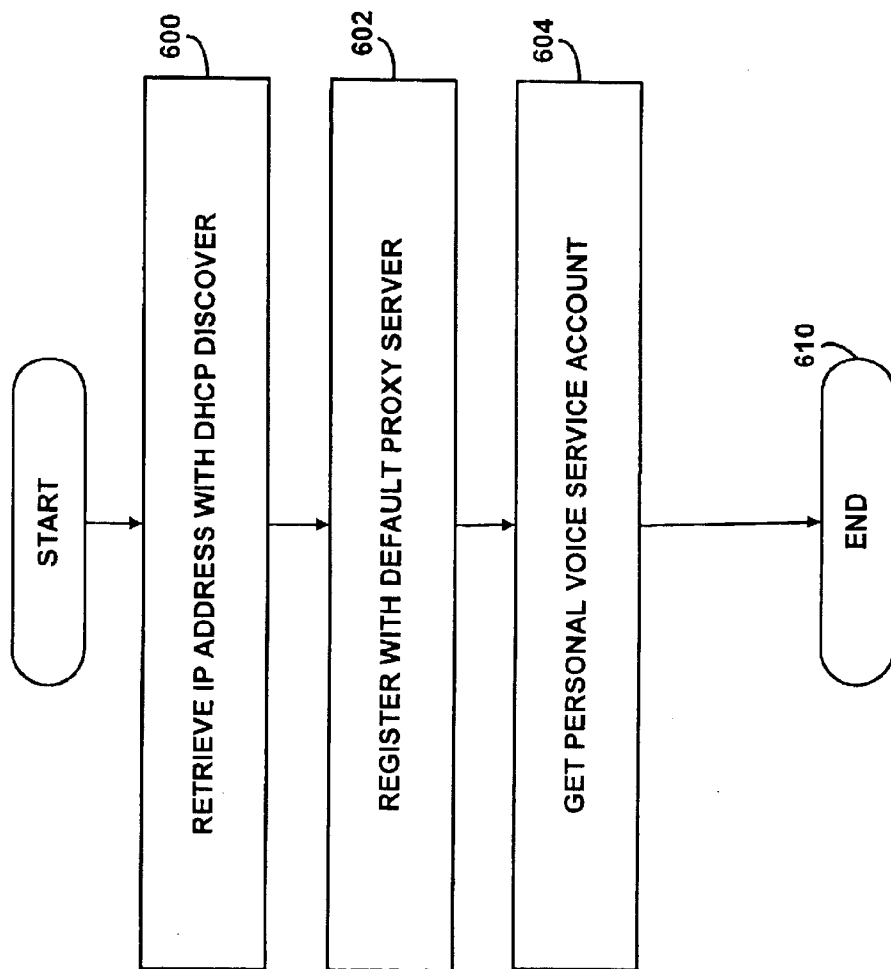


FIG. 7

FIG. 8

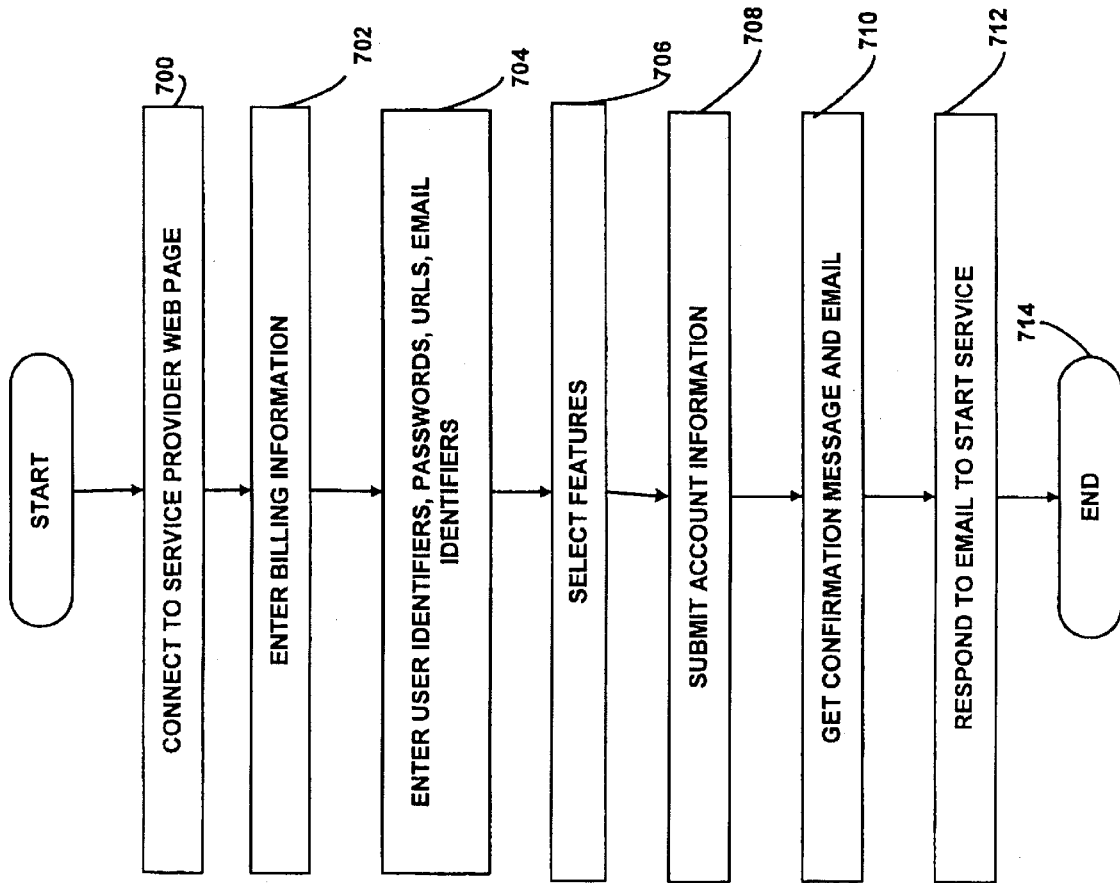

**SYSTEM AND METHOD FOR PROVIDING  
USER-CONFIGURED TELEPHONE SERVICE  
IN A DATA NETWORK TELEPHONY  
SYSTEM**

**BACKGROUND OF THE INVENTION**

**A. Field of the Invention**

The present invention is related to field of telecommunications, and more particularly to a system and method for providing communication services over a network.

**B. Description of the Related Art and Advantages of the Present Invention**

For many years, telephone service providers on the Public Switched Telephone Network (PSTN) provided their customers nothing more than a telephone line to use to communicate with other subscribers. Over time, telephone service providers have enhanced their service by providing Custom Local Area Signaling Service (CLASS) features to their customers. Similar communication services are provided by a Private Branch Exchange (PBX), which is typically implemented in a nonresidential setting.

The CLASS features permit customer subscribers of the features to tailor their telephone service according to individual needs. Some of the well known CLASS features are:

**Call blocking:** The customer may specify one or more numbers from which he or she does not want to receive calls. A blocked caller will hear a rejection message, while the callee will not receive any indication of the call.

**Call return:** Returns a call to the most recent caller. If the most recent caller is busy, the returned call may be queued until it can be completed.

**Call trace:** Allows a customer to trigger a trace of the number of the most recent caller.

**Caller ID:** The caller's number is automatically displayed during the silence period after the first ring. This feature requires the customer's line to be equipped with a device to read and display the out-of-band signal containing the number.

**Caller ID blocking:** Allows a caller to block the display of their number in a callee's caller ID device.

**Priority ringing:** Allows a customer to specify a list of numbers for which, when the customer is called by one of the numbers, the customer will hear a distinctive ring.

**Call forwarding:** A customer may cause incoming calls to be automatically forwarded to another number for a period of time.

A customer subscriber to a CLASS feature may typically activate and/or de-activate a CLASS feature using "\*" directives (e.g., \*69 to automatically return a call to the most recent caller). CLASS features may also be implemented with the use of out-of-band data. CLASS feature data is typically transmitted between local Class-5 switches using the Signaling System 7 (SS7).

Local Exchange Carriers (LECs) and other similar organizations maintain CLASS offices that typically contain a database entry for each customer. The database allows specification of the CLASS features a customer has subscribed to, as well as information, such as lists of phone numbers, associated with those features. In some cases, customers may edit these lists on-line via a touch-tone interface. A list of all phone numbers that have originated or

terminated a call with each customer is often included in the CLASS office database. For each customer, usually only the most recent number on this list is stored by the local Class-5 switch.

A Private Branch Exchange (PBX), is a stored program switch similar to a Class-5 switch. It is usually used within a medium-to-large-sized business for employee telephony service. Since a PBX is typically operated by a single private organization, there exists a wide variety of PBX services and features. Custom configurations are common, such as integration with intercom and voice mail systems. PBX's typically support their own versions of the CLASS features, as well as other features in addition to those of CLASS. Most PBX features are designed to facilitate business and group communications.

A summary of typical PBX features includes:

**Call transfer:** An established call may be transferred from one number to another number on the same PBX.

**Call forwarding:** In addition to CLASS call forwarding, a PBX number can be programmed to automatically transfer a call to another number when the first number does not answer or is busy.

**Camp-on queuing:** Similar to PSTN call return, a call to a busy number can be queued until the callee can accept it. The caller can hang up their phone and the PBX will ring them when the callee answers.

**Conference calling:** Two or more parties can be connected to one another by dialing into a conference bridge number.

**Call parking:** An established call at one number can be put on hold and then reestablished from another number. This is useful when call transfer is not warranted.

**Executive override:** A privileged individual can break into an established call. After a warning tone to the two participants, the call becomes a three-way call.

While the CLASS and PBX features have enhanced the offerings of service providers that use the PSTN, the features are nevertheless limited in their flexibility and scope. The effect to the user is that the features become clumsy and difficult to use. For example, in order to use the Call Forwarding function, the user must perform the steps at the user's own phone prior to moving to the location of the telephone to which calls will be forwarded. A more desirable approach, from the standpoint of usefulness to the user, would be to perform the steps at the telephone to which calls will be forwarded.

Much of the lack of flexibility of the PSTN features is due to the lack of flexibility in the PSTN system itself. One problem with the PSTN is that the terminal devices (e.g. telephones) lack intelligence and operate as "dumb" terminals on a network having the intelligence in central offices. Most PSTN telephones are limited in functional capability to converting the analog signals they receive to sound and converting the sound from the handset to analog signals.

Some PSTN telephones have a display device and a display function to display specific information communicated from intelligent agents in the PSTN network using the PSTN signaling architecture. For example, some PSTN telephones have a display function to enable the Caller ID feature. Even such PSTN telephones are limited however by the closed PSTN signaling architecture, which prohibits access by the PSTN telephones to the network signaling protocols. The display functions are effectively limited to displaying text, again, as a "dumb" terminal.

The Internet presents a possible solution for distributing intelligence to telephony terminal devices. In Internet

telephony, digitized voice is treated as data and transmitted across a digital data network between a telephone calls' participants. One form of Internet telephony uses a telephony gateway/terminal where IP telephony calls are terminated on the network. PSTN telephones are connected by a subscriber line to the gateway/terminal at the local exchange, or at the nearest central office. This form of Internet telephony provides substantial cost savings for users. Because the PSTN portion used in Internet telephony calls is limited to the local lines on each end of the call, long distance calls may be made for essentially the cost of a local call. Notwithstanding the costs savings provided by this form of Internet telephony, it is no more flexible than the PSTN with respect to providing enhancements and features to the basic telephone service.

In another form of Internet telephony, telephones are connected to access networks that access the Internet using a router. The telephones in this form of Internet telephony may be substantially more intelligent than typical PSTN telephones. For example, such a telephone may include substantially the computer resources of a typical personal computer.

It would be desirable to incorporate CLASS and PBX features into a data network telephony system that uses a data network such as the Internet.

It would be desirable to provide new features and enhancements to telephony service that accommodates and conforms to users' needs.

It would also be desirable to provide features and capabilities to telephone service that create new opportunities for users and for service providers.

The present invention addresses the above needs by providing a system in a data network telephony system, such as for example, the Internet, that provides a way for users to make brand new telephones usable without having to wait while the telephone company programs an account. The embodiments of the present invention may also be used to modify existing telephone accounts to incorporate new features, or features that may be desired for a limited amount of time.

One advantage of the present invention is that telephone features become user-configurable.

Another advantage is that the extent to which features are user-configurable may be determined by the service provider. The service provider may wish to make a few basic features standard and impose their use in a registration function. Other features may then be made selectable by the user.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Presently preferred embodiments of the invention are described below in conjunction with the appended drawing figures, wherein like reference numerals refer to like elements in the various figures, and wherein:

FIG. 1 is block diagram of a data network telephony system for providing telephony and enhanced telephony services in accordance with embodiments of the present invention;

FIG. 2A shows one embodiment of the system of FIG. 1 showing examples of access to data network telephony service providers;

FIG. 2B shows one example of one of the data network telephones in FIG. 2A;

FIG. 3A is a block diagram showing the interaction between components in accordance with one example of a system and method for configuring a data network telephone for service in the data network telephony system in FIG. 2A;

FIG. 3B is a block diagram showing one example of the interaction between components in the embodiment shown in FIG. 4A to update the data network telephone version;

FIG. 3C is a block diagram showing one example of the interaction between components in the embodiment shown in FIG. 4A when registration is complete;

FIG. 4A is a block diagram showing one example of the interaction between components in the embodiment shown in FIG. 4A to provision the data network telephone version with a voice account;

FIG. 4B is a depiction of a sample screen for ordering telephone service for the data network telephone of FIG. 5A;

FIG. 4C is a block diagram showing the interaction between components in the embodiment shown in FIG. 4A to confirm service;

FIG. 4D is a depiction of a sample screen for confirming telephone service for the data network telephone of FIG. 5A;

FIG. 5 is a block diagram showing the interaction between components in accordance with an example of a system and method for communicating by data network telephone in the data network telephony system in FIG. 2A;

FIG. 6 is a flowchart showing an example of a method for registering a data network telephone using the data network telephony system of FIG. 1;

FIG. 7 is a flowchart showing an example of a method for provisioning a data network telephone in the data network telephony system of FIG. 1; and

FIG. 8 is a flowchart showing an example of confirming the telephony service ordered using the method described in FIG. 7.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The following references to patent applications filed concurrently herewith are incorporated by reference:

"System and Method for Controlling Telephone Service Using a Wireless Personal Information Device" to Schuster, et al.

"System and Method for Advertising Using Data Network Telephone Connections" to Schuster, et al.

"System and Method for Accessing a Network Server Using a Portable Information Device Through a Network Based Telecommunication System" to Schuster, et al.

"System and Method for Interconnecting Portable Information Devices Through a Network Based Telecommunication System" to Schuster, et al.

"System and Method for Enabling Encryption on a Telephony Network" to Schuster, et al.

"System and Method for Using a Portable Information Device to Establish a Conference Call on a Telephony Network" to Schuster, et al.

"System and Method for Associating Notes with a Portable Information Device on a Network Telephony Call" to Schuster, et al.

"System and Method for Providing Shared Workspace Services Over a Telephony Network" to Schuster, et al.

"System and Method for Providing Service Provider Configurations for Telephones in a Data Network Telephony System" to Schuster, et al. The following additional references are also incorporated by reference herein:

"Multiple ISP Support for Data Over Cable Networks" to Ali Akgun, et al.

"Method and System for Provisioning Network Addresses in a Data-Over-Cable System" to Ali Akgun, et al., Ser. No. 09/218,793.

“Network Access Methods, Including Direct Wireless to Internet Access” to Yingchun Xu, et al., Ser. No. 08/887, 313

#### A. Data Network Telephony System

FIG. 1 is a block diagram showing an example of a system 100 for providing telephony services according to preferred embodiments of the present invention. The system includes a data network 106. A first voice communication device 108a communicates by a voice connection over the data network 106 by establishing the connection via first access network 112. The voice connection may be linked to a second voice communication device 108b which is accessed via a second access network 114.

The data network 106 in the system 100 typically includes one or more Local Area Networks (LANs) connected to one another or to a Wide-Area Network (WAN), such as an Internet Protocol (IP) network, to provide wide-scale data connectivity. The data network 106 may use Voice Over Packet (VOP) schemes in which voice signals are carried in data packets. The network 106 may also include a connection to the Public Switched Telephone Network (PSTN) to allow for voice connections using traditional circuit switching techniques. In one embodiment, the data network 106 may include one or more LANs such as Ethernet LANs and support data transport protocols for performing Voice-over-Internet-Protocol (VOIP) techniques on the Internet. For further details regarding VoIP, see the information available through the Internet Engineering Task Force (IETF) at www.ietf.org. In addition, an Internet Telephony gateway may be included within the system 100 to allow for voice connections to users connected by subscriber lines at a PSTN Central Office.

The first and second voice communication devices 108a and 108b typically include a voice input, a voice output and a voice processing system (described further below with reference to FIGS. 2B). The voice processing system converts voice sound from the voice input to digital data signals that are communicated on a voice connection over the data network. The voice processing system also converts digital data signals received from the voice connection to voice sound at the voice output. The voice communication devices 108a and 108b typically include a central processing unit and memory to store and process computer programs. Each voice communication device 108a and 108b typically includes a unique network address, such as an IP address, in memory to uniquely identify it to data network 106 and permit data packets to be routed to the device.

A first personal information device (PID) 110a may be connected to the first voice communication device 108a and may communicate over the data network 106 by connecting via the access network 112. The PID 110a may communicate with a second PID 110b connected to the second voice communications device 108b. Connections by the PIDs 110a,b may be made using the IrDA protocol or the Bluetooth system. Point to point links may include an RS232 port.

The PIDs 110a,b each contain user attributes stored in a user information database. The user attributes may contain such information as a user identifier, schedule information, and other information that is associated with a user of the PIDs 110a,b. The PIDs 110a,b each include a user interface allowing a user to easily enter and retrieve data. In a preferred embodiment, the user interface includes a pressure-sensitive display that allows a user to enter input with a stylus or other device. An example of a PID with such an interface is a PDA (Personal Digital Assistant), such as one of the Palm™ series of PDAs offered by 3Com Corporation. The

PIDs 110a,b may include other functionality, such as wireless phone or two way radio functionality.

In one embodiment, the voice communication device 108a includes a handset with a receiver and transmitter similar or identical to handsets of traditional circuit-switched telephones. A console on which the handset sits may include the voice processing system, a display 116 and a keypad 118. The voice communication device 108a may also include a speed dial key set 128 programmed, or assigned to initiate connections to other voice communication devices that may be connected to the data network 106. In a preferred embodiment, the keys on the speed dial key set 128 may be programmed remotely by a message carried on a voice connection using a selected data transport protocol.

One example of the voice communication device 108a in a preferred embodiment is the NBX 100™ communication system phones offered by 3Com® Corporation, that has been modified, as described herein, to perform speed dial programming. In alternative embodiments, the voice communication device 108a may include any device having voice communications capabilities. For example, a personal computer having a microphone input and speaker output may also be used as the voice communication device 108a. Other configurations for the user interface are also intended to be within the scope of the present invention.

The details relating to operation of the voice communication devices 108a and 108b depend on the nature of the data network 106 and the nature of the access networks 112, 114 connecting the voice communication devices 108a and 108b to each other and/or to other network entities. The access networks 112, 114 typically include any high bandwidth network adapted for data communications, i.e. a network having greater than 64,000 bits-per-second (bps) bandwidth. The access networks 112, 114 may link to the voice communication device 108a using an Ethernet LAN, a token ring LAN, a coaxial cable links (e.g. CATV adapted for digital communication), a digital subscriber line (DSL), twisted pair cable, fiberoptic cable, an integrated services digital network (ISDN) link, and wireless links. In embodiments that may not require a bandwidth greater than 64,000 bps, the access networks 112, 114 may also include the PSTN and link the voice communications device 108a by an analog modem. Further details regarding specific implementations are described below, with reference to FIGS. 2A and 2B.

#### B. System For Providing Provisioning and Configuration Services for a Telephone Using A Data Network Telephony System

One advantage of the data network telephony system 100 in FIG. 1 is that a user may begin making telephone calls by connecting the data network telephone to the access network. Alternatively, another advantage of the system 100 is that the user may plug the data network telephone to the access network to receive rudimentary service, but obtain access to fully personalized, user-configured service account as well as to user-selected telephony enhancements and features.

A service provider server 120, connected to the data network 106, maintains user service accounts and manages the transport of data communications channels between voice communications devices 108a, 108b. A service provider database 122 stores the user accounts and other subscription information. In accordance with preferred embodiments, the service provider server 120 provides voice communications devices 108a, 108b with rudimentary service sufficient to connect to a service provider. The

service provider server **120** then sets up user interactive connections to allow a user to configure a telephony user account. The user account is then activated substantially contemporaneously with the user interactive connection once the user submits the information. By substantially contemporaneously, it is meant that no substantial waiting period is needed before the user account may be used. In alternative embodiments, the service provider server **120** configures voice communications devices **108a**, **108b** with a full, ready-to-use configuration. The service provider host **120** also makes modifications to the user accounts easy and immediate in effect. A user may select features for temporary use. For example, a user may set up call forwarding to use while at a meeting for a week, and then disable it for other times.

#### 1. Local Area Network As An Exemplary Access Network

FIG. 2A is a block diagram showing one example of the system **100** of FIG. 1 for providing customized communication services according to the present invention. The system **200** in FIG. 2A includes a local area network **212**, connected to a data network **206** by a first router **228** and a cable network **214** connected to the data network **206** by a second router **238**. Those of ordinary skill in the art will appreciate that, while the local area network **212** and the cable network **214** are shown in FIG. 2A as access networks, any other type of network may be used. For example, the local area network **212** and/or the cable network **214** may be replaced by ISDN, DSL, or any other high-speed data link.

The local area network **212** provides data connectivity to its members, such as a first data network telephone **208a**, a second data network telephone **208b**, a gateway **222** and a network telephony connection server **150a**. The local area network **212** in FIG. 2A is an Ethernet LAN operating according to the IEEE 802.3 specification, which is incorporated by reference herein, however, any other type of local area network may be used. The local area network **212** uses the router **228** to provide the data network telephone **208a,b**, the gateway **222** and the network telephony connection server **150a** with access to the data network **206**. For example, the router **228** may perform routing functions using protocol stacks that include the Internet Protocol and other protocols for communicating on the Internet.

The network telephony connection server **150a** (hereinafter "telephony connection server") provides telephony registration, location and call initiation services for voice connections in which its members are a party. A user may register for telephony service with an administrator of the telephony connection server **150a** and receive a user identifier and a telephone identifier. The user identifier and telephone identifier may be sequences of unique alphanumeric elements that callers use to direct voice connections to the user. The telephony connection server **150a** registers users by storing user records in a data network telephony user database (hereinafter "user database") **152a** in response to registration requests made by the user.

The call setup process and the user and telephone identifiers preferably conform to requirements defined in a call management protocol. The call management is used to permit a caller anywhere on the data network to connect to the user identified by the user identifier in a data network telephone call. A data network telephone call includes a call setup process and a voice exchange process. The call setup process includes steps and message exchanges that a caller and callee perform to establish the telephone call. The actual exchange of voice signals is performed by a data communications channel. The data communications channel incorporates other data transport and data formatting protocols,

and preferably includes well-known data communications channels typically established over the Internet.

The call management protocol used in FIG. 2A is the Session Initiation Protocol (SIP), which is described in M. Handley et al., "SIP: Session Initiation Protocol," IETF RFC 2543, March 1999, incorporated by reference herein, however, any other such protocol may be used. Other protocols include H.323, the Media Gateway Control Protocol (MGCP), etc.

The local area network **206** is connected to a gateway **222**. The gateway **322** communicates with a PSTN central office **224**, which provides PSTN service to a PSTN phone **226**. The PSTN phone **226** is likely to be one of many PSTN phones serviced by the central office **224**. Additional portions of a PSTN network have been omitted from FIG. 2A to improve clarity. The PSTN network is well known by those having skill in the art of telecommunications.

The telephony connection server **150a** provides telephony service for mobile users. A user may be registered to use the first network telephone **208a** (which is identified by its telephone identifier), but move to a location near the second data network telephone **208b**. The user may re-register as the user of the second data network telephone **208b**. Calls that identify the user by the user's user identifier may reach the user at the second network telephone **208b**.

#### 2. The Data Network Telephones

The data network telephones **208a, b** are Ethernet phones which are telephones that include an Ethernet communications interface for connection to an Ethernet port. The Ethernet phones in FIG. 2A support the Internet Protocol (IP), using an IP address that is either statically configured or obtained by access to a Dynamic Host Configuration Protocol (DHCP) server.

FIG. 2B is a block diagram showing the data network telephone **208a** connected to the local area network **212** in FIG. 2A. The data network telephone **208** in FIG. 2B is connected to the network **212** by a network interface **210**. The network interface **210** may, for example, be a network interface card, and may be in the form of an integrated circuit. A bus **248** may be used to connect the network interface **210** with a processor **240** and a memory **242**. Also connected to the processor are user interface circuitry **261** and three alternative (and all optional) interfaces to the Personal Information Device (PID) **110** (shown in FIG. 1).

A first interface **248** includes an RS-232 serial connection and associated coupling hardware and mechanisms. The first alternative interface **248** may, for example, be a docking cradle for a PDA, in which information can be transferred between the PDA and the data network telephone **208**. The second alternative interface comprises a first connection **254**, such as an RS-232 connection, along with infrared circuitry **250** for converting signals into infrared output and for accepting infrared input. An infrared interface **252** may also be included within the second alternative interface. The third alternative interface comprises a first connection **256**, such as an RS-232 connection, along with radio-frequency circuitry **258** for converting signals into radio frequency output and for accepting radio frequency input. A radio frequency interface **259** may also be included as part of the third alternative interface.

The three alternative interfaces described above are merely examples, and additional means for implementing the interface between the data network telephone **208** and the PID may also be used. Although three interfaces are shown in FIG. 2B, there may be only one such interface in the data network telephone **208**. More than one interface may be included to improve flexibility and to provide redundancy in case of failure of an interface.

The user interface circuitry **261** includes hardware and software components that access the functions of the handset, display, keypad and speed dial keypad to provide user input and output resources for functions in the processor **240**. The user interface circuitry includes a display interface **262**, a keypad interface **264**, a speed dial interface **266**, an audio output interface **265** and an audio input interface **267**.

The audio input interface **267** may receive voice signals from a microphone or other audio input device and converts the signals to digital information. The conversion preferably conforms to the G.711 ITU Standard. Further processing of the digital signal may be performed in the audio input interface **267**, such as to provide compression (e.g. using G.723.1 standard) or to provide noise reduction, although such processing may also be performed in the processor **240**. Alternatively, the audio input interface **267** may communicate an analog voice signal to the processor **240** for conversion to digital information.

The audio output interface **265** receives digital information representing voice from the processor **240** and converts the information to sound. In one embodiment, the speaker interface receives information in the form of G.711 although other processing such as decompression may be performed in the speaker interface **265**. Alternatively, the processor **240** may convert digital information to analog voice signals and communicate the analog voice signals to the speaker interface **265**.

The speed dial interface **266**, the keypad interface **264** and the display interface **262** include well-known device interfaces and respective signal processing techniques. The speed dial interface **266** may include an interface to buttons on a keypad, or to display buttons that the user activates by pressing designated areas on the screen.

The user interface circuitry **261** may support other hardware and software interfaces. For example, a videophone implementation might also include a camera and monitor. The fixed communication device of the present invention is not limited to telephones or videophones—additional user interface types, for example, such as the ones needed for computer games, are also contemplated as being within the scope of the present invention.

The processor **240** may consist of one or more smaller processing units, including, for example, a programmable digital signal processing engine. In the preferred embodiment, the processor is implemented as a single ASIC (Application Specific Integrated Circuit) to improve speed and to economize space. The processor **240** also includes operating system, application and communications software to perform the functions of the data network telephone **208**. The operating system may be any suitable commercially available embedded or disk-based operating system, or any proprietary operating system.

The processor **240** includes a media engine **241** and a signaling stack **243** to perform the primary communications and applications functions of the data network telephone **208**. The purpose of the signaling stack in an exemplary data network telephone **208** is to set up, manage, and tear down a call. During the setup phase, a user may use the keypad to enter a user identifier to call. The signaling stack **243** receives the user entry and formats a request message to send to the user identified by the user identifier to initiate a telephone call. The request message is sent to discover the location of the user identified by the user identifier, exchange communication parameters, such as the supported voice CODEC types, and establish the voice channel.

During the management phase, communication proceeds over the voice over data channel. Other parties may be

invited to the call if needed or the existing CODEC can be changed. During the teardown phase, the call is terminated.

The signaling protocol used in the data network telephone **208** in FIG. 2B is the SIP protocol. In particular, the signaling stack implements a User Agent Client **244** and a User Agent Server **242**, in accordance with the SIP protocol. Alternative signaling protocols, such as the ITU-T H.323 protocol and others, may also be used to implement the present invention.

Once the call is setup, the media engine **241** manages the communication over a data communications channel using a network transport protocol and the network interface **210**. The media engine **241** sends and receives data packets having a data payload for carrying data and an indication of the type of data is being transported. The media engine **241** in the data network telephones **208** may sample the voice signals from the audio input **267** (or receive voice samples from the audio input **267**), encode the samples, and build data packets on the sending side. On the receiver side, in addition to performing the reverse operations, the media engine also typically manages a receiver buffer to compensate for network jitter.

The media engine **241** includes hardware and software components for performing speed dial functions **246**, registration functions **147**, voice-over-data functions **249**, display data function **251** and keypad output functions **253**. The media engine **241** processes data that is received from the network **212**, and data that is to be sent over the network **241**.

For data that is received from the network **212**, the media engine **241** may determine from the type of data in the packet whether packets contain sampled voice signals or data for performing other functions. Packets containing sampled voice signals are processed by voice over data function **249**. The voice over data function **249** preferably conforms to a protocol for formatting voice signals as digital data streams. While any suitable protocol may be used, the media (voice signal) is preferably transported via the Real Time Protocol (RTP), which itself is carried inside of User Datagram Protocol (UDP). RTP is described in H. Schulzrinne et al., "RTP: A Transport Protocol for Real-Time Applications," IETF RFC 1889, January 1996, which is incorporated herein by reference. UDP is described in J. Postel, "User Datagram Protocol," IETF RFC 768, August 1980, and IP is described in J. Postel, ed., "Internet Protocol," IETF RFC 791, September 1981, both of which are incorporated by reference herein.

Packets containing data for use in registering the data network telephone **208** with a network telephony service are processed by the registration/provisioning function **247**. By registering the data network telephone **208**, a user may establish with the network telephony service provider that calls addressed to the user's user identifier may be connected to the data network telephone **208**. Provisioning configures the data network telephone **208** with features and other user account information that relate to the service provider.

Registration may occur when the data network telephone **208** sends a request to register to a service provider host, which may occur during power up, if the data network telephone **208** is connected to the network **212**, or when the user connects the data network telephone **208** to the network **212**. The registration/provisioning function **247** may automatically send the Register request when the network is sensed. The service provider host may respond by setting the user's user identifier to correspond to the telephone identifier of the data network telephone **208**, and by acknowledging the request with a status message to the data network

telephone **208**. In one embodiment, the service provider host communicates a response message to the data network telephone that includes a service provider logo and/or a configuration program that programs selected features into the telephone. The selected features may include a speed dial assignment to a customer server, a help menu, a user-friendly display, etc.

Other features may be added to the registration/provisioning functions **247**, or implemented as extensions to the registration functions **247**. For example, the data network telephone **208** may be provisioned to provide selected network telephony features by establishing a data connection with a service provider, requesting the selected services, and receiving data that ensures that the services have been successfully provisioned. Such features may include, for example, caller identification, call forwarding, voice mail, unified voice/email, gateway services, PID-based applications, call conferencing, advertisement enable/disable, and any other service offered by the network telephony service provider to enhance the capabilities of the data network telephone **208**. The requests for features may be made contemporaneously with setting up a new account (as described below with reference to FIGS. **3A-8**). The features may also be requested to modify the service. Users need not be locked into any service plan or feature set. One advantage of such provisioning functions is that services may be ordered for temporary use in a manner that is convenient to the user.

Packets containing data that is to be displayed on the display device are processed by the display data function **251**. The display data function **251** may be used for displaying, for example, the name(s) and user identifier(s) of the other party(-ies) to the call, the status of the telephone call, billing information, and other information. The display data function **251** may also provide access to the display interface **262** for the display of commercial messages sent from the commercial message server **120** (shown in FIG. **2A**). The display data function **251** may process image data and text data that may be contained in and of the messages.

Packets containing data that programs or assigns speed dial keys are processed by the speed dial function **246**. A speed dial key may be programmed during registration with the user identifier of the service provider's customer service department, or to a provisioning service. When a message, or one or more packets, is received, the data in the commercial message is examined for speed dial programming data. The speed dial programming data may include a speed dial key selector to identify the speed dial key being programmed, and a user identifier used to initiate a telephone call when the selected speed dial key is pressed. The speed dial programming data may also include directions to be displayed on the display screen that inform the user that a selected speed dial key has been programmed. In addition, the speed dial programming data may include an icon for display on a touch sensitive screen that describes the user or service to be reached when the icon on the display is touched.

The speed dial programming data may also include an indication of whether the speed dial key is to be programmed permanently, or temporarily. Temporarily programmed keys may be programmed for the duration of the present call only, or for a selected time period. Permanently programmed speed dial keys are programmed until re-programmed later.

For data that is to be sent over the data network **212**, the media engine **241** formats the data as data packets in accordance with a selected protocol. The selected protocol is preferably the protocol that is supported by the data network

telephone that will receive the data for the particular type of data being transported.

The voice over data function **249** formats voice samples according to the protocol used by the receiving data network telephone. In one preferred embodiment, the voice over data function **249** formats voice samples as RTP packets. The registration function **247** and the keypad output function **253** may use RTP or other protocols to transport data that does not represent voice signals.

### 3. Cable Network As An Exemplary Access Network

Referring back to FIG. **2A**, the system **200** includes a cable network **214** connected to the data network **206** by a router **238**. The cable network **214** provides data network access to its members, which in FIG. **2A** include a third data network telephone **218a**, a fourth data network telephone **218b**, a fifth data network telephone **218c**, a workstation **218d**, a second data network connection telephony server **150b** and a network telephony connection database **152b**. The users of the data network telephones **218a-c** connected to the cable network **214** may communicate by telephone over the data network **206** with the users of the data network telephones **208a,b** connected to the local area network **214**.

The cable network **214** includes any digital cable television system that provides data connectivity. In the cable network **214**, data is communicated by radio frequency in a high-frequency coaxial cable. The cable network **214** may include a head-end, or a central termination system that permits management of the cable connections to the users.

The cable network **214** includes high-frequency coaxial cable connections for terminating the members, such as the data network telephones **218a-c** and the workstation **218d**. The third, fourth and fifth data network telephones **218a-c** are preferably similar to the data network telephone **208** described with reference to FIG. **2B**. One difference is that the third, fourth and fifth data network telephones **218a-c** access telephone service over the cable network **214**, and the first and second data network telephones **208a,b** access telephone service over the Ethernet.

### C. Providing Telephone Services By A Data Network Telephony Service Provider

#### 1. Telephony Service Provider

FIG. **2A** shows a service provider host **160** having a service provider server **120** and a service provider database **122**. The service provider server **120** registers data network telephones and performs user interactive connections with users to configure users' telephone accounts. The host **160** is connected to the data network **206**, however, the host **160** may also be connected to either access network **212**, **214**. The host **160** may also include network telephony connection servers, such as server **150a,b**. The host **160** may also communicate with separately located local network telephony connection servers **150**, **152** for billing purposes, or for carrying out the features selected by users. The host **160** may be managed by a telephony service provider or by any entity for a telephony service provider.

The telephony connection server **150b** is preferably a SIP-based server that performs call initiation, maintenance and teardown for the data network telephones **218a-c** connected to the cable network **214**. The telephony connection server **150b** may be similar or identical to the telephony connection server **150a** connected to the local area network **212**. The ISP host **160** includes the service provider server **120** and the service provider database **122**.

The system **200** shown in FIG. **2A** includes a data network telephony system that permits the data network telephones **208a, b** connected to the local area network **212** to communicate with the data network telephones **214** connected to the



cable network 214. The system shown in FIG. 2A uses SIP in order to establish, maintain and teardown sessions, or telephone calls between users.

There are two major architectural elements to SIP: the user agent (UA) and the network server. The UA resides at the SIP end stations, (e.g. the data network telephones), and contains two parts: a user agent client (UAC), which is responsible for issuing SIP requests, and a user agent server (UAS), which responds to such requests. There are three different network server types: a redirect server, a proxy server, and a registrar. The various network server types may be combined into a single server, such as the telephony connection server 150a,b. Not all server types are required to implement the embodiments of the present invention. The communication services to be provided will determine which servers are present in the communication system. Preferred embodiments of the present invention may be carried out using proxy servers.

One example of a SIP operation involves a SIP UAC issuing a request, a SIP proxy server acting as end-user location discovery agent, and a SIP UAS accepting the call. A successful SIP invitation consists of two requests: INVITE followed by ACK. The INVITE message contains a user identifier to identify the callee, a caller user identifier to identify the caller, and a session description that informs the called party what type of media the caller can accept and where it wishes the media data to be sent. User identifiers in SIP requests are known as SIP addresses. SIP addresses are referred to as SIP Uniform Resource Locators (SIP-URLs), which are of the form sip:user@host.domain. Other addressing conventions may also be used.

Redirect servers process an INVITE message by sending back the SIP-URL where the callee is reachable. Proxy servers perform application layer routing of the SIP requests and responses. A proxy server can either be stateful or stateless. A stateful proxy holds information about the call during the entire time the call is up, while a stateless proxy processes a message without saving information contained in the message. Furthermore, proxies can either be forking or non-forking. A forking proxy can, for example, ring several phones at once until somebody takes the call. Registrar servers are used to record the SIP address (called a SIP URL) and the associated IP address. The most common use of a registrar server is for the UAC to notify the registrar where the UAC can be reached for a specified amount of time. When an INVITE request arrives for the SIP URL used in a REGISTER message, the proxy or redirect server forwards the request correctly.

At the local area network 212, the central registrar/proxy server, such as the network telephony server 150a is the primary destination of all SIP messages trying to establish a connection with users on the local area network 212. Preferably, the network telephony server 150a is also the only destination advertised to the SIP clients outside the LAN 212 on behalf of all the SIP clients residing on the LAN 212. The network telephony server 150a relays all SIP INVITE messages to the appropriate final destination (or another SIP proxy), based on a database lookup using the user database 152a. It allows all mobile clients to register with their current locations.

Similarly, the network telephony server 150b is the primary destination of all SIP messages trying to establish a connection with the data network telephones 218a-c connected to the cable network 214. Preferably, the network telephony server 150b is also the only destination advertised to the SIP clients outside the LAN 212 on behalf of all the SIP clients (e.g. data network telephones) residing on the

LAN 212. The network telephony server 150b relays all SIP INVITE messages to the appropriate final destination (or another SIP proxy), based on a database lookup using the user database 152b.

2. Registration of the Telephone

The data network telephones 208a,b and 218a-c in the system 200 preferably have pre-programmed device identifiers (e.g. MAC addresses or phone numbers), represented as SIP-URL's that are of the form sip:8475551212@3com.com. After power-up, each data network telephones 208a,b and 218a-c sends a SIP REGISTER message to the default registrar, such as the network telephony servers 150a,b. When a call arrives at one of the network telephony servers 150a,b for any of the registered SIP URLs, the server will forward the call to the appropriate destination. If a data network telephone is moved to a new location, all calls to the associated SIP URL will still be properly routed to that device. In other words, the system in FIG. 2A provides device mobility in the sense that calls will "follow" the data network telephone according to its SIP URL. This is especially useful if the data network telephone 208a,b or 218a-c is running the DHCP (Dynamic Host Configuration Protocol) so that when the location is changed, the IP address is also automatically changed.

An advantage of the system in FIG. 2A is that the network telephony connection server 150a,b may respond to REGISTER messages (for SIP and similar messages in other protocols) with a message that configures the data network telephone 208a,b or 218a-c to have a variety of ready-to-use features. The service provider may configure the telephony connection server 150a,b to enforce a particular configuration for operation, or offer the user choices of features that comprise the configuration. A data network telephone may be configured to include features such as:

TABLE A

---

40	User identifier: a sequence of alphanumeric elements that uniquely identifies the user. The user identifier may be formatted as an E.164 telephone number, or as a name. The user identifier may be unique throughout the universe of users on the data network telephony system 200 (shown in FIG. 1), or it may acquire such uniqueness by association with a server identifier.
45	Telephone Identifier: a sequence of alphanumeric elements that uniquely identifies the telephone. The telephone identifier may be formatted as an E.164 telephone number, or as a number, such as a MAC address. The telephone identifier may be unique throughout the universe of data network telephones on the data network telephony system 200, or it may acquire such uniqueness by association with a server identifier.
50	The user's name, address and other information that may be used primarily for billing purposes. For example, the user's checking account number, credit card number or other financial information may be provided for automatic billing and payment capabilities.
55	User's telephony service features. The user may subscribe, permanently or temporarily, to one or more telephony service features offered by the service provider: <ul style="list-style-type: none"> <li>Voice mail</li> <li>Caller ID</li> <li>Call Forwarding with true number portability</li> <li>Teleconferencing</li> <li>Commercial messaging - a service that may be made available in embodiments of the present invention. A user may subscribe to have the data network telephone 218 receive (or not to receive) advertisements for display on the display of the data network telephone 218.</li> <li>Commercial messaging with speed dial programming - a service that may be made available in embodiments of the present invention. A user may subscribe to have the data network telephone 218 receive (or not to receive) advertisements that program the speed dial keys of the data network telephone 218. The display of the service provider logo</li> <li>Menu of functions</li> <li>Help menu</li> </ul>
60	
65	

TABLE A-continued

---

Speed dial key programming (e.g. speed dial to customer service)
Features as standard offerings - to compete, a provider may offer features that normally cost extra (e.g. caller ID, etc.) as standard features
Packaged configurations - Features and offerings may be grouped as distinctly priced packages
Functions using PDA connectivity (e.g. Remote Whiteboard communication, control of telephone use through PDA)

---

FIG. 3A shows the data network telephone 208 for User A begin the registration process. User A's telephone 208 may be brand new, in which case, the process described with reference to FIGS. 3A-3D illustrates the ease with which the data network telephone 208 may be installed and used immediately. When User A connects the data network telephone 208 to the network 206 (NOTE: connection may be through an access network), the data network 208 uses its MAC address as an initial telephone identifier. The data network telephone 208 retrieves an IP address using a DHCP Discover message exchange, shown at 271, with a DHCP server 161.

The data network telephone 208 then sends a registration message as shown at 273. In a preferred embodiment, the registration message includes a temporary user identifier (xxxxxxxxxxxxxx) and a version identifier that identifies the current version of the configuration of the telephone 208. FIG. 3B shows a sample registration request at 472 in a message flow diagram.

Referring back to FIG. 3A, the telephony connection server 150a may respond to the registration message at 273 with a response message as shown at 275. The message at 275 includes an auto-configuration command which forces the data network telephone 208 to implement a new configuration. The new configuration may be an update to the current version identified by the current version identifier. FIG. 3B shows a sample of the auto-configuration response at 474. In a preferred embodiment, the auto-configuration message is communicated in the message body of a SIP response message.

The response message at 275 in FIG. 3A may also comprise an exchange of messages using a data channel. FIG. 3B shows a first data channel message 480 having a query to the user in TCP transmitted as TCP/IP. It is to be understood that any other protocol may be used. The message may be formatted for display on the data network telephone 208, as voice over data in a voice mail session, or any other manner conforming to the user interface capabilities of the telephone 208. The user may respond by saying "Yes"/"No", selecting a menu item by touching the screen, pressing a yes/no button, or any other manner conforming to the user interface capabilities of the telephone 208.

The user's response is communicated in a second data channel 482 to the network telephony connection server 150a. If the response was a "Yes" such that the user wants the configuration of the data network telephone 208 updated, the network telephony connection server 150a responds with the updated version at 484.

Referring to FIG. 3C, the data network telephone 208 is shown as having been registered. The data network telephone 208 is shown configured with a phone number (user identifier), a service provider logo (xyz) and a hotlink, or display button programmed to dial customer service at 116 for the service provider. The service provider host 160 may configure the data network telephone with a full set of features, such as from those listed above, to allow the user to make full use of the data network telephone 208.

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65

In an alternative embodiment, the registration process leaves the data network telephone 208 with a rudimentary configuration barely able to make any telephone calls. For example, the process may leave the data network telephone 208 capable of making only one call, to customer service for a user controlled provisioning of the system. The user may also provision the telephone 208 using a connection to the service provider's web page.

As shown in FIG. 4A, the user at data network telephone 208 makes a call at 281 to the service provider server 120 with its user identifier (xxxxxxxxxxxxxx), and a command to request service provisioning. A provisioning function, in response to the telephone call at 281, establishes a data connection 283 to perform the transfer (which may be with voice over data signals) of information. The service provider server 120 may send a form, or present an order screen 316, at the telephone requesting information from the user. The user may also use a workstation and connect at 287 to a web page 451 at the service provider server 120 and enter the information at a web page order screen 317. The information requested in both the order screen 316 and the web page order screen 317 is illustrated in FIG. 4B. One of ordinary skill in the art will appreciate that the web page order screen 317 is illustrated as an example of the type of information requested during a provisioning session. More or less information may be requested.

Referring to FIG. 4C, when the user has entered the data requested in the order screen, the service provider server 120 leaves a ready display 416 at the data network telephone 208 indicative of the type of configuration provided by the provisioning process. The service provider server 120 may also leave a confirmatory message 417 on the workstation (or on the data network telephone, either on the display or by voice) indicating what happens next. FIG. 4D shows an example of such a confirmatory message. Once the user responds to the email, the data network telephone 208 is ready for use.

The service provider server 120 also builds and stores in the service provider database 122 a user account 455 for the user as shown in FIG. 4A.

3. A Telephone Call

FIG. 5 shows the interaction between the components in FIG. 2A in performing a telephone call. As shown in FIG. 5, a telephony service provider (e.g. ISP) provides telephone service using the host 160. The telephony service provider may also provide data connectivity services and other services relating to communication (e.g. advertising) on the data network 206. With User A and User B registered with network telephony connection servers 150a,b respectively, the telephony connection server 150b operates as a proxy server (e.g. as a SIP proxy server) for User B's data network telephone 218. When other users, such as User A, attempt to call User B, the call setup will be made through the telephony connection server 150b.

As shown in FIG. 5, User A initiates a telephone call from User A's data network telephone 208 to the data network telephone 218 belonging to User B. User A begins the telephone call by dialing User B's user identifier using the keypad 118 (or a PID, or a speed dial key, or using any other manner). The data network telephone 208 sends a request to initiate a call to User B at 280 to the data network telephony connection 150b providing service to User B. The request to initiate a call to User B at 280 includes User B's user identifier as the callee, User A's user identifier as the caller and the protocols supported by User A's data network telephone 208.

The telephony connection server 150b sends the request to the data network telephone 218 identified in the user

database **152b** as belonging to User B, preferably, in accordance with its role as a proxy server, and preferably as defined in the SIP protocol. The data network telephone **218** responds with a response message (not shown in FIG. **5**) to the telephony connection server **150b**. The telephony connection server **150b** receives the response message and sends the response message to User A's data network telephone **208** as shown at **282**.

User A's data network telephone **208** receives the response message and may prepare an acknowledgement message if called for by the protocol (e.g. the SIP protocol).

User A's data network telephone **208** also establishes a voice over data channel **284** to permit communication between User A and User B. The voice over data channel **284** is preferably a data communications channel in which voice signals that have been converted to digital information are being carried as data messages in accordance with a selected protocol. The data messages include User B's message **286** and User A's messages **288** as shown in FIG. **5**. User B's message **286** and User A's message **288** both include an IP protocol component, a UDP component, an RTP component and a G.72x component.

The IP protocol component permits routing of the messages **286**, **288** in accordance with an Internet Protocol (e.g. Ipv4, IPV6, etc.). The UDP component permits transport as a User Datagram in a connection-less environment in accordance with the User Datagram Protocol (UDP). The RTP component is the chosen format for communicating the voice signals as data. The G.72x component indicates how the voice signals, once extracted from the RTP component are to be processed to produce audio. The G.72x indication represents that the voice signals may conform to ITU-T Recommendation G.721, ITU-T Recommendation G.722, ITU-T Recommendation G.723, ITU-T Recommendation G.723.1, ITU-T Recommendation G.728 or ITU-T Recommendation G.729. The voice signals may also conform to ITU-T Recommendation G.711 or to any other suitable protocol.

One of ordinary skill in the art will appreciate that the voice over data channel **284** may be implemented using different protocols than the ones shown in FIG. **5**. Moreover, when the signaling protocol used to establish the telephone call permits negotiation of supported protocols as is done with the preferred SIP protocol, the voice over data channel **284** may be asymmetrical; that is, User A's messages **288** may be different from User B's messages **286**.

The telephone call carried out over the voice over data channel **284** proceeds until one or both users terminate the call. During termination or teardown of the call, the telephony connection server **150b** performs in accordance with the selected session protocol such as the SIP protocol.

FIGS. **3A–5** show systems and methods for registering and auto-configuring a data network telephone **208** in accordance with embodiments of the present invention. Those of ordinary skill in the art will appreciate that the systems and methods described above are examples. Other embodiments may fall within the scope of the claims.

#### D. Methods For Providing Registration and Provisioning of a Data Network Telephone Using A Data Network Telephony System

FIGS. **6–8** illustrate methods for providing registration and provisioning for a data network telephone that may be performed using any suitable data network telephony system. FIG. **6** is a flowchart showing a method of configuring a data network telephone by registering for service with a service provider. As shown at step **500** in FIG. **6**, a data network telephone starts by obtaining an IP address from a

DHCP server. At step **502**, a request to register message is sent to a service provider server. The service provider server may have a designated default proxy server to use, or may provide the appropriate server with a call management protocol and/or registration server. In the request to register message, the data network telephone includes a current version of the telephone configuration as shown at step **502**. The version of the telephone configuration may include different combinations of the features listed above in Table A.

At step **506**, the service provider server **120** (FIG. **1**) checks the telephone version with the latest version available. An OR step **506** in the flowchart of FIG. **6** indicates that alternative steps may be taken. At step **507**, the service provider server **120** may automatically re-configure the data network telephone. Alternatively, the service provider server may query the user to determine whether to upgrade to a new version at decision block **508**. A yes response to the query leads to step **510** to re-configure the data network telephone.

One advantage of registering in the manner shown in FIG. **6** is that a full-function feature laden configuration of the data network telephone is possible using a register request.

FIG. **7** is a flowchart that shows a method for registering the data network telephone with partial or low-level service so that the user may provision the data network telephone as a completely personalized data network telephone. At step **600** in FIG. **7**, the data network telephone requests an IP address from a DHCP server. The request to register is sent at step **602** to the default proxy server. At step **604**, the user proceeds to a method for provisioning the data network telephone.

FIG. **8** shows a preferred method for provisioning the data network telephone. At step **700**, the user connects to the service provider's web page for providing user account information. At step **702**, the user enters billing information. At step **704**, the user enters user-selectable user identifiers, passwords, email identifiers, etc. At step **706**, the user selects features that the user would like to add, and at step **708**, the account information is submitted. A confirmatory message and email is received at step **710**. When the user responds to the email at step **712**, the data network telephone may be used.

While the invention has been described in conjunction with presently preferred embodiments of the invention, persons of skill in the art will appreciate that variations may be made without departure from the scope and spirit of the invention. For example, the access networks shown in FIG. **2A** may comprise any other suitable type of local area network or service infrastructure.

In addition, protocols of various types are referenced throughout. While preferred and alternative embodiments may implement selected protocols, any suitable replacement protocol not mentioned, or any function not part of a protocol used to replace a corresponding function from a protocol may be implemented without departing from the scope of the invention.

This true scope and spirit is defined by the appended claims, interpreted in light of the foregoing.

We claim:

1. A system for providing telephone service comprising:
  - at least one data network telephone connected to a data network operable to provide a plurality of data communication channels, the data network telephone being operable to communicate voice signals as data packets on a voice over data channel, the voice over data channel being one of the plurality of data communications channels on the data network containing packetized voice signals;

19

the data network telephone being operable to convert data packets communicated on the voice over data channel to voice;

the data network telephone being operable to perform a plurality of feature enhancements; and

a service provider server connected to the data network, the service provider server (i) operable to provide to a user with a web page order screen in a web browser of a workstation, the web page order screen allowing the service provider server to obtain a user-selected configuration comprising at least one feature enhancement of the data network telephone; and (ii) to present to the user a confirming message that indicates to the user that the data network telephone is provisioned with at least one feature enhancement that the user selected.

2. The system of claim 1, wherein the service provider server includes a registration function to automatically configure the data network telephone with a first configuration when the data network telephone has not been configured for service to a data network.

3. The system of claim 1 wherein the service provider server includes a registration function to query a user to determine whether to configure the data network telephone with a second configuration.

4. A service provider server comprising:

a network interface for communicating over at least one data communications channel;

an accounts database for accessing a user account having a user telephone service account for using a data network telephone;

a provisioning function to provide a feature request form to a user on one of the data communications channels, the feature request form being (i) presented to the user in a web browser of a workstation (ii) and operable to receive user input to select at least one feature enhancement with which the data network telephone is to be provisioned;

a service configuration function to send a message to the data network telephone to activate the service enhancements and to present to the user a confirming message that indicates to the user that the data network telephone is provisioned with the at least one feature enhancement that the user selected.

20

5. The system of claim 1, wherein the service provider server being operable to present to the user a confirming message comprises the service provider server being operable to send a confirming message to the workstation that causes the workstation to present to the user the confirming message.

6. The system of claim 1 wherein the service provider server being operable to present to the user a confirming message comprises the service provider server being operable to send a confirming message to the data network telephone that causes the data network telephone to present to the user the confirming message.

7. The service provider of claim 4 wherein the provisioning function is accessed via an E.164 telephone number.

8. A method for providing a user selected configuration for a data network telephone comprising the steps of:

receiving a request to configure the data network telephone from the user;

presenting a user feature request form in a web browser of a workstation, the user feature request form prompting the user to select features with which the data network telephone is to be provisioned;

setting a user account in accordance with the selected features;

sending a configuration message to provision the data network telephone with the features selected; and

causing a confirming message to be presented to the user, the confirming message indicating to the user that the data network telephone is provisioned with the features selected by the user.

9. The method of claim 8, wherein causing a confirming message to be presented to the user comprises sending a confirming message to the workstation that causes the workstation to present to the user the confirming message.

10. The method of claim 8 wherein causing a confirming message to be presented to the user comprises sending a confirming message to the data network telephone that causes the data network telephone to present to the user the confirming message.

\* \* \* \* \*